TPBC847BS

NPN Small Signal Surface Mount Transistor


WWW.TECHPUBLIC.COM

Features


- Epitaxial die construction
- Ultra-small surface mount package

Mechanical Data

- Case: SOT-363
- Molding compound: UL flammability classification rating 94V-0
- Terminals: Tin-plated; solderability per MIL-STD-202, Method 208

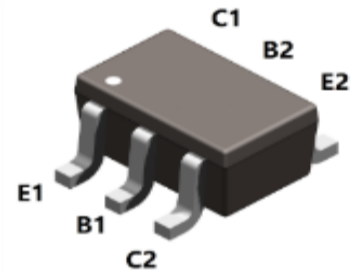

SOT-363



Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Collector-Base Voltage	V_{CBO}	50	V
Collector-Emitter Voltage	V_{CEO}	45	V
Emitter-Base Voltage	V_{EBO}	6	V
Collector Current (Continuous)	I_C	100	mA
Collector Current (Peak)	I_{CM}	200	mA

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation (T_A = 25°C)	P_D	300	mW
Thermal Resistance (Junction-to-Ambient)	$R_{\theta JA}$	417	°C/W
Operating Junction Temperature	T_J	-55 ~ +150	°C
Storage Temperature Range	T_{STG}	-55 ~ +150	°C

TPBC847BS

NPN Small Signal Surface Mount Transistor

Electrical Characteristics (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	I_C = 10μA, I_E = 0	50	-	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	I_C = 10mA, I_B = 0	45	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	I_E = 10μA, I_C = 0	6	-	-	V
Collector Cut-off Current	I_{CBO}	V_{CB} = 30V, I_E = 0	-	-	15	nA
		V_{CB} = 30V, I_E = 0 T_J = 150°C	-	-	5	μA
Emitter-base Cut-off Current	I_{EBO}	V_{EB} = 5V, I_C = 0	-	-	100	nA
Collector-emitter Cut-off Current	I_{CEO}	V_{CE}= 30V, I_B = 0	-	-	1	mA
DC Current Gain	h_{FE}	V_{CE} = 5V, I_C = 2mA	200	-	450	-
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	I_C = 10mA, I_B = 0.5mA	-	-	0.25	V
		I_C = 100mA, I_B = 5mA	-	-	0.65	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	I_C = 10mA, I_B = 0.5mA	-	0.70	0.90	V
		I_C = 100mA, I_B = 5mA	-	0.90	1.10	V
Base-Emitter Voltage	$V_{BE(ON)}$	V_{CE} = 5V, I_C= 2mA	0.58	-	0.70	V
		V_{CE} = 5V, I_C= 10mA	-	-	0.77	V
Transition Frequency	f_T	V_{CE} = 5V, I_C= 20mA f = 100MHz	200	-	-	MHz
Collector Capacitance	C_C	V_{CB} = 10V, I_E = I_e = 0 f = 1MHz	-	-	2	pF

TPBC847BS

NPN Small Signal Surface Mount Transistor

Ratings and Characteristic Curves (@ T_A = 25°C unless otherwise specified)

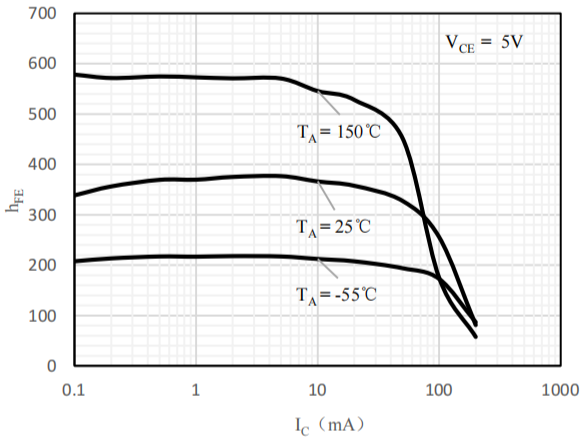


Fig 1 h_{FE} vs. I_C

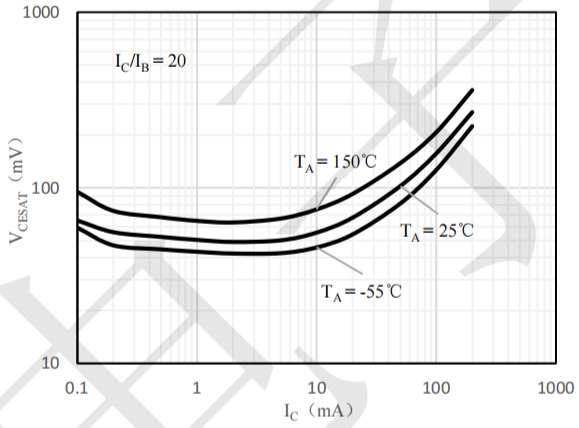


Fig 2 $V_{CE(sat)}$ vs. I_C

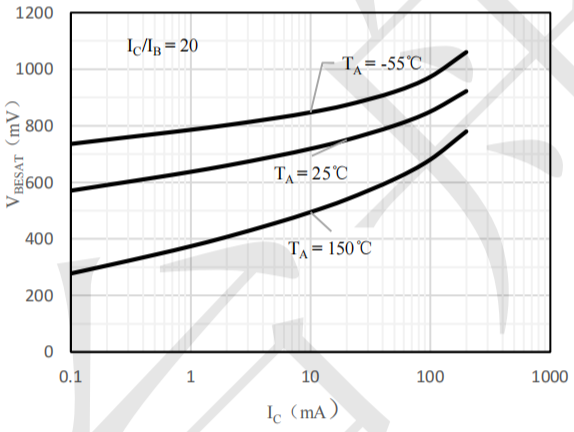


Fig 3 $V_{BE(sat)}$ vs. I_C

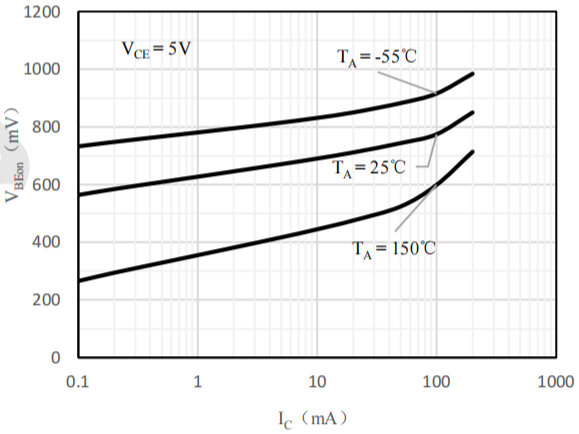



Fig 4 $V_{BE(ON)}$ vs. I_C

TPBC847BS

NPN Small Signal Surface Mount Transistor

Package Outline Dimensions (Unit: mm)

SOT-363

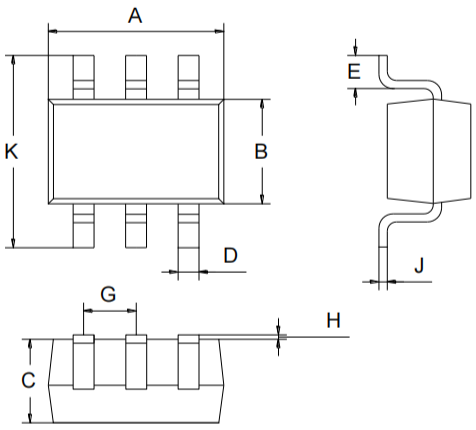

SOT-363		
Dimension	**Min.**	**Max.**
A	2.00	2.20
B	1.15	1.35
C	0.85	1.05
D	0.15	0.35
E	0.25	0.40
G	0.60	0.70
H	0.02	0.10
J	0.05	0.15
K	2.20	2.40

Package Outline Dimensions (Unit: mm)

