TPSM82480 5.5V 输入、6A 降压转换器模块

1 选项

- 超小型 7.9 x 3.6 x 1.5mm 电源模块
- 输出电流为 6A
- 反馈电压精度为 ±1%
- 输入电压范围：2.4V 至 5.5V
- 输出电压范围：0.6V 至 5.5V
- 典型静态电流为 23μA
- 输出电压选择
- 相移操作
- 自动节能模式
- 强制 PWM 模式 选项
- 可调节软启动
- 电源正常和温度正常输出
- 欠压锁定
- 过流和短路保护
- 过热保护
- 工作温度范围：-40°C 至 125°C

2 应用

- 薄型负载点电源
- 存储、服务器、适配卡
- 工业 PC/嵌入式 PC/FPGA 电源
- 无线基站
- 测试和测量

3 说明

TPSM82480 是一款适用于低厚度负载点电源的同步降压直流/直流转换器模块。2.4V 至 5.5V 的输入电源范围使其既可以通过典型的 3.3V 或 5V 接口电源运行，也可以通过低至 2.4V 的备份电路运行。

输出电流最大可达 6A，由每相各为 3A 的两相电源持续提供，能够以异相运行，显著降低脉冲电流噪声。

TPSM82480 可在超轻负载时自动进入省电模式，并能保持高效率。其中包含自动增加/减少相位功能，具体使用一个相位还是两个相位视实际负载情况而定。可通过“模式”功能关闭省电模式。


器件可提供电源正常信号和可调软启动。此外，该器件还 具有 温度正常信号指示内部温度过高。通过 VSEL 引脚可将输出电压更改为预选值。TPSM82480 能够以 100% 的占空比模式运行。

器件信息(1)

器件型号	封装	封装尺寸（标称值）
TPSM82480MOP	QFM (24)	7.90 × 3.60 x 1.55mm


(1) 如需了解所有可用封装，请参阅数据表末尾的可订购产品附录。

典型应用电路原理图

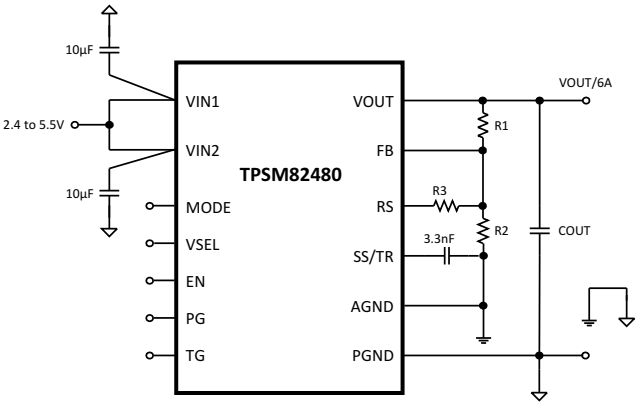

Copyright © 2017, Texas Instruments Incorporated

效率与输出电流间的关系

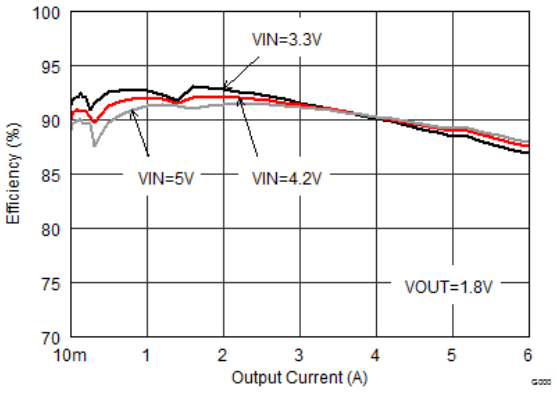

目录

1 选项 1
2 应用 1
3 说明 1
4 修订历史记录 2
5 **Pin Configuration and Functions** 3
6 **Specifications** 4
6.1 Absolute Maximum Ratings 4
6.2 ESD Ratings 4
6.3 Recommended Operating Conditions 4
6.4 Thermal Information 4
6.5 Electrical Characteristics 5
6.6 Typical Characteristics 7
7 **Detailed Description** 8
7.1 Overview 8
7.2 Functional Block Diagram 8
7.3 Feature Description 9
7.4 Device Functional Modes 10
8 **Application and Implementation** 12
8.1 Application Information 12
8.2 Typical Application 12
8.3 System Examples 22
9 **Power Supply Recommendations** 22
10 **Layout** 23
10.1 Layout Guidelines 23
10.2 Layout Example 23
11 器件和文档支持 24
11.1 文档支持 24
11.2 接收文档更新通知 24
11.3 社区资源 24
11.4 商标 24
11.5 静电放电警告 24
11.6 Glossary 24
12 机械、封装和可订购信息 24

4 修订历史记录


Changes from Original (July 2017) to Revision A **Page**


- 已更改 将数据表状态从“预告信息”更改成了“生产数据”。 1

Copyright © 2017–2018, Texas Instruments Incorporated

5 Pin Configuration and Functions

MOP Package
24-Pin QFM

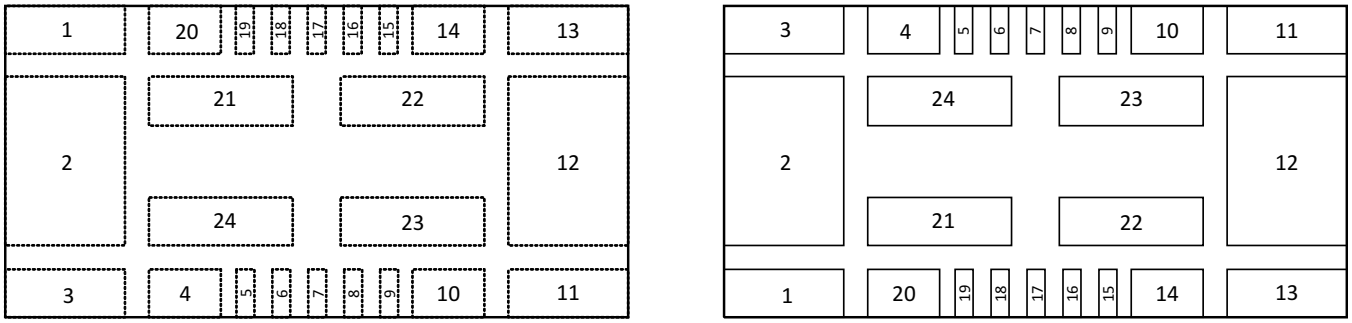

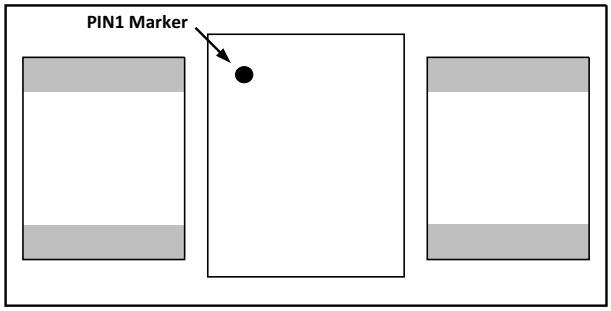

Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO.		
VOUT1	1		Output Voltage Node Phase 1 (master), Must be connect with VOUT2
PGND1	2, 3, 20,21		Power Ground Phase 1 (master)
VIN1	4, 24		Supply voltage Phase 1 (master)
EN	5		Enable input (High=Enabled, Low = Disabled)
PG	6		Power Good (open drain, requires pull-up resistor)
VSEL	7		Output Voltage Select (High = VOUT2, Low=VOUT1) , VOUT1 < VOUT2
TG	8		Thermal Good (open drain, requires pull-up resistor)
MODE	9		Operating mode selection (Low=Automatic PWM/PSM, High = Forced PWM)
VIN2	10, 23		Supply voltage Phase 2
PGND2	11,12, 14, 22		Power Ground Phase 2
VOUT2	13		Output Voltage Node Phase 2, Must be connected with VOUT1
SS/TR	15		Soft-Start / Tracking. An external capacitor connected to this pin sets the output voltage rise time.
AGND	16		Analog Ground
FB	17		Output voltage feedback for the adjustable version. Connect resistive voltage divider to this pin.
RS	18		Resistor Select. Connect resistor that sets the level for the second output voltage here (activated by VSEL= High)
VO	19		VOUT detection (connect to VOUT, output discharge is internally connected to this pin)

Copyright © 2017–2018, Texas Instruments Incorporated

6 Specifications

6.1 Absolute Maximum Ratings

		MIN	MAX	UNIT
Pin Voltage Range(1)	VIN	-0.3	6	V
	EN, VSEL, MODE, SS/TR, PG, TG	-0.3	6	V
	FB, RS	-0.3	3	V
Power Good / Thermal Good Sink Current	PG, TG		10	mA
Operating Junction Temperature Range, T_J		-40	150	°C
Storage Temperature Range, T_{stg}		-65	150	°C

(1) All voltages are with respect to network ground terminal.

6.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins(1)	±1000	V
		Charged device model (CDM), per JEDEC specification JESD22-C101, all pins(2)	±500	

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

	MIN	TYP	MAX	UNIT
Supply Voltage Range, V_{IN}	2.4		5.5	V
Output Voltage Range, V_{OUT}	0.6		5.5	V
Maximum Output Current, I_{OUT}	6			A
Operating junction temperature, T_J	–40		125	°C

6.4 Thermal Information

THERMAL METRIC(1)		TPSM82480 MOP 24 PINS JEDEC with thermal vias	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance	32.2	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	13.6	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	11.5	°C/W
ψ_{JT}	Junction-to-top characterization parameter	0.53	°C/W
ψ_{JB}	Junction-to-board characterization parameter	11.3	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	-	°C/W

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, SPRA953.

Copyright © 2017–2018, Texas Instruments Incorporated

6.5 Electrical Characteristics

over operating junction temperature range (T_J = –40°C to 125°C) and V_{IN} = 2.4 V to 5.5 V. Typical values at V_{IN} = 3.6 V and T_J = 25°C (unless otherwise noted).

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
SUPPLY							
V_{IN}	Input Voltage Range	V_{IN} rising		2.6		5.5	V
		V_{IN} falling		2.4		5.5	
I_Q	Operating Quiescent Current	EN = High, V_{IN} ≥ 3 V, I_{OUT} = 0 mA, device not switching, T_J = -40°C to +85°C			23	38	µA
		100% Mode operation			3.5	6.5	mA
I_{SD}	Shutdown Current	EN = Low (≤ 0.3 V), T_J = -40°C to +85°C			0.5	18.5	µA
V_{UVLO}	Undervoltage Lockout Threshold	Falling Input Voltage		2.2	2.3	2.4	V
		Hysteresis			200		mV
T_{SD}	Thermal Shutdown Temperature	PWM Mode, Rising Junction Temperature			160		°C
	Thermal Shutdown Hysteresis	PWM Mode			10		
CONTROL (EN, VSEL, MODE, SS/TR, PG, TG)							
V_H	Input Threshold Voltage (EN, VSEL, MODE)	to ensure High Level		1.2			V
V_L	Input Threshold Voltage (EN, VSEL, MODE)	to ensure Low Level				0.4	
$I_{LKG(EN)}$	Input Leakage Current (EN)	EN = V_{IN} or GND			10	200	nA
$I_{LKG(MODE)}$	Input Leakage Current (MODE, VSEL)				10	200	nA
$I_{SS/TR}$	SS/TR pin source current			4.7	5.25	5.8	µA
$V_{TH(TG)}$	Thermal Good Threshold Temperature	PWM Mode			120		°C
	Thermal Good Hysteresis	PWM Mode			10		
$V_{TH(PG)}$	Power Good Threshold Voltage	Rising (%V_{OUT})		93%	96%	99%	
		Falling (%V_{OUT})		89%	92%	95%	
$V_{L(PG)}$	Output Low Threshold (PG, TG)	I_{PG} = -2 mA				0.4	V
$I_{LKG(PG)}$	Input Leakage Current (PG)				2	700	nA
$I_{LKG(TG)}$	Input Leakage Current (TG)				2	100	nA
t_{SS}	Internal Soft-Start Time	SS/TR = V_{IN} or floating			80		µs
t_{DELAY}	Time from EN rising until start switching			100	200	400	µs
POWER SWITCH							
$R_{DS(ON)}$	High-Side MOSFET ON-Resistance	V_{IN} ≥ 3 V	Phase1		36	98	mΩ
			Phase2				
	Low-Side MOSFET ON-Resistance		Phase1		29	72	mΩ
			Phase2				
I_{LIM}	High-Side MOSFET Current Limit	per phase		4.2	5.0	5.8	A

Copyright © 2017–2018, Texas Instruments Incorporated

Electrical Characteristics (continued)

over operating junction temperature range (T_J = –40°C to 125°C) and V_{IN} = 2.4 V to 5.5 V. Typical values at V_{IN} = 3.6 V and T_J = 25°C (unless otherwise noted).

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
OUTPUT							
V_{REF}	Internal Reference Voltage				0.6		V
$I_{LKG(FB)}$	Input Leakage Current (FB)	EN = High	V_{FB} = 0.6 V		1	65	nA
$I_{LKG(RS)}$	Input Leakage Current (RS)		VSEL = Low, V_{RS} = 0.6 V		1	65	nA
R_{RS}	Internal resistance (RS to GND)		VSEL = High, I_{RS} = 1 mA		10	50	Ω
V_{OUT}	Output Voltage Range	$V_{IN} \geq V_{OUT}$		0.6		5.5	V
V_{OUT}	Feedback Voltage Accuracy	PWM Mode, $V_{IN} \geq V_{OUT}$ + 1 V	T_J = –20°C to 85°C	-1%		1%	
			T_J = –40°C to 125°C	-1.4%		1.3%	
V_{OUT}	Feedback Voltage Accuracy	Power Save Mode, L = 0.47 µH, C_{OUT} = 4 x 22 µF(1)		-1.4%		2.5%	
	Output Discharge Current(2)	EN = Low, V_{OUT} = 2.5 V			120		mA
	Load Regulation	V_{OUT} = 1.8 V, PWM mode operation			0.02		%/A
	Line Regulation	2.6 V ≤ V_{IN} ≤ 5.5 V, V_{OUT} = 1.8 V, I_{OUT} = 6 A, PWM mode operation			0.02		%/V

(1) The output voltage accuracy in Power Save Mode can be improved by increasing the output capacitor value, reducing the output voltage ripple.
(2) For detailed information on output discharge see *Active Output Discharge*.

版权 © 2017–2018, Texas Instruments Incorporated

6.6 Typical Characteristics

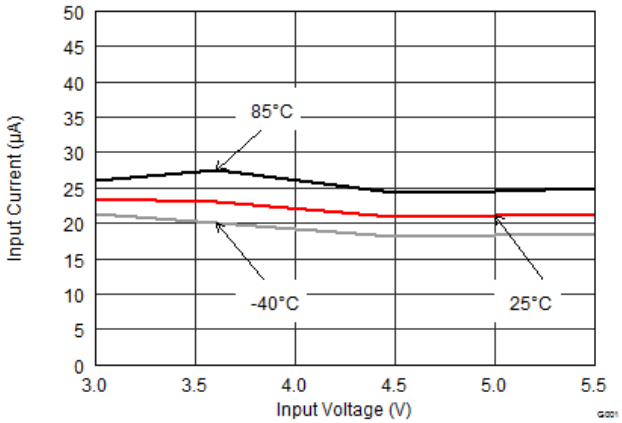


图 2. Quiescent Current

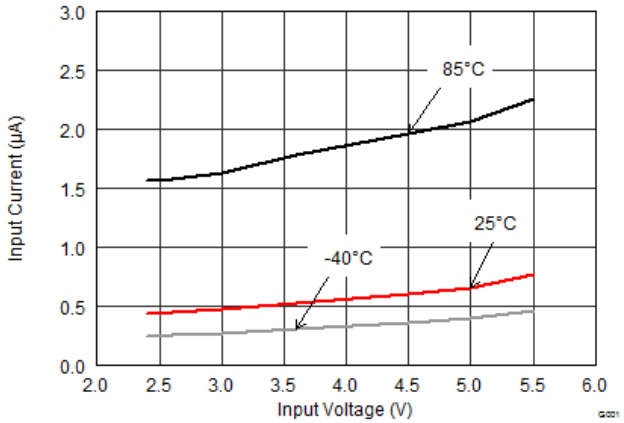


图 3. Shutdown Current

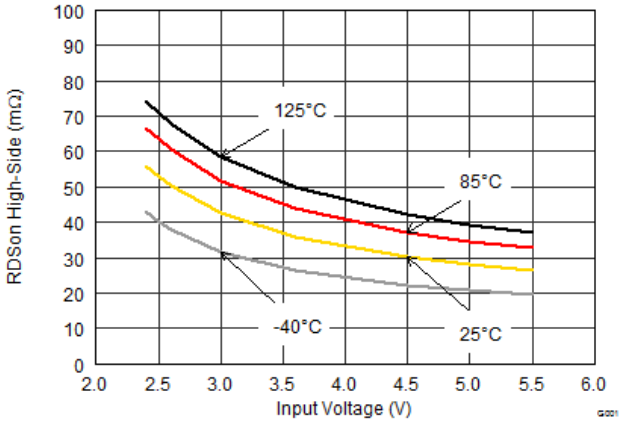


图 4. High-Side Switch Resistance

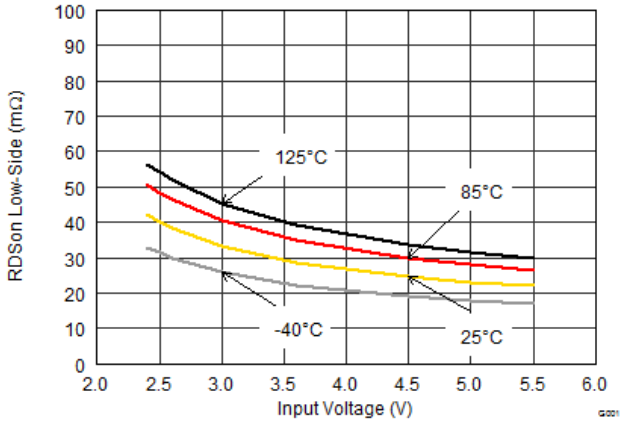


图 5. Low-Side Switch Resistance


7 Detailed Description

7.1 Overview

The TPSM82480 is a high efficiency synchronous switched mode step-down converter module based on a 2-phase peak current control topology. It is designed for smallest solution size low-profile applications, converting a 2.4 V to 5.5 V input voltage into a lower 0.6 V to 5.5 V output voltage. While an outer voltage loop sets the regulation threshold for the inner current loop, based on the actual V_{OUT} level, the inner current loop regulates to the actual peak inductor current level for every switching cycle. The regulation network is internally compensated. While the ON-time is determined by duty cycle, inductance and cycle peak current, the switching frequency of typically 2.2 MHz is set by a predicted OFF-time. The device features a Power Save Mode (PSM) to keep the conversion efficiency high over the whole load current range.

The TPSM82480 is a 2-phase converter, sharing the load among the phases. Identical in construction, the second phase control is connected with an adaptive delay to the first phase. Both the phases use the same regulation threshold and cycle-by-cycle peak current setpoint. This ensures a phase-shifted as well as current-balanced operation. Using the advantages of the 2-phase topology, a 6-A continuous output current is provided with high performance and as small as possible solution size.

7.2 Functional Block Diagram

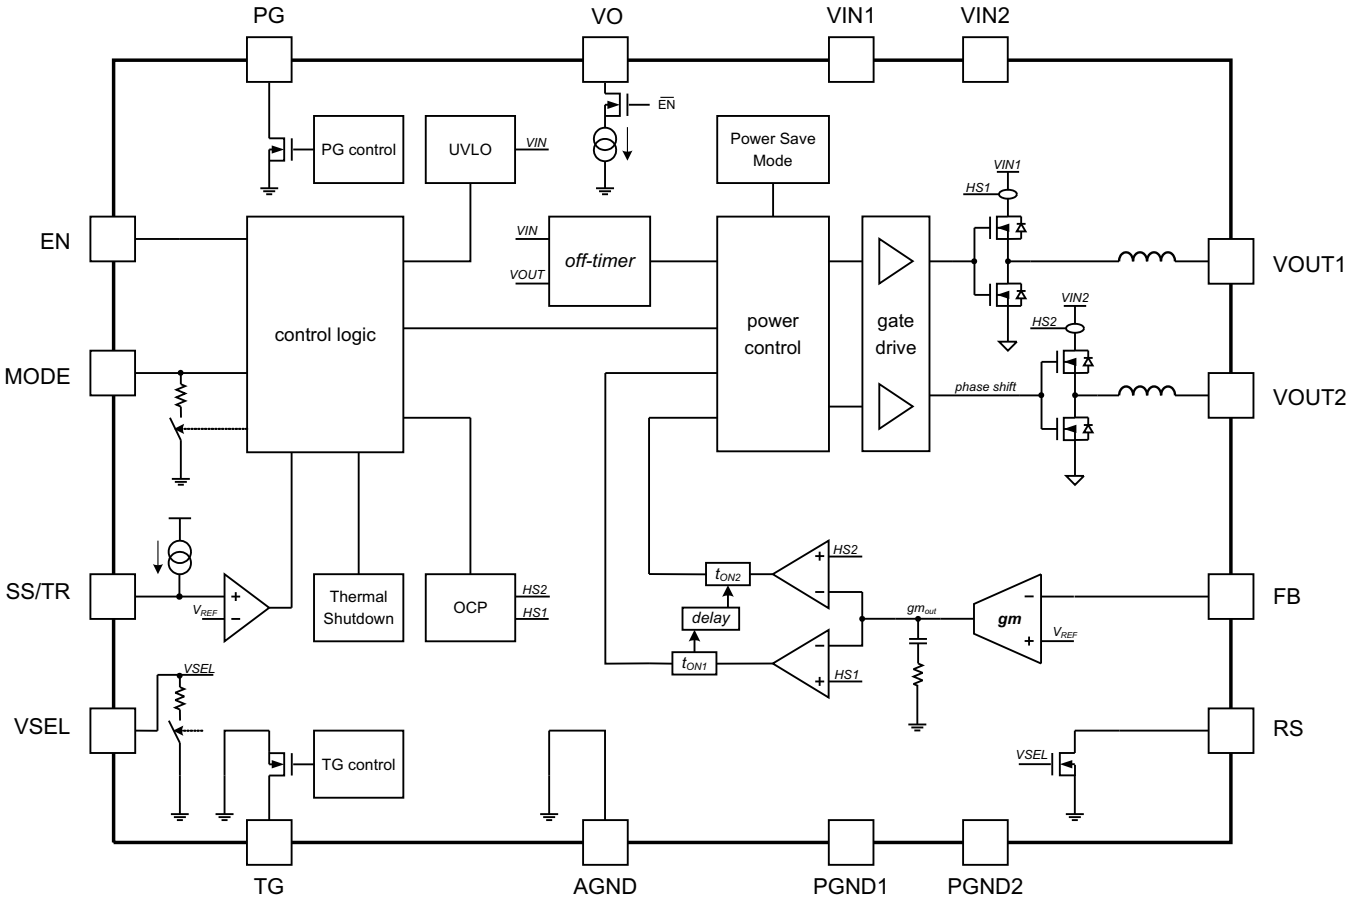

Copyright © 2017, Texas Instruments Incorporated

图 6. TPSM82480

版权 © 2017–2018, Texas Instruments Incorporated

7.3 Feature Description

7.3.1 Enable / Shutdown (EN)

The device starts operation, when VIN is present and enable (EN) is set High. Since the boundary EN thresholds are specified with 1.2 V for rising and 0.4 V for falling voltages, the typical values are 0.85 V (rising) and 0.65 V (falling). The device is disabled by pulling EN Low. Leaving the EN pin floating is not recommended.

7.3.2 Soft Start (SS), Pre-biased Output

The internal soft start circuit controls the output voltage slope during startup. This avoids excessive inrush current and provides an adjustable controlled output-voltage rise time. The soft start also prevents unwanted voltage drop from high impedance power sources or batteries.

When EN is set to start device operation, the device starts switching after a delay of typically 200 µs and VOUT rises with a slope, controlled by the external capacitor which is connected to the SS/TR pin (soft start). Leaving the SS/TR pin floating or connecting to VIN provides internally set fastest startup with a soft start slope of about 80us. See *Application Curves* for typical startup operation.

The device can start into a pre-biased output. In this case, the device starts switching, only when the internal set point for VOUT increases above the pre-biased voltage level.

7.3.3 Tracking (TR)

The device tracks an external voltage applied to the SS/TR pin. The FB voltage tracks the external voltage as long as it is below about 0.6V. Above 0.6V the device goes to normal operation. If the voltage at the SS/TR pin decreases below about 0.6V, the FB voltage tracks again this voltage. See *Tracking* for further details.

7.3.4 Output Voltage Select (VSEL)

A resistive divider (VOUT to FB to AGND) sets the output voltage of the TPSM82480. Providing a logic High level at the VSEL pin, the RS pin is pulled to ground, so that a resistor, between FB and RS pins is connected in parallel to the lower resistor of the divider. This sets a different higher output voltage and can be used for dynamic voltage scaling (see *Setting V_{OUT2} Using the VSEL Feature*).

If the VSEL pin is set Low, the device connects an internal pull down resistor to the pin, keeping the internal logic level Low, even if the pin is floating afterwards. The device disconnects the resistor, if the pin is set to High.

7.3.5 Forced PWM (MODE)

To avoid *Power Save Mode (PSM) Operation*, the device can be forced to PWM mode operation by pulling the MODE pin High. In this case the device operates continuously with it's nominal switching frequency and the minimum peak current can go as low as -500 mA.

If the MODE pin is set Low, the device connects an internal pull down resistor to keep the internal logic level Low, even if the pin is floating afterwards. The device disconnects the resistor, if the pin is set to High.

7.3.6 Power Good (PG)

The TPSM82480 has a built in power good function. The PG pin goes High, when the output voltage has reached its nominal value. Otherwise, including when disabled, in UVLO or thermal shutdown, PG is Low. The PG pin is an open drain output that requires a pull-up resistor and can sink typically 2mA. If not used, the PG pin can be left floating or grounded.

7.3.7 Thermal Good (TG)

As long as the junction temperature of the TPSM82480 is below the thermal good temperature of typically 120°C, the logic level at the TG pin is High. If the junction temperature exceeds that temperature, the TG pin goes Low. This can be used for the system to take action preventing excessive heating or even thermal shutdown. The TG pin is an open drain output that requires a pull-up resistor and can sink typically 2mA. If not used, the TG pin can be left floating or grounded.

版权 © 2017–2018, Texas Instruments Incorporated

Feature Description (接下页)

7.3.8 Active Output Discharge

The VO pin, connected to the output voltage, provides an active discharge path when the device is switched off by setting EN Low or UVLO event. In case of being activated, this discharge circuit sinks typically 120mA for output voltages of typically 1 V and above. If V_{OUT} is lower, the active current sink enters linear operation mode and the discharge current decreases.

7.3.9 Undervoltage Lockout (UVLO)

The undervoltage lockout prevents misoperation of the device, if the input voltage drops below the UVLO threshold which is set to typically 2.3 V. The converter starts operation again once the input voltage exceeds the threshold by a hysteresis of typically 200 mV.

7.3.10 Thermal Shutdown

The junction temperature (T_J) of the device is monitored by an internal temperature sensor. If T_J exceeds 160°C (typical), the device goes in thermal shutdown with a hysteresis of about 10°C. Both the power FETs are turned off and the PG pin goes Low. Once T_J has decreased enough, the device resumes normal operation with Soft Start.

7.4 Device Functional Modes

7.4.1 Pulse Width Modulation (PWM) Operation

The TPSM82480 is based on a predictive OFF-time peak current control topology, operating with PWM in continuous conduction mode for current loads larger than half the ripple current. The switching frequency is typically 2.2MHz. Both the master and follower phase regulate to the same VOUT level, each with a separate current loop, using the same peak current set point, cycle by cycle. This provides excellent peak current balancing, independent of inductor dc resistance matching. Since the follower phase operates with an adaptive delay to the master phase, phase shifted operation is always obtained. If the load current decreases, the device runs with the master phase only (see *Phase Add/Shed and Current Balancing*).

PWM only mode can be forced by pulling MODE pin High. If MODE is set Low, the device features an automatic transition into Power Save Mode, entered at light loads, running in discontinuous conduction mode (DCM).

7.4.2 Power Save Mode (PSM) Operation

As the load current decreases to half the ripple current, the converter enters Power Save Mode operation. During PSM, the converter operates with reduced switching frequency maintaining high conversion efficiency. Power Save Mode is based on an adaptive peak current target, to keep output voltage ripple low. Since each pulse shifts V_{OUT} up, a pause time happens until V_{OUT} trips the internal V_{OUT_Low} threshold again and the next pulse takes place.

The switching frequency in PSM (one phase operation) calculates as:

$$f_{SW(PSM)} = \frac{2 \cdot I_{OUT} \cdot V_{OUT} (V_{IN} - V_{OUT})}{L \cdot I_{PEAK}^2 \cdot V_{IN}} \quad (1)$$

7.4.3 Minimum Duty Cycle and 100% Mode Operation

The minimum on-time, which is typically 70ns, normally determines a limit on the minimum operating duty cycle. The calculation is:

$$DC_{min} = 70ns \cdot 100\% \cdot f_{SW}[Hz] \quad (2)$$

However, a frequency foldback lowers the switching frequency depending on the duty cycle and ensures proper regulation for every duty cycle.

版权 © 2017–2018, Texas Instruments Incorporated

Device Functional Modes (接下页)

There is no limit towards maximum duty cycle. When the input voltage becomes close to the output voltage, the device enters automatically 100% duty cycle mode and both high-side FETs switch on as long as VOUT remains below the regulation setpoint. In this case, the voltage drop across the high-side FETs and the inductors determines the output voltage level. An estimate for the minimum input voltage to maintain output voltage regulation is:

$$V_{IN(min)} = V_{OUT(min)} + I_{OUT}\left[\frac{R_{DS(ON)}}{2} + 13.5m\Omega\right] \quad (3)$$

Where the maximum DCR of the inductors is 27mΩ.

In 100% duty cycle mode, the low-side FETs are switched off. The typical quiescent current in 100% mode is 3.5 mA.

7.4.4 Phase Shifted Operation

Using an inherent benefit of the two-phase conversion, the two phases of TPSM82480 run out of phase. For every switching cycle, the second phase is not allowed to turn on its high-side FET until the master phase has reached its peak current value. This limits the input RMS current and corresponding switching noise.

7.4.5 Phase Add/Shed and Current Balancing

When the load current is below the internal threshold, only the master phase operates. The second phase activates, if the load current exceeds the threshold of typically 1.7 A. The second phase powers off with a hysteresis of about 0.5 A, when the load current decreases.

7.4.6 Current Limit and Short Circuit Protection

Each phase has a separate integrated peak current limit. The dc values are specified in the *Electrical Characteristics*. While its minimum value limits the output current of the phase, the maximum number gives the current that must be considered to flow in some operating case (e.g. overload). At the peak current limit, the device provides its maximum output current.

However, if the current limit situation remains for 512 consecutive switching cycles, the peak current folds back to about 1/3 of the regular limit. This limits the output power for over current and short circuit events. The foldback current limit is released to the normal one only if the load current has decreased as far as needed to undercut the (foldback) peak current limit.

版权 © 2017–2018, Texas Instruments Incorporated

8 Application and Implementation

注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

8.1 Application Information

The TPSM82480 is a switched mode step-down converter module, able to convert a 2.4-V to 5.5-V input voltage into a lower 0.6-V to 5.5-V output voltage, providing up to 6 A continuous output current. It needs a minimum amount of external components. Apart from the output and input capacitors, additional resistors or capacitors are only needed to enable features like soft start, adjustable and selectable output voltage as well as Power Good and/or Thermal Good.

8.2 Typical Application

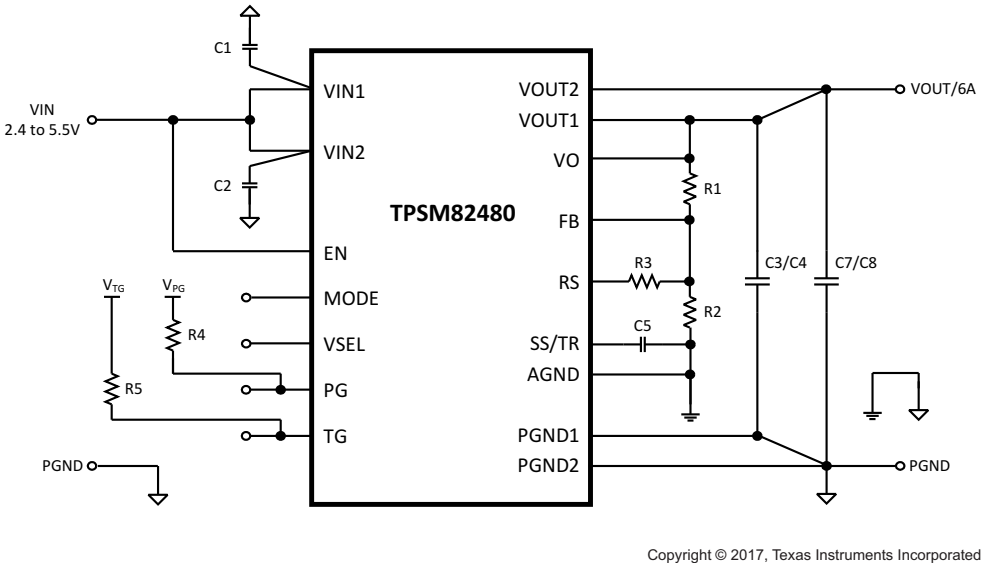


图 7. Typical Application using TPSM82480 for a 6A Point-Of-Load Power Supply

8.2.1 Design Requirements

The following design guideline provides a range for the component selection to operate within the recommended operating conditions. 表 1 shows the components selection that was used for the measurements shown in the *Application Curves*.

版权 © 2017–2018, Texas Instruments Incorporated

Typical Application (接下页)

表 1. List of Components

REFERENCE	DESCRIPTION	MANUFACTURER
Power Module	5.5-V, 6-A step-down module with integrated inductor	TPSM82480MOP, Texas Instruments
C1, C2	2x22-µF, 10-V, ceramic, 0603, X5R	GRM188R61A226ME15#, muRata
C3, C4, C7, C8	4x22-µF, 25-V, ceramic, 0805, X5R	GRM21BR61E226ME44L, muRata
C5	3300-pF, 10-V, ceramic, 0402	Standard
R1, R2, R3	Depending on Vout1 and Vout2, chip, 0402, 0.1%	Standard
R4, R5	470-kΩ, chip, 0603, 1/16-W, 1%	Standard

8.2.2 Detailed Design Procedure

8.2.2.1 Setting the Adjustable Output Voltage

While the device regulates the FB voltage to 0.6V, the output voltage is specified from 0.6 to 5.5 V. A resistive divider (from VOUT to FB to AGND) sets the actual output voltage of the TPSM82480. 公式 4 and 公式 5 are calculating the values of the resistors. First, determining the current through the resistive divider leads to the total resistance (R_1 + R_2). A minimum divider current of about 5 µA is recommended and can be higher if needed.

$$R_1 + R_2 = \frac{V_{OUT}}{I_{FB}} \tag{4}$$

$$R_2 = \frac{V_{REF}}{V_{OUT}}(R_1 + R_2) \tag{5}$$

8.2.2.2 Setting V_{OUT2} Using the VSEL Feature

A V_{OUT} level, different as set with R_1 and R_2 (see *Setting the Adjustable Output Voltage*), can be forced by connecting R_3 between FB and RS pins and pulling VSEL High. R_3 is calculated using 公式 6.

$$R_3 = \frac{V_1 \cdot R_1 \cdot R_2^2}{(V_2 - V_1) \cdot (R_1 \cdot R_2 + R_2^2)} \quad \text{for} \quad (V_2 > V_1) \tag{6}$$

where:

V_1 is the lower level output voltage and

V_2 the higher level output voltage.

8.2.2.3 Output Capacitor Selection

The recommended minimum output capacitance is 4 x 22 µF, that can be ceramic capacitors exclusively. A larger value of C_{OUT} might be needed for V_{OUT} ≤ 1.8V, to improve transient response performance, as well as for V_{OUT} > 3.3 V to compensate for voltage bias effects of the ceramic capacitors. The usage of an additional feed forward capacitor can help reducing amount of output capacitance that is needed to achieve a certain transient response target (see 表 3).

The TPSM82480 provides a wide output voltage range of 0.6 V to 5.5 V. While stability is a critical criteria for the output filter selection, the output capacitor value also determines transient response behavior, ripple and accuracy of V_{OUT}. The internal compensation is designed for an output capacitance range from about 50 µF to 150 µF effectively. Since ceramic capacitors are used preferably, this translates into nominal values of 4 x 22 µF to 4 x 47 µF and mainly depends on the output voltage. The following values are recommended:

版权 © 2017–2018, Texas Instruments Incorporated

表 2. Recommended Output Capacitor Values (nominal)

	$V_{OUT} \le 1.0V$	$1.0V \le V_{OUT} \le 3.3V$	$V_{OUT} \ge 3.3V$
2x22µF			
4x22µF		√	
4x47µF	√	√	√
6x47µF			

Beyond the recommendations in 表 2, other values can be chosen and might be suitable depending on VOUT and actual effective capacitance. In such case, stability needs to be checked within the actual environment.

Even if the output capacitance is sufficient for stability, a different value might be desirable to improve the transient response behavior. 表 3 can be used to determine capacitor values for specific transient response targets:

表 3. Recommended Output Capacitor Values (nominal)

Output Voltage [V]	Load Step [A]	Output Capacitor Value(1)	Feedforward Capacitor(1)	Typical Transient Response Accuracy	
				±mV	±%
1.0	0 - 3	4 x 47µF	-	50	5
	3 - 6			50	5
1.8	0 - 3	4 x 22µF	36pF	50	3
	3 - 6			50	3
2.5	0 - 3	4 x 22µF	36pF	62	2.5
	3 - 6			50	2
3.3	0 - 3	4 x 47µF	36pF	100	3
	3 - 6			80	2.5

(1) The values in the table are nominal values. The effective capacitance can differ significantly, depending on package size, voltage rating and dielectric material.

The architecture of the TPSM82480 allows the use of tiny ceramic output capacitors with low equivalent series resistance (ESR). These capacitors provide low output voltage ripple and are recommended. To keep its low resistance up to high frequencies and to get narrow capacitance variation with temperature, it is recommended to use X5R or X7R dielectrics. Using even higher values than demanded for stability and transient response has further advantages like smaller voltage ripple and tighter dc output accuracy in Power Save Mode.

8.2.2.4 Input Capacitor Selection

The input current of a buck converter is pulsating. Therefore, a low ESR input capacitor is required to prevent large voltage transients at the source but still providing peak currents to the device. The recommended Capacitance value for most applications is 2 x 10 µF, split between the VIN1 and VIN2 inputs and placed as close as possible to these pins and PGND pins. If additional capacitance is needed, it can be added as bulk capacitance. To ensure proper operation, the effective capacitance at the VIN pins must not fall below 2 x 5 µF.

Low ESR multilayer ceramic capacitors are recommended for best filtering. Increasing with input voltage, the dc bias effect reduces the nominal capacitance value significantly. To decrease input ripple current further, larger values of input capacitors can be used.

8.2.2.5 Soft Start Capacitor Selection

The soft start ramp time can be set externally connecting a capacitor between the SS/TR and AGND pins. The capacitor value C_{SS} that is needed to get a specific rising time Δt_{SS} calculates as:

$$C_{SS} = \Delta t_{SS} \cdot \frac{5.25\mu A}{0.6V} \quad (7)$$

版权 © 2017–2018, Texas Instruments Incorporated

Since the device has an internal delay time Δt_{DELAY} from EN=High to start switching, the overall startup time is longer as shown in 图 8.

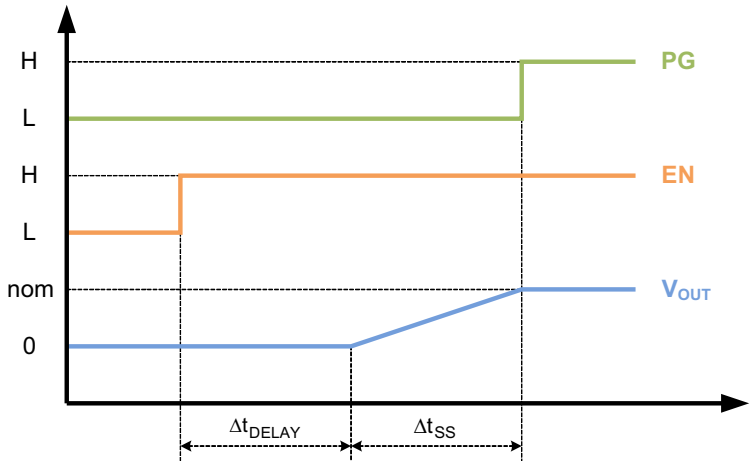


图 8. Soft Start Δt_{SS}


If very large output capacitances are used (e.g. >4x47µF), the use of a soft start capacitor is mandatory to avoid current limit foldback during startup (see Current Limit and Short Circuit Protection).

8.2.2.6 Tracking

For values up to 0.6V, an external voltage, connected to the SS/TR pin, drives the voltage level at the FB pin. In doing so, the voltage at the FB pin is directly proportional to the voltage at the SS/TR pin.

When choosing the resistive divider proportion according to 公式 8, V_{OUT} tracks V_{TR} simultaneously.

$$\frac{R_1}{R_2} = \frac{R_3}{R_4} \tag{8}$$

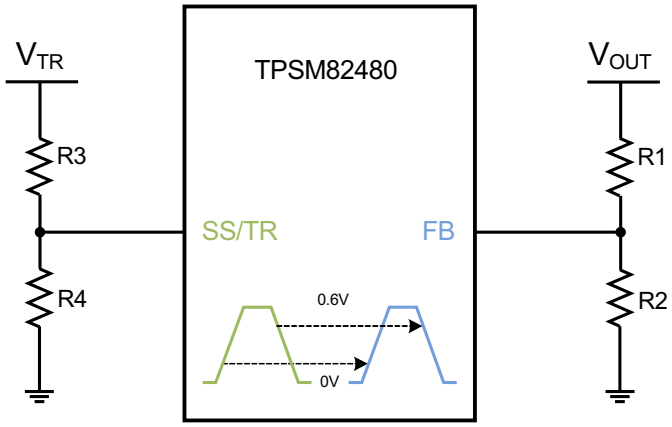

Copyright © 2017, Texas Instruments Incorporated

图 9. Voltage Tracking

Following the example of *Setting the Adjustable Output Voltage* with V_{OUT} = 1.8 V, R_1 = 240 kΩ and R_2 = 120 kΩ, 公式 9 and 公式 10 calculate R3 and R4, connected to the SS/TR pin. Different to the resistive divider at the FB pin, a larger current must be chosen, to avoid a tracking offset caused by the 5.25 µA current that flows out of the SS/TR pin. Assuming a 250 µA current, R_4 calculates as follows:

$$R_4 = \frac{0.6V}{250\mu A} = 2.4k\Omega \tag{9}$$

R_3 calculates now rearranging 公式 8:

$$R_3 = R_4 \cdot \frac{R_1}{R_2} = 2.4k\Omega \cdot \frac{240k\Omega}{120k\Omega} = 4.8k\Omega \tag{10}$$

However, the following limitations can influence the tracking accuracy:

- The upper limit of the SS/TR voltage that can be tracked is about 0.6V. Since it is detected internally by a comparator, process variation and ramp speed can cause up to ±30 mV different threshold.
- In case that the voltage at SS/TR ramps up immediately when VIN is supplied or EN is set High, the internal startup delay, Δt_{DELAY}, delays the ramp of V_{OUT}. The internal ramp starts after Δt_{DELAY} at the voltage level, which is actually present at the SS/TR pin.
- The tracking down speed is limited by the RC time constant of the internal output discharge (always connected when tracking down) and the actual load with the output capacitance. Note: The device tracks down with the same behavior for MODE High (Forced PWM) and Low (Auto PSM).

8.2.2.7 Thermal Good


The Thermal Good pin provides an open drain output. The logic level is given by the pull up source which can be VOUT. In this case, TG goes or stays Low, when the device switches off due to EN, UVLO or Thermal Shutdown.

When using an independent source for the pull up logic, the logic behavior at shutdown differs, because the TG pin internally goes high impedance. As before, TG goes Low when TG threshold is reached, but goes back High in the event of being switched off (e.g. Thermal Shutdown).

版权 © 2017–2018, Texas Instruments Incorporated


8.2.3 Application Curves

V_{IN}= 3.6 V, V_{OUT} = 1.8V (R1 / R2 = 240 kΩ / 120 kΩ), T_A = 25°C, (unless otherwise noted)

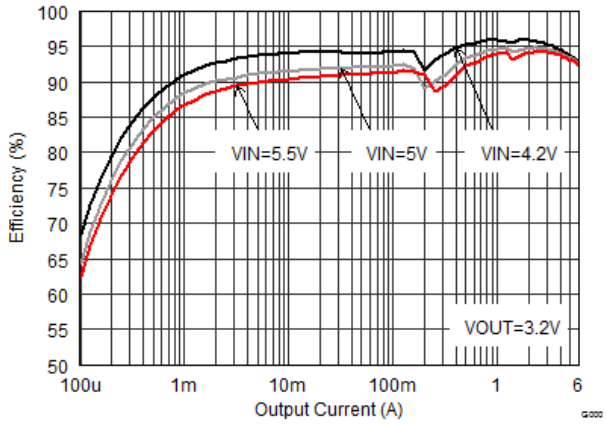


V_{OUT} = 3.2 V

图 10. Efficiency vs Output Current

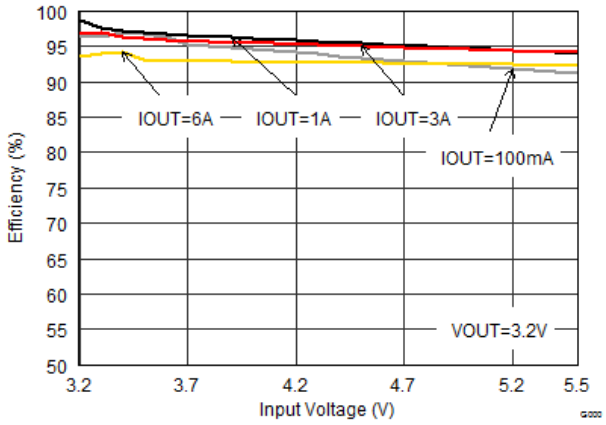


V_{OUT} = 3.2 V

图 11. Efficiency vs Input Voltage

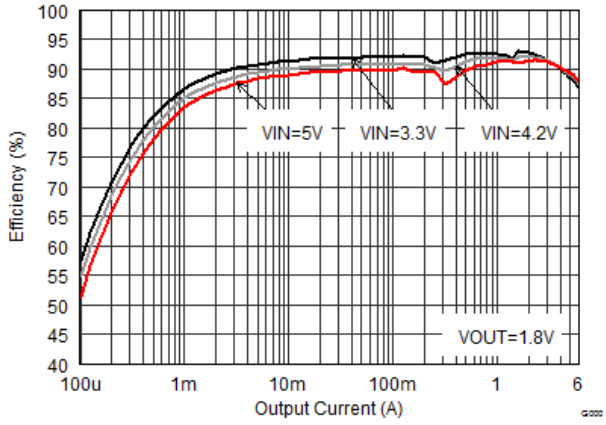


V_{OUT} = 1.8 V

图 12. Efficiency vs Output Current

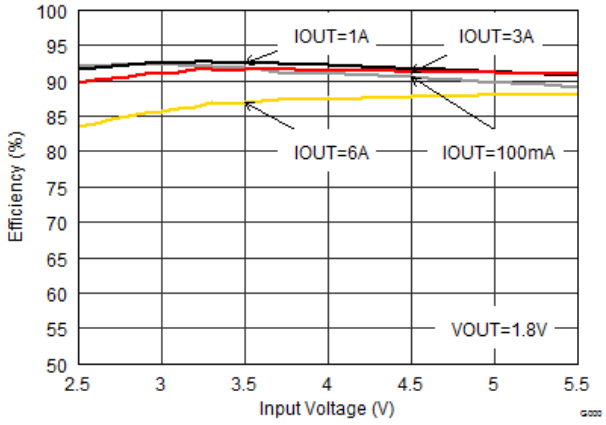


V_{OUT} = 1.8 V

图 13. Efficiency vs Output Voltage

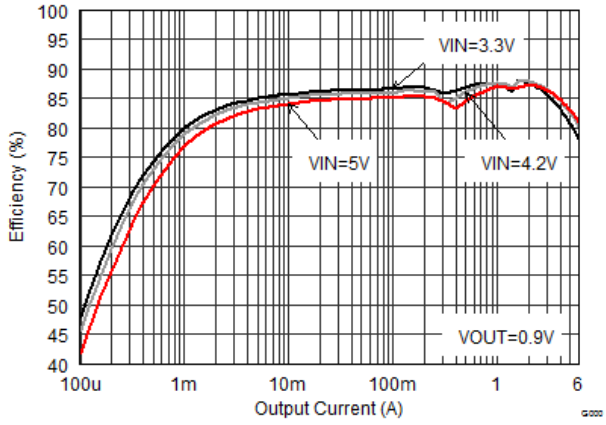

V_{OUT} = 0.9 V

图 14. Efficiency vs Output Current

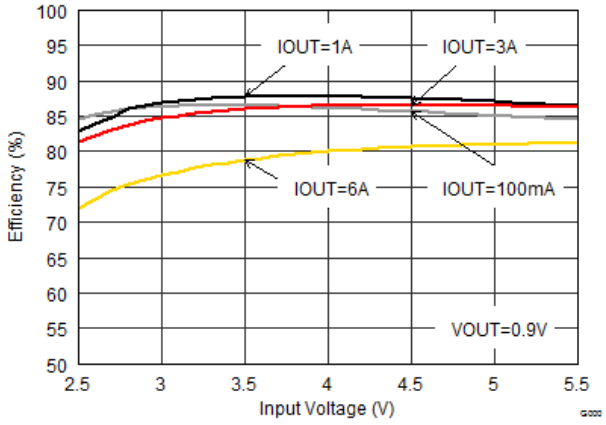

V_{OUT} = 0.9 V

图 15. Efficiency vs Input Voltage

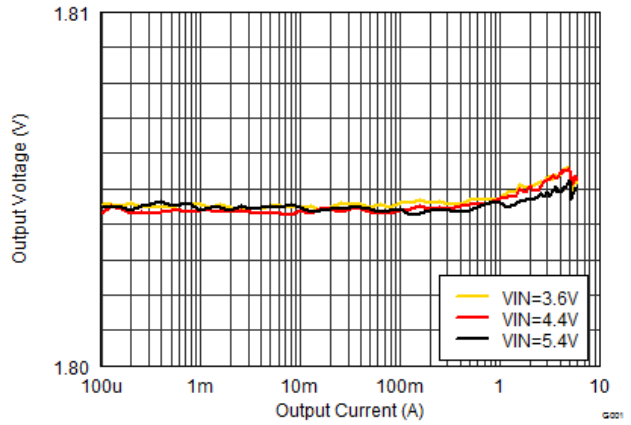


图 16. Output Voltage vs Output Current (Load Regulation)



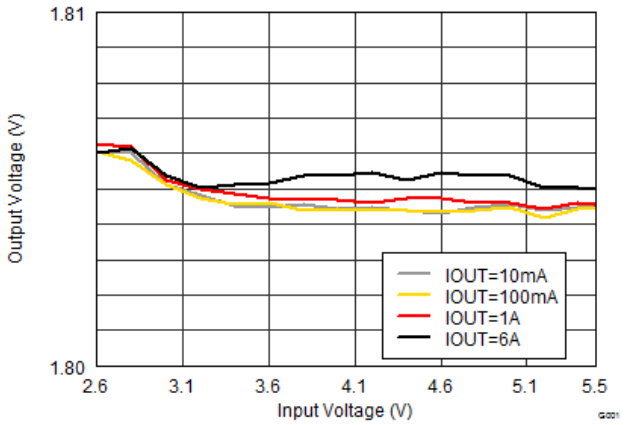


图 17. Output Voltage vs Input Voltage (Line Regulation)

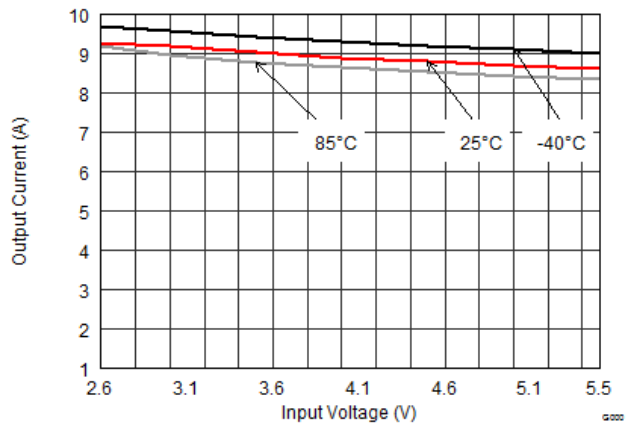


V_{OUT} = 0.6 V

图 18. Maximum Output Current

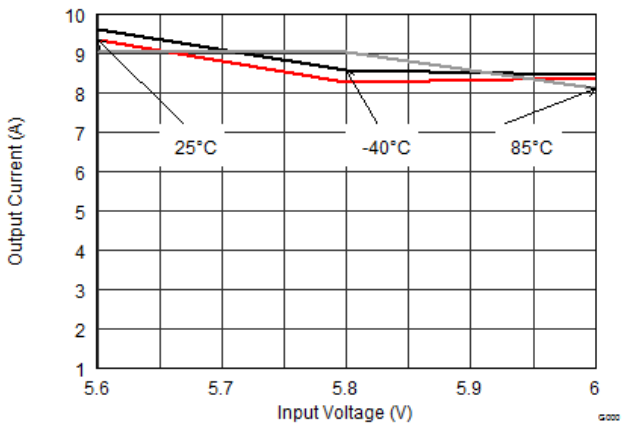


V_{OUT} = 5.5 V

图 19. Maximum Output Current

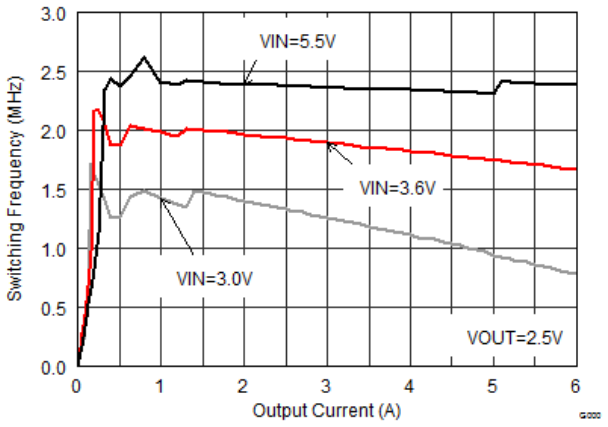

V_{OUT} = 2.5 V


图 20. Switching Frequency vs Output Current

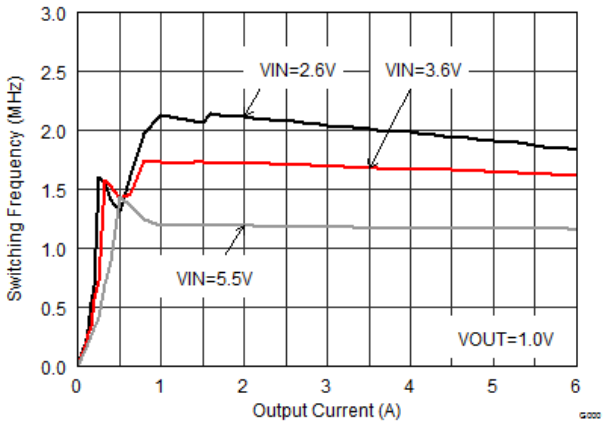

V_{OUT} = 1 V


图 21. Switching Frequency vs Output Current

版权 © 2017–2018, Texas Instruments Incorporated

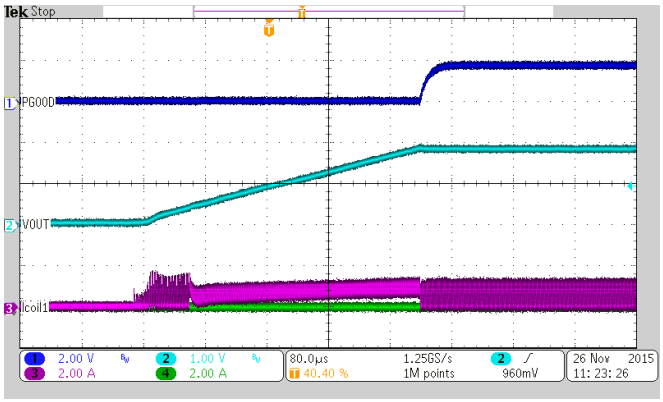


V_{OUT} = 1.8 V

图 22. Startup into 3.3 Ω resistor

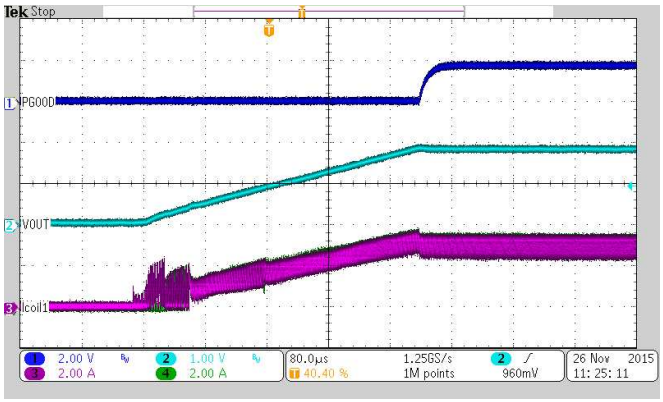


V_{OUT} = 1.8 V

图 23. Startup into 0.3 Ω resistor

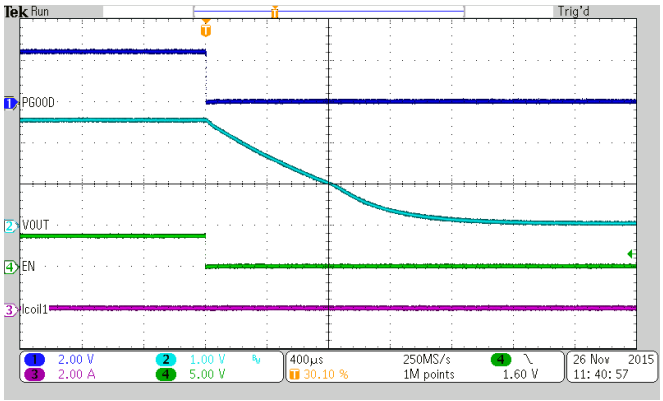

V_{OUT} = 2.5 V　　no load

图 24. Output Discharge

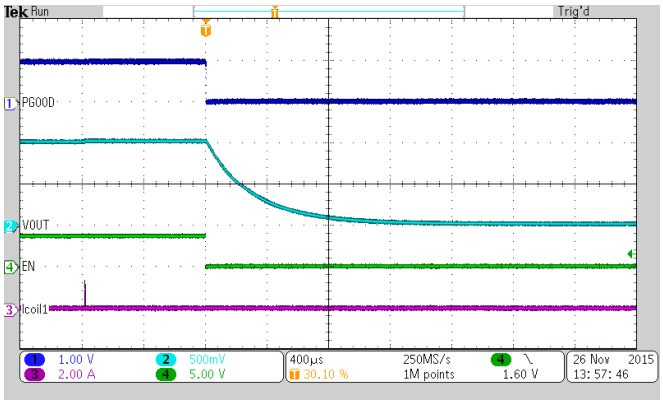

V_{OUT} = 1 V　　no load

图 25. Output Discharge


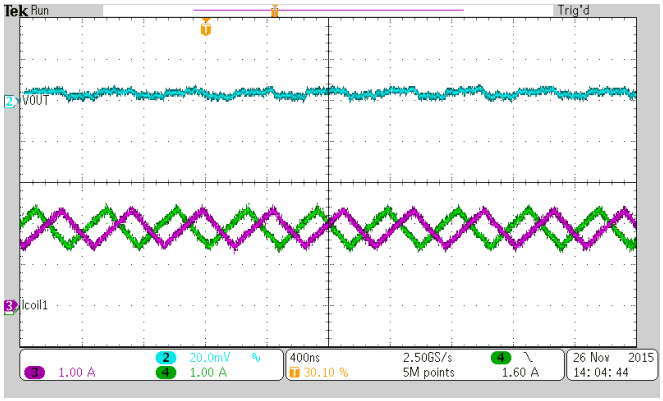


图 26. Typical Operation PWM

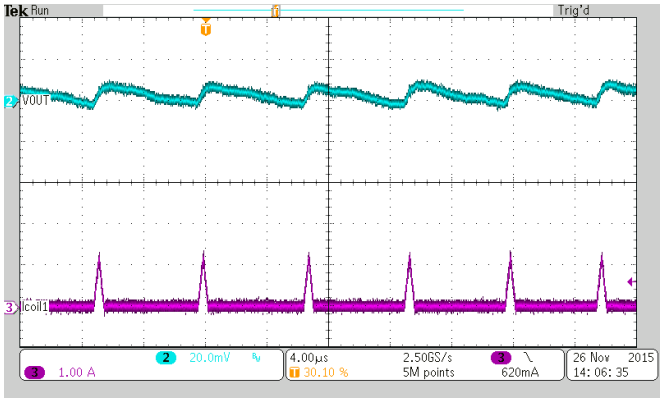

I_{OUT} = 50 mA

图 27. Typical Operation PSM

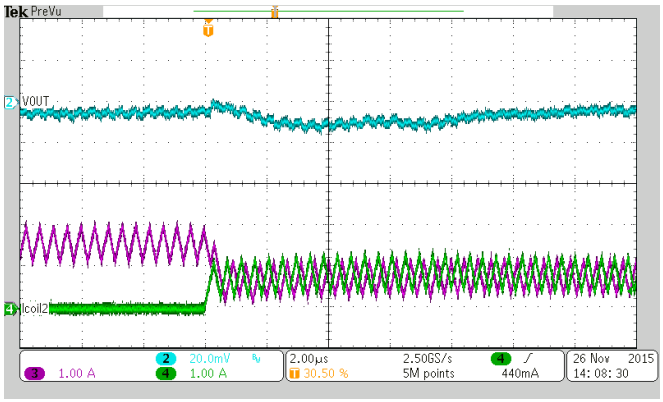


图 28. Adding 2nd Phase

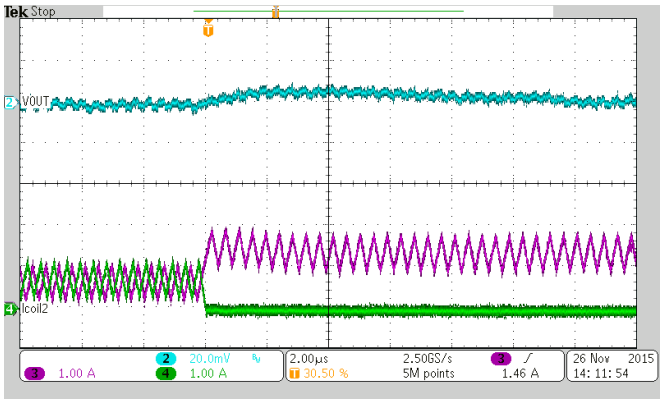


图 29. Shedding 2nd Phase


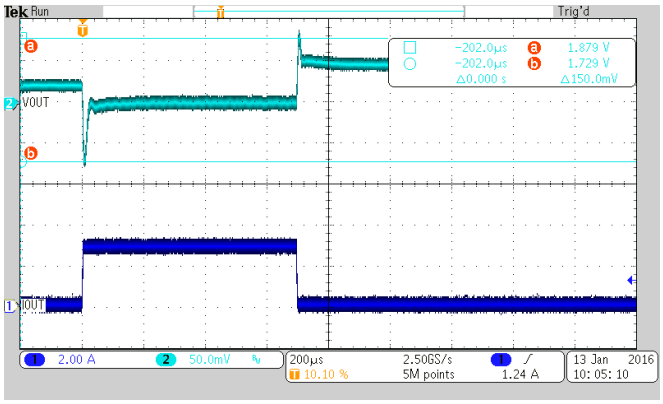


图 30. Load Transient Response (PSM-PWM), Load Step 0 to 3 A

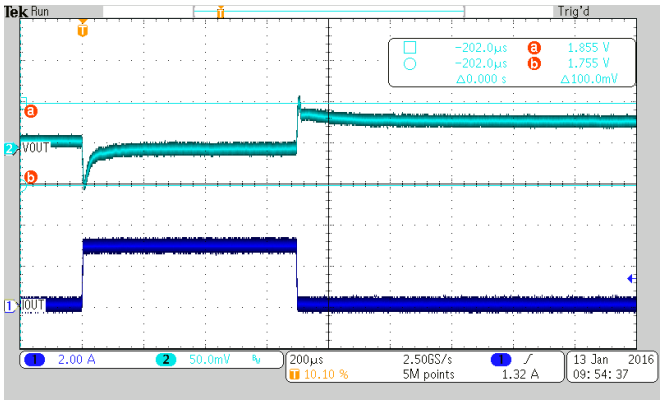

C_{ff} = 36 pF (nom)

图 31. Load Transient Response (PSM-PWM), Load Step 0 to 3 A


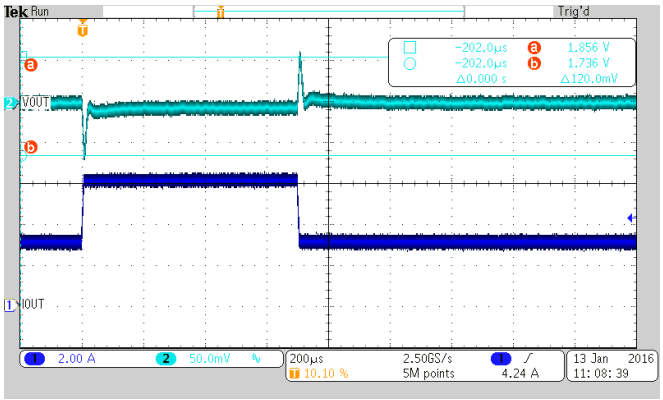



图 32. Load Transient Response (PWM-PWM), Load Step 3 to 6 A

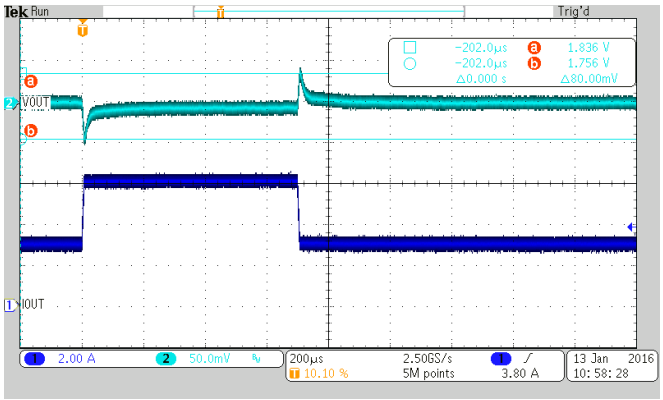

C_{ff} = 36 pF (nom)


图 33. Load Transient Response (PWM-PWM), Load Step 3 to 6 A

版权 © 2017–2018, Texas Instruments Incorporated

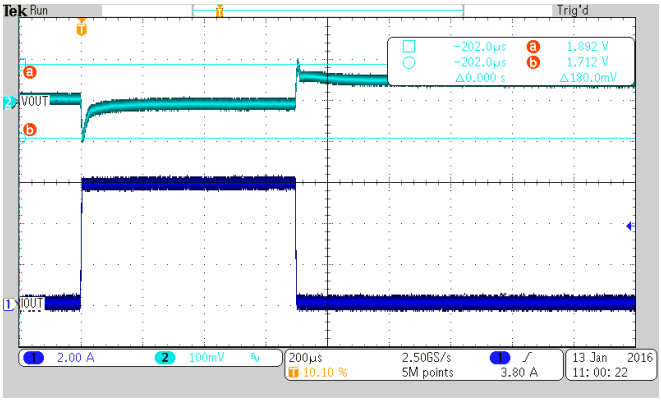


C_{ff} = 36 pF (nom)

图 34. Load Transient Response (PWM-PWM), Load Step 0 to 6 A

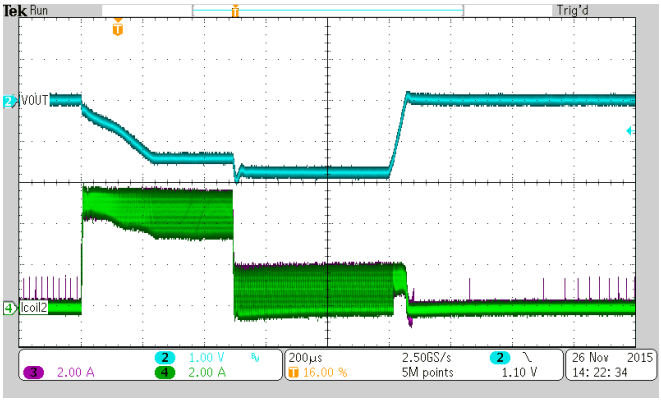


I_{OUT} = 10 A

图 35. Current Limit Fold-Back at Overload

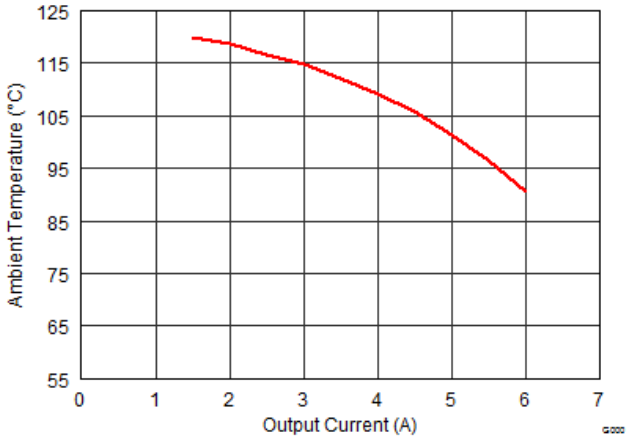

V_{IN} = 5 V V_{OUT} = 3.3 V

图 36. Maximum Ambient Temperature for T_J=125°C (TPSM82480 EVM)

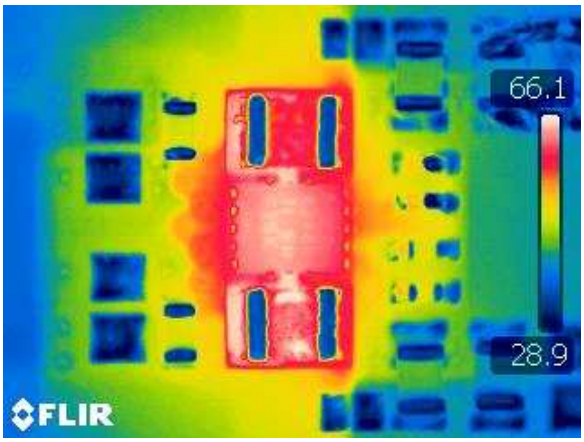

V_{IN} = 5 V V_{OUT} = 3.3 V I_{OUT} = 6 A

图 37. Device Temperature (TPSM82480 EVM)

8.3 System Examples

This section provides typical schematics for commonly used output voltage values.

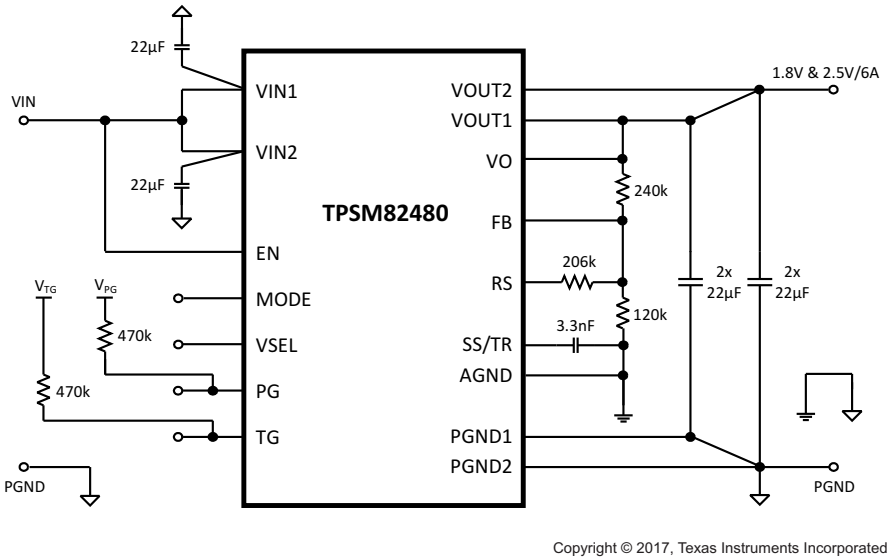


图 38. A typical 1.8 V & 2.5 V, 6 A Power Supply

表 4. Resistive Divider Values for different Combinations of V_{OUT}

OUTPUT VOLTAGE	R1	R2	R3
2.5V and 3.3V	380kΩ	120kΩ	285kΩ
1.2V and 1.8V	120kΩ	120kΩ	120kΩ
0.9V and 1.0V	60kΩ	120kΩ	360kΩ

9 Power Supply Recommendations

The TPSM82480 is designed to operate from a 2.4-V to 5.5-V input voltage supply. The input power supply's output current needs to be rated according to the output voltage and the output current of the power rail application.

版权 © 2017–2018, Texas Instruments Incorporated

10 Layout

10.1 Layout Guidelines

A recommended PCB layout for the TPSM82480 dual phase solution is shown below. It ensures best electrical and optimized thermal performance considering the following important topics:

- Both V_{OUT1} and V_{OUT2} must be connected to build a common VOUT structure.

- The input capacitors must be placed as close as possible to the appropriate pins of the device. This provides low resistive and inductive paths for the high di/dt input current. The input capacitance is split, as is the V_{IN} connection, to avoid interference between the input lines.

- The V_{OUT} regulation loop is closed with C_{OUT} and its ground connection. To avoid PGND noise crosstalk, PGND is kept split for the regulation loop. If a ground layer or plane is used, a direct connection by vias, as shown, is recommended. Otherwise the connection of C_{OUT} to GND must be short for good load regulation.

- The FB node is sensitive to dv/dt signals. Therefore the resistive divider should be placed close to the FB (and RS pin in case of using R_3) pin, avoiding long trace distance.

For more detailed information about the actual EVM solution, see SLVUAI6.

10.2 Layout Example

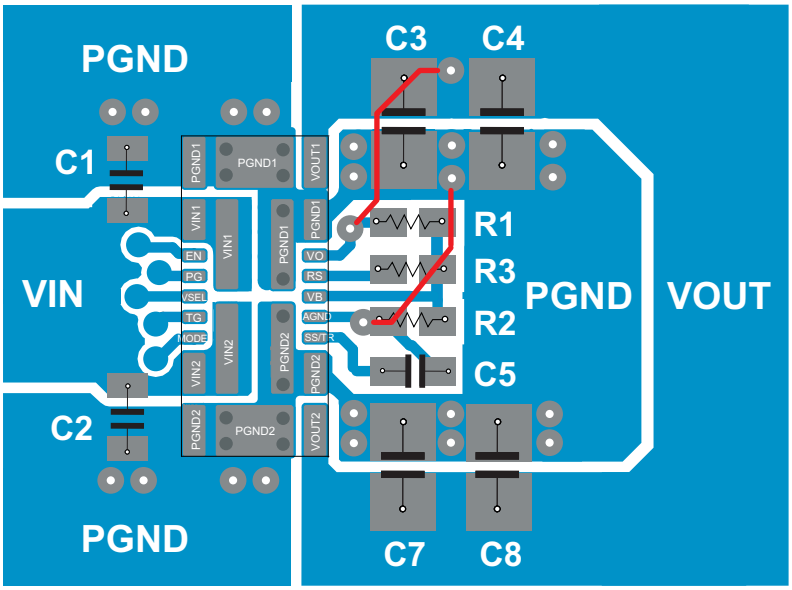


图 39. TPSM82480 Board Layout

11 器件和文档支持

11.1 文档支持

11.1.1 相关文档

如需相关文档，请参阅：

- 《*TPSM82480EVM-BSR002 评估模块用户指南*》，SLVUB57

11.2 接收文档更新通知

要接收文档更新通知，请导航至 TI.com.cn 上的器件产品文件夹。请单击右上角的*提醒我* 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

11.3 社区资源

下列链接提供到 TI 社区资源的连接。链接的内容由各个分销商“按照原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的 《使用条款》。

TI E2E™ 在线社区 ***TI 的工程师对工程师 (E2E) 社区。*** **此社区的创建目的在于促进工程师之间的协作。在 e2e.ti.com 中，您可以咨询问题、分享知识、拓展思路并与同行工程师一道帮助解决问题。**

设计支持 ***TI 参考设计支持*** **可帮助您快速查找有帮助的 E2E 论坛、设计支持工具以及技术支持的联系信息。**

11.4 商标

E2E is a trademark of Texas Instruments.
All other trademarks are the property of their respective owners.

11.5 静电放电警告



这些装置包含有限的内置 ESD 保护。 存储或装卸时，应将导线一起截短或将装置放置于导电泡棉中，以防止 MOS 门极遭受静电损伤。

11.6 Glossary

SLYZ022 — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

12 机械、封装和可订购信息

以下页面包含机械、封装和可订购信息。这些信息是指定器件的最新可用数据。数据如有变更，恕不另行通知，也不会对此文档进行修订。如欲获取此数据表的浏览器版本，请参阅左侧的导航。

版权 © 2017–2018, Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TPSM82480MOPR	Active	Production	QFM (MOP) | 24	3000 | LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	82480
TPSM82480MOPR.A	Active	Production	QFM (MOP) | 24	3000 | LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	82480
TPSM82480MOPT	Active	Production	QFM (MOP) | 24	250 | SMALL T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	82480
TPSM82480MOPT.A	Active	Production	QFM (MOP) | 24	250 | SMALL T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	82480

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.


(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.


Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

MOP0024A






PACKAGE OUTLINE

QFM - 1.55 mm max height

QUAD FLAT MODULE

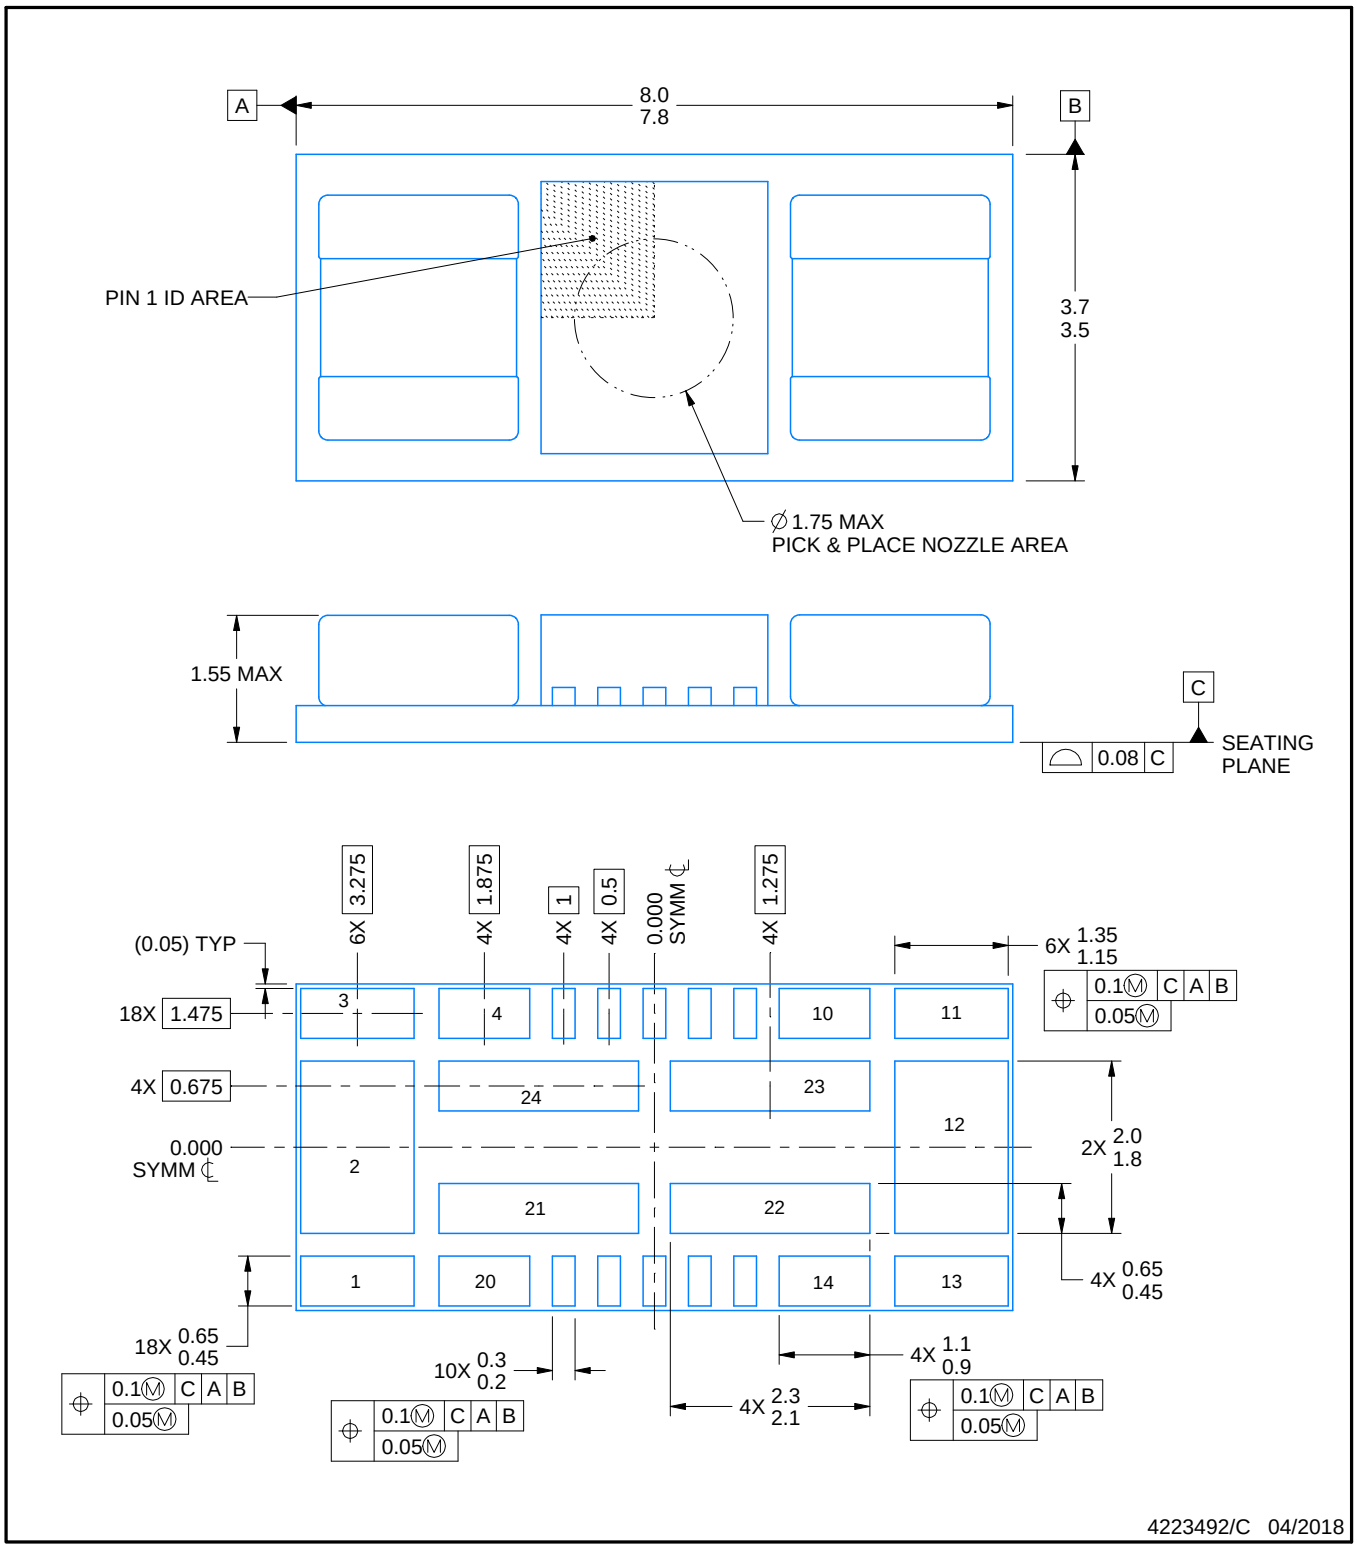

4223492/C 04/2018

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

EXAMPLE BOARD LAYOUT


MOP0024A

QFM - 1.55 mm max height

QUAD FLAT MODULE

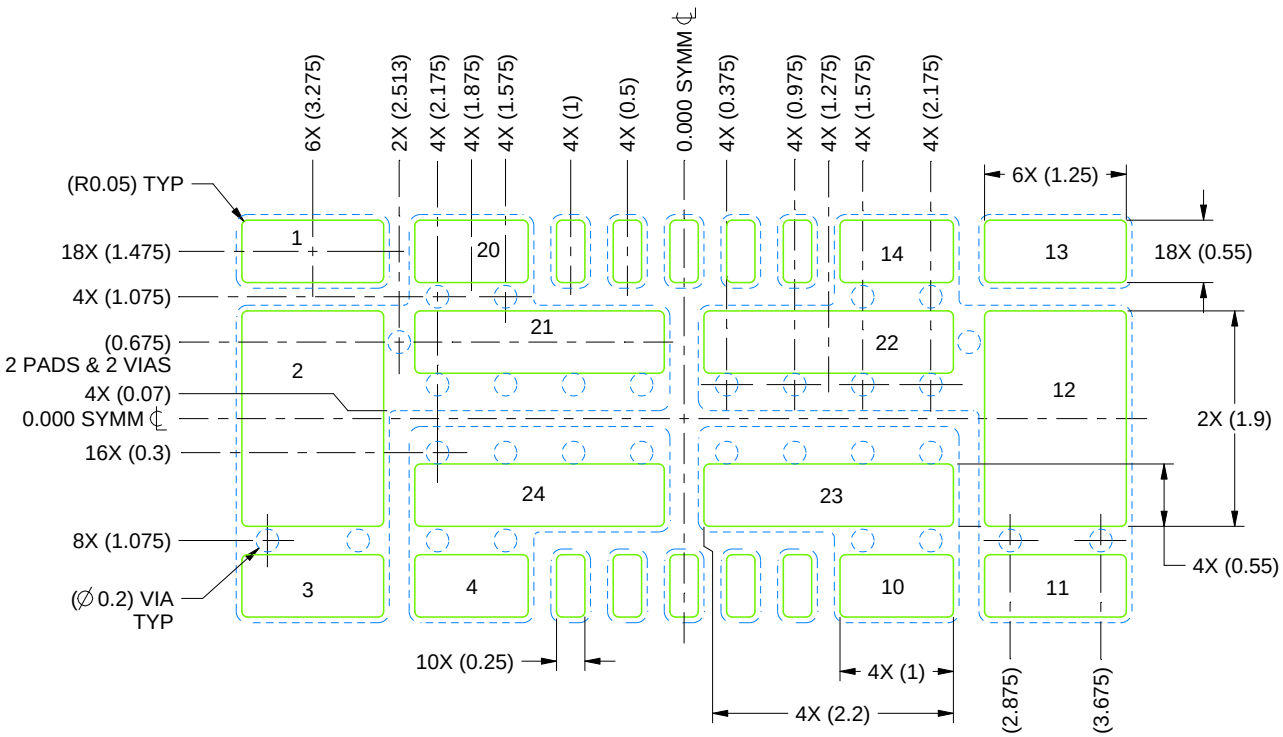

LAND PATTERN EXAMPLE
SOLDER MASK DEFINED
SCALE:15X

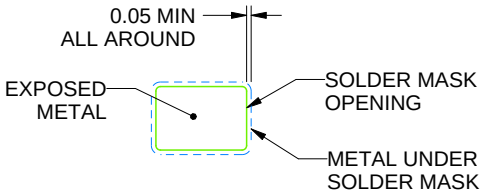

PAD DETAIL
TYPICAL

4223492/C 04/2018

NOTES: (continued)


3. This package is designed to be soldered to thermal pads on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
4. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view.

EXAMPLE STENCIL DESIGN

MOP0024A

QFM - 1.55 mm max height

QUAD FLAT MODULE

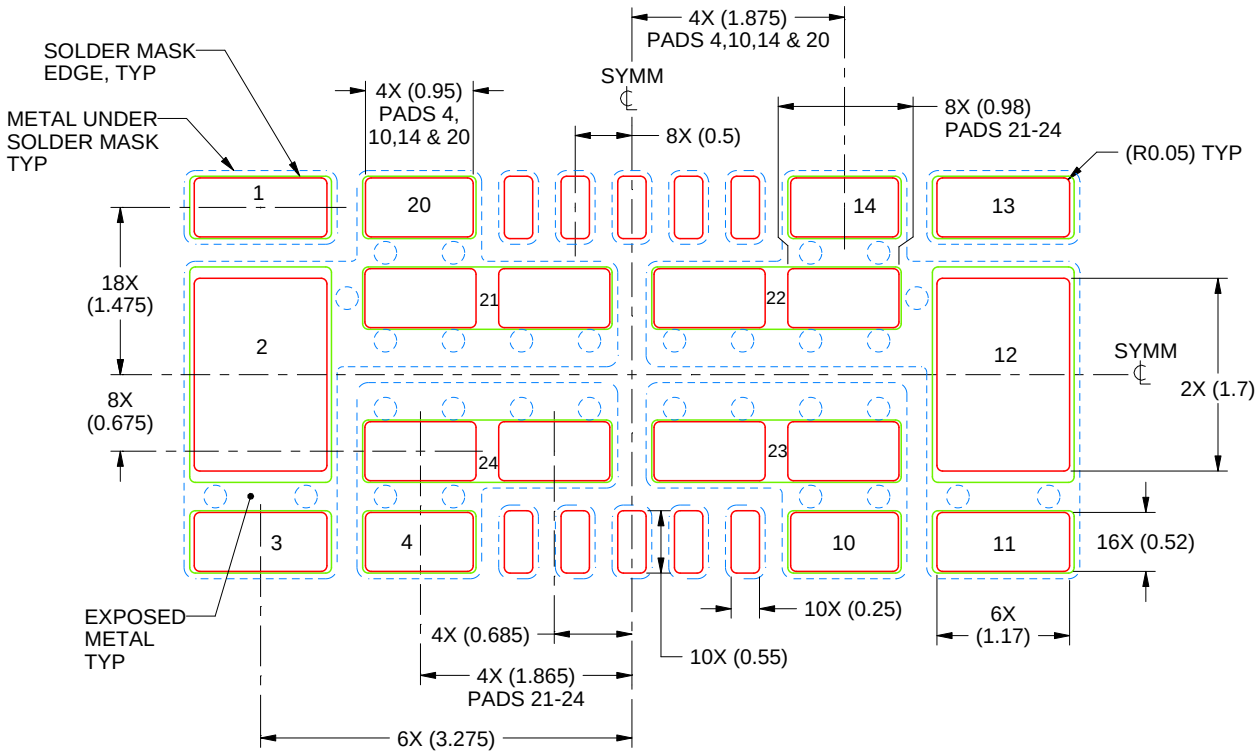

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL

PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE
PADS 1, 3, 11 & 13: 88%
PADS 4, 10, 14 & 20: 90%
PADS 2, 12 & 21-24: 84%
SCALE:15X

4223492/C 04/2018

NOTES: (continued)

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做出任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 TI 销售条款)、TI 通用质量指南 或 ti.com 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。 除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2026，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月