
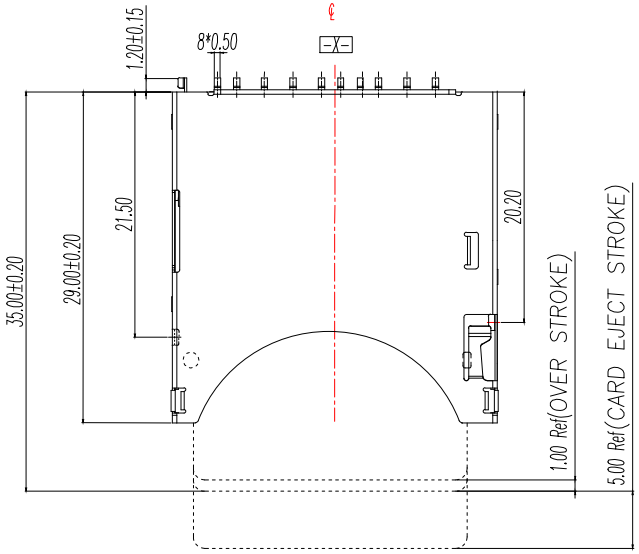




MATERIAL:

Insulator: High Temperature Thermoplastic,UL 94V-0.

Contact: Copper Alloy

Electrical:

Current Rating :0.5mA AC/DC max.

Voltage Rating :12V AC/DC

Ambient Temperature Range :-20°C~+60°C

Storage Temperature Range :-40°C~+85°C

Ambient Humidity Range :95% R.H. Max.


Contact Resistance:100mΩmax.


Insulation Resistance:1000MΩmin./500VDC


Mating Cycles:5,000 Insertions

Usable Memory Card: SD&MMC Card

CIRCUIT:

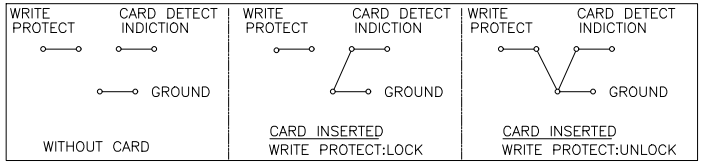

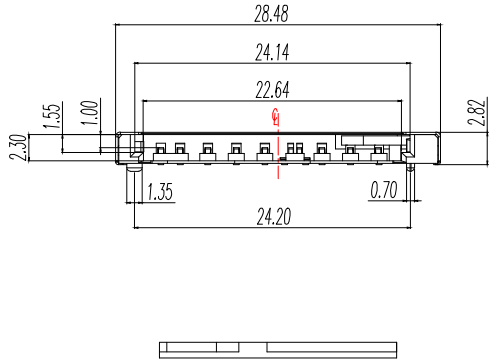


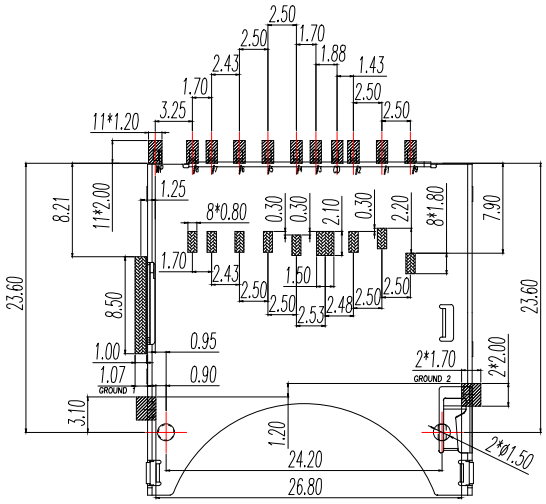

Welding area

Prohibited layout area

Recommend PCB Layout Drawing

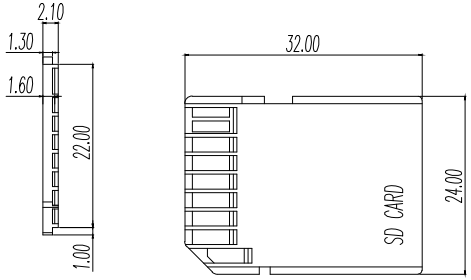


SD CARD PIN DEFINE			
Pin#	Name	Type	Description
1	CD/DAT3	I/O/PP	Card Detelct/ Date Line[Bit3]
2	CMD	PP	Command/Response
3	Vss1	S	Supply voltage ground
4	VDD	S	Supply voltage
5	CLK	I	Clock
6	Vss2	S	Supply voltage ground
7	DAT0	I/O/PP	Date Line [Bit0]
8	DAT1	I/O/PP	Date Line [Bit1]
9	DAT2	I/O/PP	Date Line [Bit2]
10	CD		CARD DETECT
11	WP		WRITE PROTECT

制圖 DRAWN	更改內容 DESCRIPTION	日期 DATE	GENERL TOLERANCE		制圖 DRAWING	EMMA	料号 PART NO.	BX-SD-2.8HJ	版本 REV.	A
			X.±0.35	X.°±5°			品名 TITLE	SD CARD PUSH PUSH 2.8H CONN.	页次 SHEET	1/1
			.X±0.25	.X°±3°	审核 CHECK	EVA	客户料号 CUTM.NO.			
			.XX±0.15		核准 APPROVAL	JADE				
					单位 UNITS	MM	比例 SCALE	1:1		

Bossie（博锡）

THE PACKING FOR SD CARD SERIES PUSH TYPE

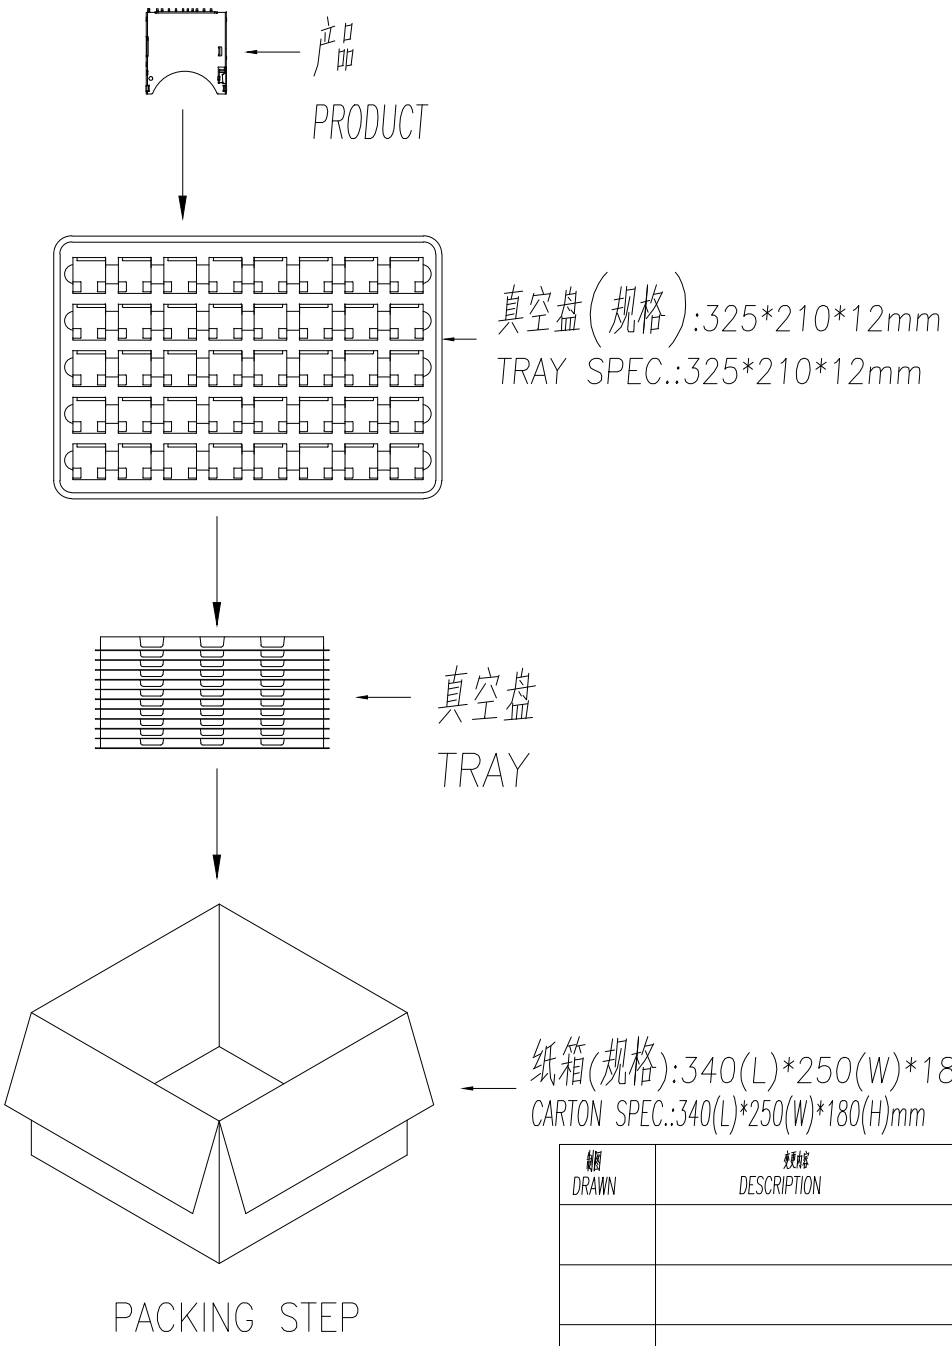

PACKING STEP

注意(Note):

1.将产品一一放入真空盒内，依同一方向摆放

PUT PRODUCT INTO THE TRAY,AND AS SAME DIRECTION

2.产品放置时，如图所示

THE DIRECTION REFERE TO DRAWING

3.每个真空盘装入40pcs产品

QUANTITY OF PER TRAY:40 PCS

4.一个纸箱可放入26个真空盘

QUANTITY OF PER CARTON:26 TRAYS

5.最上面一个真空盘用作上盖，不装入产品

6.若有未装满之尾数箱，必须用缓冲材加满


THE UNFILLING-CARTON MUST BE FILLED WITH ASSUAGEMENT


7.装满产品之纸箱，最大堆积数量为5箱


THE CARTON FULLY FILLED WITH PRODUCTS THE MAX. ACCUMULATING QUATITY IS 5 CARTONS


制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERL TOLERANCE		制图 DRAWING	EMMA	料号 PART NO.	BX-SD-2.8HJ	版本 REV.	A
			X.±0.35	X.°±5°	审核 CHECK	EVA	品名 TITLE	SD CARD PUSH PUSH 2.8H CONN.	页次 SHEET	1/1
			.X±0.25	.X°±3°			客户料号 CUTM.NO.			
			.XX±0.15		核准 APPROVAL	JADE				
					单位 UNITS	MM	比例 SCALE	1:1		


Bossie（博锡）

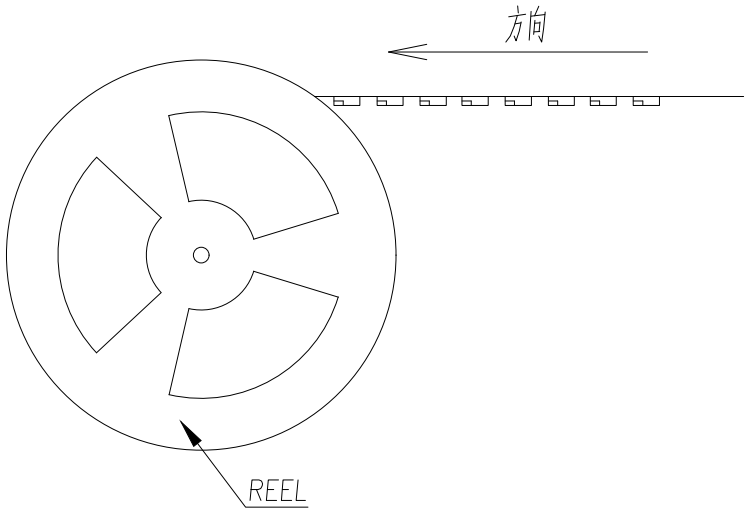


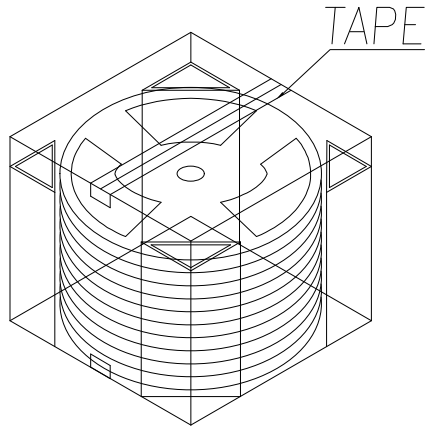


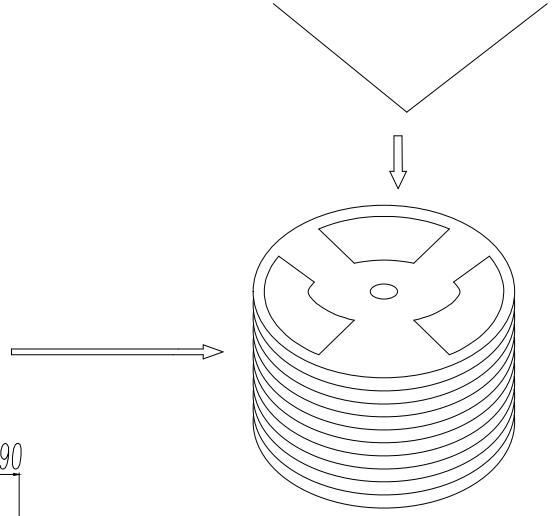

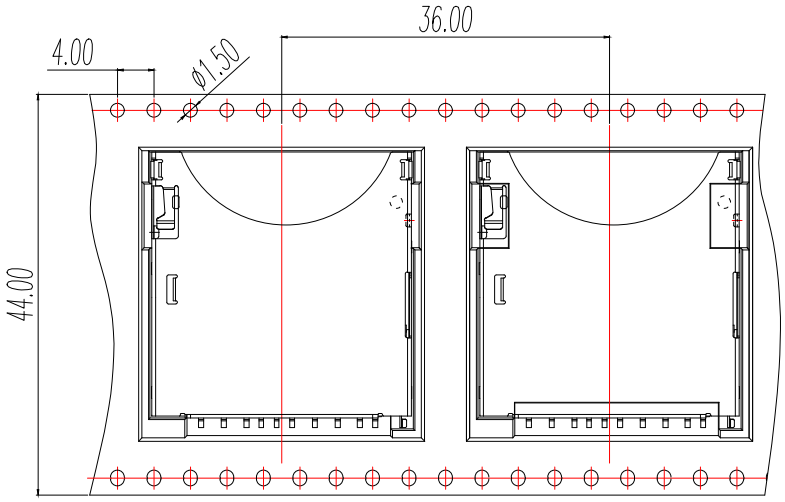



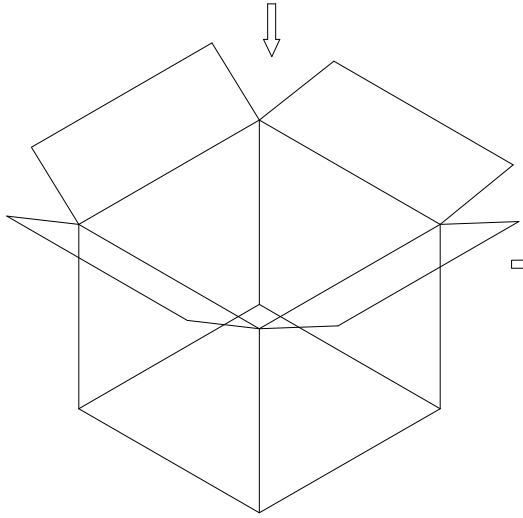

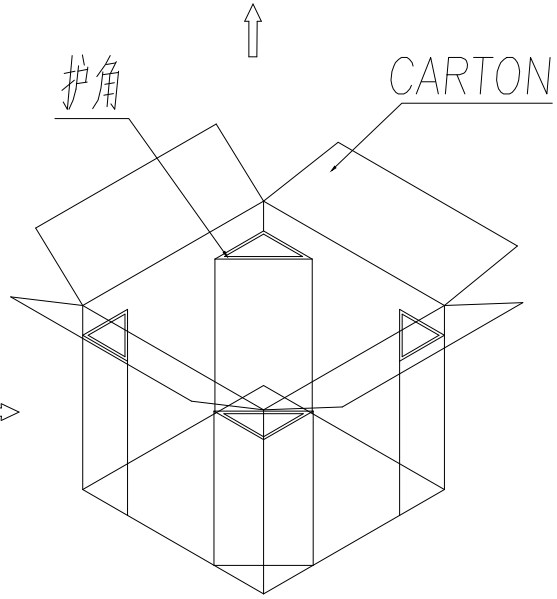

PACKING INFORMATION

PART NAME	
QUANITY OF PER TRAY	400PCS/REEL
QUANITY OF PER CARTON	6*400=2400PCS/CARTON
WEIGHT OF PER TRAY	
WEIGHT OF PER CARTON (NET WEIGHT)	
GROSS WEIGHT	
SIZE	350*350*345

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE

GENERL TOLERANCE	
X.±0.35	X.°±5°
.X±0.25	.X°±3°
.XX±0.15	

制图 DRAWING	EMMA
审核 CHECK	EVA
核准 APPROVAL	JADE
单位 UNITS	MM
比例 SCALE	1:1

料号 PART NO.	BX-SD-2.8HJ	版本 REV.	A
品名 TITLE	SD CARD PUSH PUSH 2.8H CONN. 铁壳脚	页次 SHEET	1/1
客户料号 CUTM.NO.			

Bossie（博锡）