
Description

The SI9942DY-T1-E3 uses advanced trench technology to provide excellent $R_{DS(ON)}$ and low gate charge .

The complementary MOSFETs may be used to form a level shifted high side switch, and for a host of other applications.




General Features

- **N-Channel**
  V_{DS} = 40V,I_D =8.0A
  $R_{DS(ON)}$ < 22mΩ @ V_{GS}=10V
  $R_{DS(ON)}$ < 31mΩ @ V_{GS}=4.5V


- **P-Channel**
  V_{DS} = -40V,I_D = -7.0A
  $R_{DS(ON)}$ < 35mΩ @ V_{GS}=-10V
  $R_{DS(ON)}$ < 48mΩ @ V_{GS}=-4.5V

- High power and current handing capability
- Lead free product is acquired
- Surface mount package

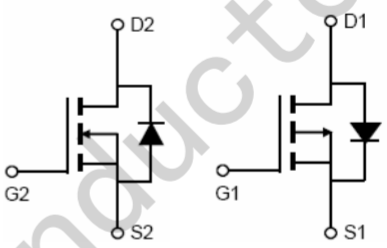

N-channel **P-channel**

Schematic diagram

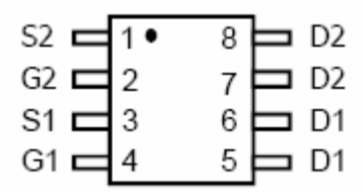

Marking and pin assignment

Absolute Maximum Ratings (T_A=25℃unless otherwise noted)

Parameter		Symbol	N-Channel	P-Channel	Unit
Drain-Source Voltage		V_{DS}	40	-40	V
Gate-Source Voltage		V_{GS}	±20	±20	V
Continuous Drain Current	T_A=25℃	I_D	8.0	-7.0	A
Pulsed Drain Current (Note 1)		I_{DM}	40	-30	A
Maximum Power Dissipation	T_A=25℃	P_D	2.0	2.0	W
Operating Junction and Storage Temperature Range		T_J,T_{STG}	-55 To 150	-55 To 150	℃

Thermal Characteristic

Thermal Resistance,Junction-to-Ambient (Note2)	$R_{\theta JA}$	N-Ch	62.5	℃/W
Thermal Resistance,Junction-to-Ambient (Note2)	$R_{\theta JA}$	P-Ch	62.5	℃/W

JSMICRO Semiconductor

N-CH Electrical Characteristics (T_A=25℃unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	V_{GS}=0V I_D=250μA	40	-	-	V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS}=40V,V_{GS}=0V	-	-	1	μA
Gate-Body Leakage Current	I_{GSS}	V_{GS}=±20V,V_{DS}=0V	-	-	±100	nA
On Characteristics (Note 3)						
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS}=V_{GS},I_D=250μA	1.0	1.4	2.0	V
Drain-Source On-State Resistance	$R_{DS(ON)}$	V_{GS}=10V, I_D=8A V_{GS}=4.5V, I_D=6A	- -	17 21	22 31	mΩ mΩ
Forward Transconductance	g_{FS}	V_{DS}=5V,I_D=8A	15	-	-	S
Dynamic Characteristics (Note4)						
Input Capacitance	C_{lss}	V_{DS}=20V,V_{GS}=0V, F=1.0MHz	-	415	-	PF
Output Capacitance	C_{oss}		-	112	-	PF
Reverse Transfer Capacitance	C_{rss}		-	11	-	PF
Switching Characteristics (Note 4)						
Turn-on Delay Time	$t_{d(on)}$	V_{DD}=20V, R_L=2.5Ω V_{GS}=10V,R_{GEN}=3Ω	-	4.0	-	nS
Turn-on Rise Time	t_r		-	3.0	-	nS
Turn-Off Delay Time	$t_{d(off)}$		-	15	-	nS
Turn-Off Fall Time	t_f		-	2.0	-	nS
Total Gate Charge	Q_g	V_{DS}=20V,I_D=8A, V_{GS}=10V	-	12	-	nC
Gate-Source Charge	Q_{gs}		-	3.5	-	nC
Gate-Drain Charge	Q_{gd}		-	3.1	-	nC
Drain-Source Diode Characteristics						
Diode Forward Voltage (Note 3)	V_{SD}	V_{GS}=0V,I_S=8A	-	0.75	1.0	V

JSMICRO Semiconductor

Notes:

1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. Surface Mounted on FR4 Board, t ≤ 10 sec.
3. Pulse Test: Pulse Width ≤ 300μs, Duty Cycle ≤ 2%.
4. Guaranteed by design, not subject to production

N- Channel Typical Electrical and Thermal Characteristics (Curves)

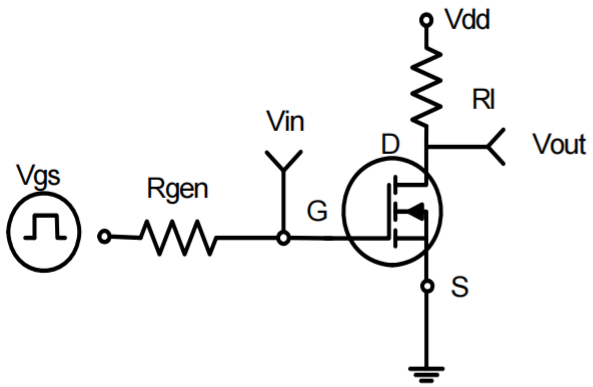


Figure 1:Switching Test Circuit

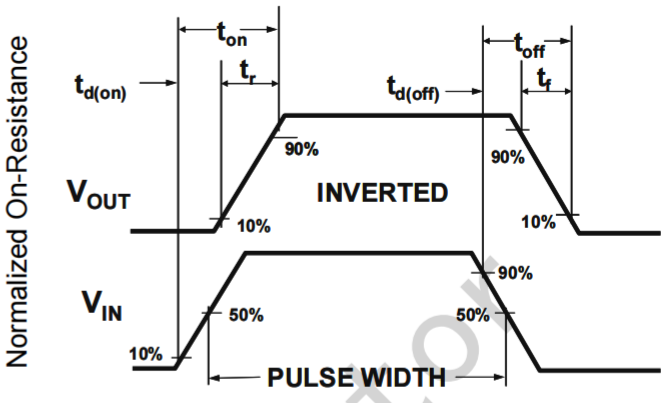


Figure 2:Switching Waveforms

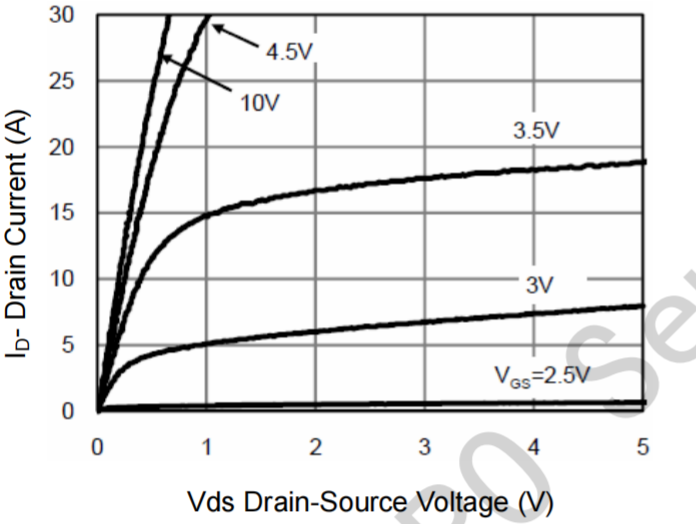


Figure 3 Output Characteristics

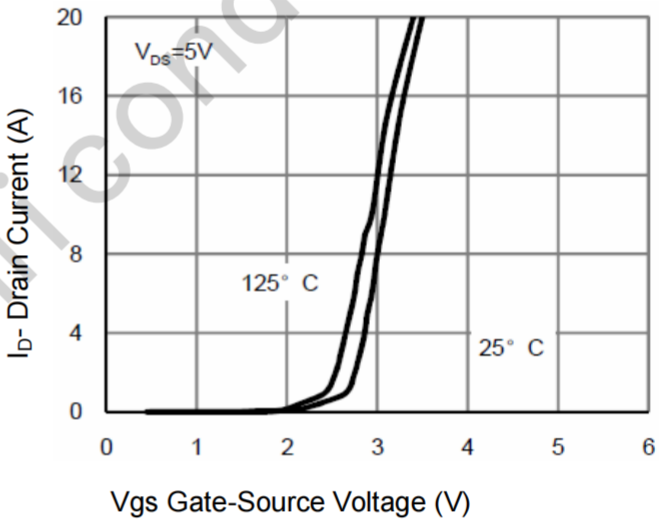


Figure 4 Transfer Characteristics

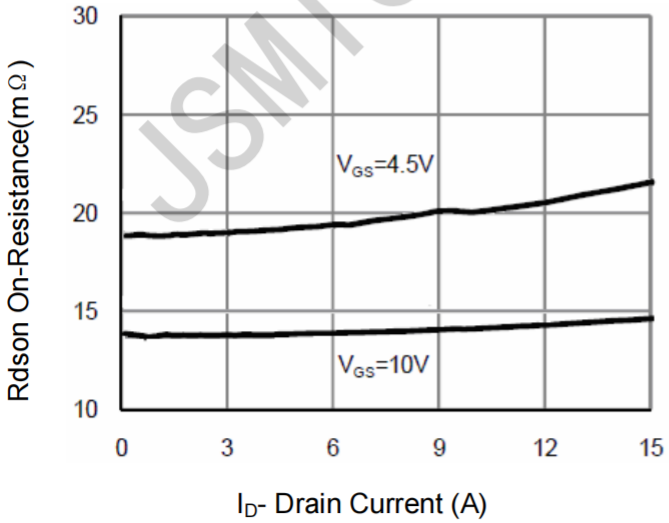


Figure 5 Drain-Source On-Resistance

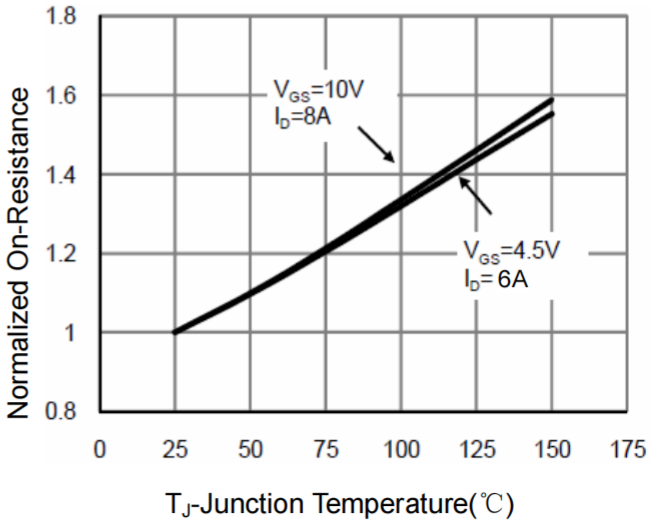


Figure 6 Drain-Source On-Resistance

JSMICRO Semiconductor

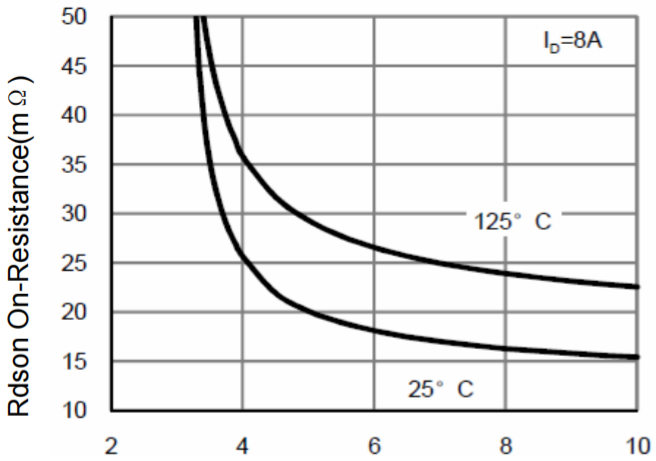


Figure7 Rdson vs Vgs

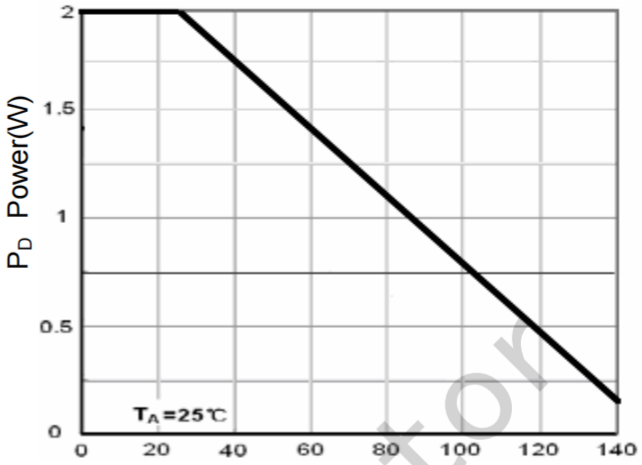


Figure 8 Power Dissipation

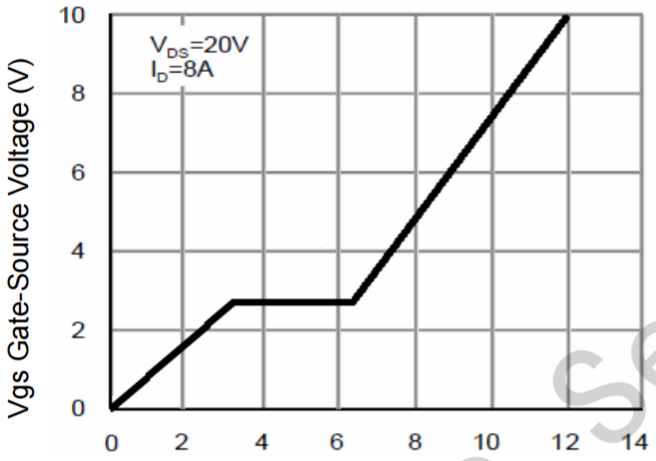


Figure 9 Gate Charge

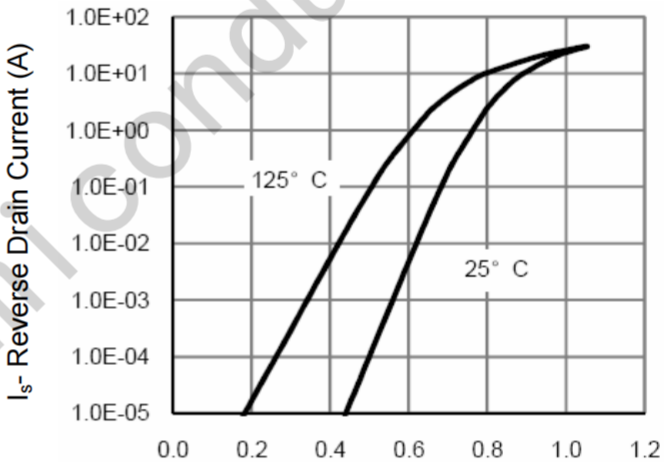


Figure 10 Source- Drain Diode Forward

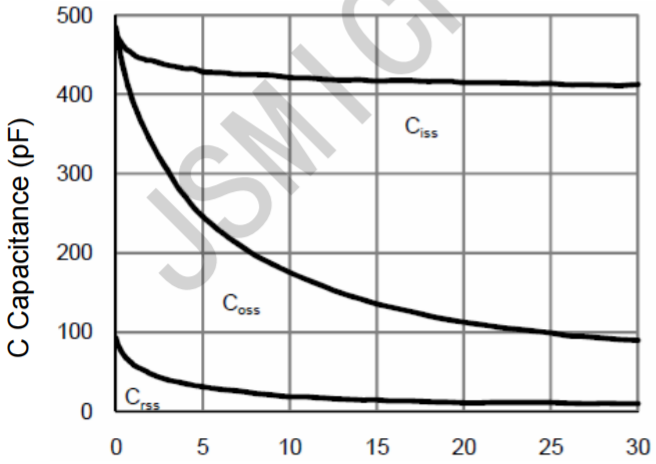


Figure 11 Capacitance vs Vds

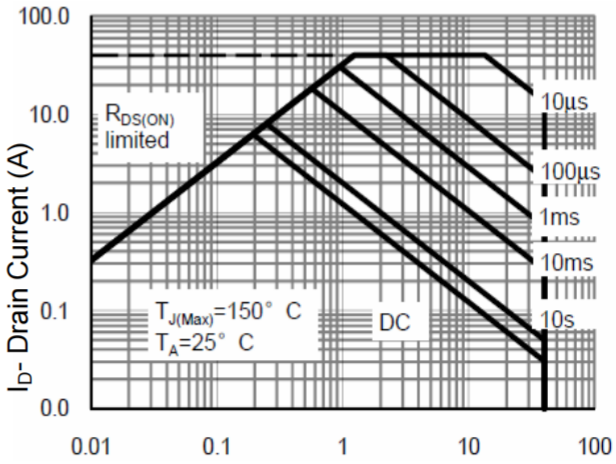


Figure 12 Safe Operation Area

JSMICRO Semiconductor

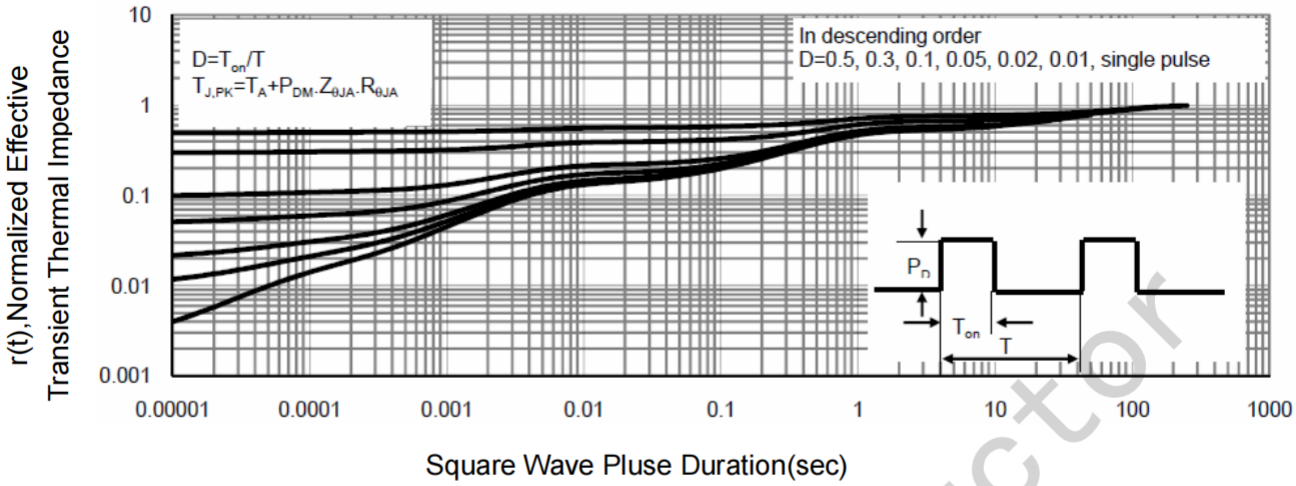


Figure 13 Normalized Maximum Transient Thermal Impedance

JSMICRO Semiconductor

P-CH Electrical Characteristics (T_A=25℃unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	V_{GS}=0V I_D=-250μA	-40	-	-	V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS}=-40V,V_{GS}=0V	-	-	-1	μA
Gate-Body Leakage Current	I_{GSS}	V_{GS}=±20V,V_{DS}=0V	-	-	±100	nA
On Characteristics (Note 3)						
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS}=V_{GS},I_D=-250μA	-1.1	-1.8	-2.5	V
Drain-Source On-State Resistance	$R_{DS(ON)}$	V_{GS}=-10V, I_D=-7.0A V_{GS}=-4.5V, I_D=-4.0A	- -	30 43	35 48	mΩ mΩ
Forward Transconductance	g_{FS}	V_{DS}=-5V,I_D=-7.0A	15	-	-	S
Dynamic Characteristics (Note4)						
Input Capacitance	C_{lss}	V_{DS}=-20V,V_{GS}=0V, F=1.0MHz	-	520	-	PF
Output Capacitance	C_{oss}		-	100	-	PF
Reverse Transfer Capacitance	C_{rss}		-	65	-	PF
Switching Characteristics (Note 4)						
Turn-on Delay Time	$t_{d(on)}$	V_{DD}=-20V, R_L=2.3Ω V_{GS}=-10V,R_{GEN}=6Ω	-	7.5	-	nS
Turn-on Rise Time	t_r		-	5.5	-	nS
Turn-Off Delay Time	$t_{d(off)}$		-	19	-	nS
Turn-Off Fall Time	t_f		-	7	-	nS
Total Gate Charge	Q_g	V_{DS}=-20V,I_D=-7.0A V_{GS}=-10V	-	13	-	nC
Gate-Source Charge	Q_{gs}		-	3.8	-	nC
Gate-Drain Charge	Q_{gd}		-	3.1	-	nC
Drain-Source Diode Characteristics						
Diode Forward Voltage (Note 3)	V_{SD}	V_{GS}=0V,I_S=-7.0A	-	0.75	-1.0	V

JSMICRO Semiconductor

Notes:

1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. Surface Mounted on FR4 Board, t ≤ 10 sec.
3. Pulse Test: Pulse Width ≤ 300μs, Duty Cycle ≤ 2%.
4. Guaranteed by design, not subject to production

P- Channel Typical Electrical and Thermal Characteristics (Curves)

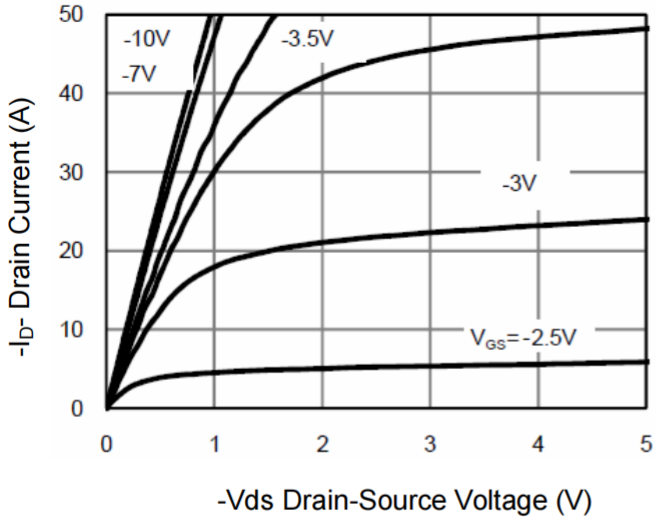


Figure 1 Output Characteristics

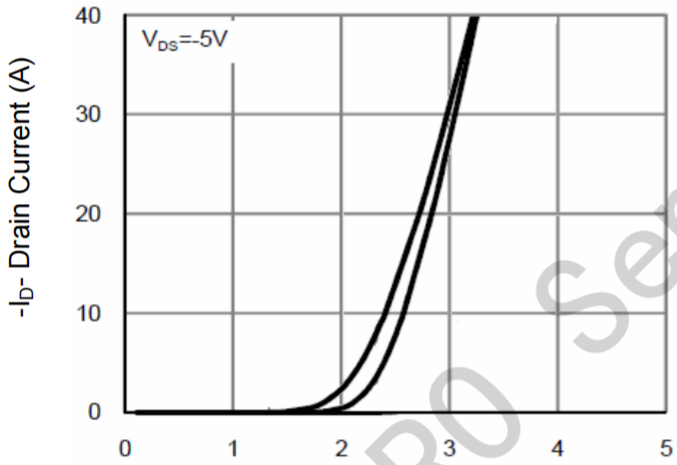


Figure 2 Transfer Characteristics

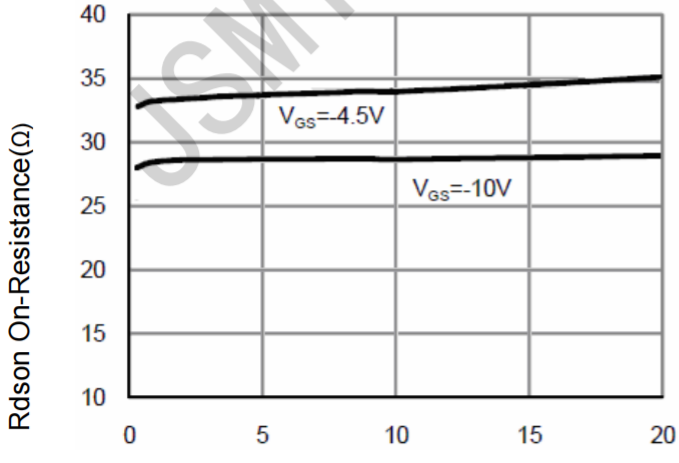


Figure 3 Rdson- Drain Current

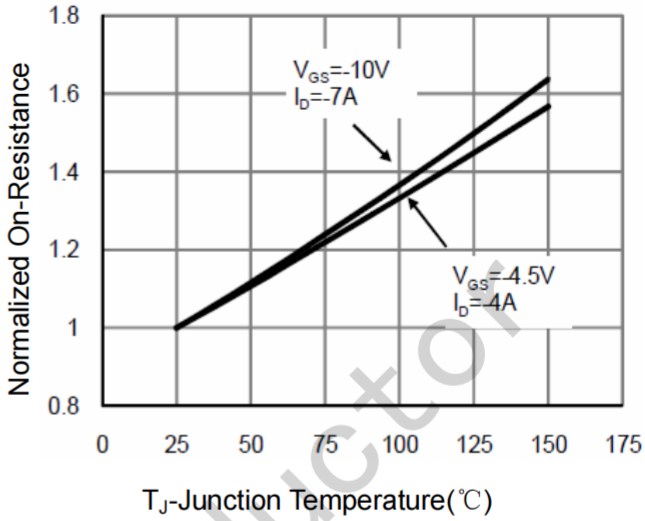


Figure 4 Rdson-Junction Temperature

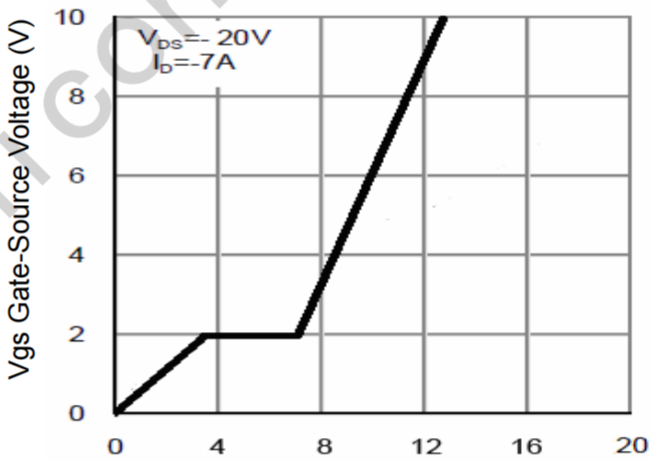


Figure 5 Gate Charge

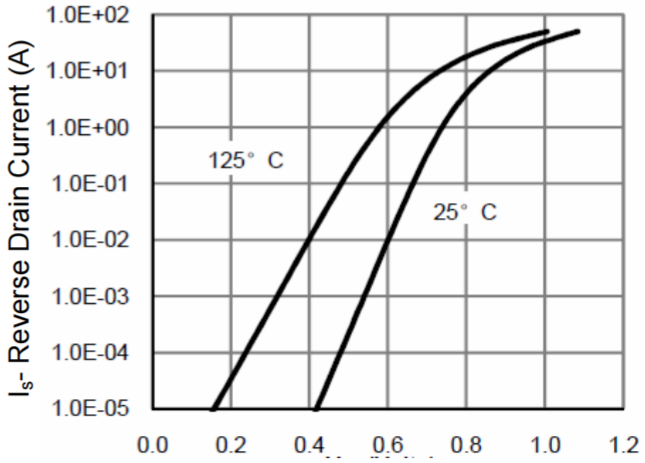


Figure 6 Source- Drain Diode Forward

JSMICRO Semiconductor

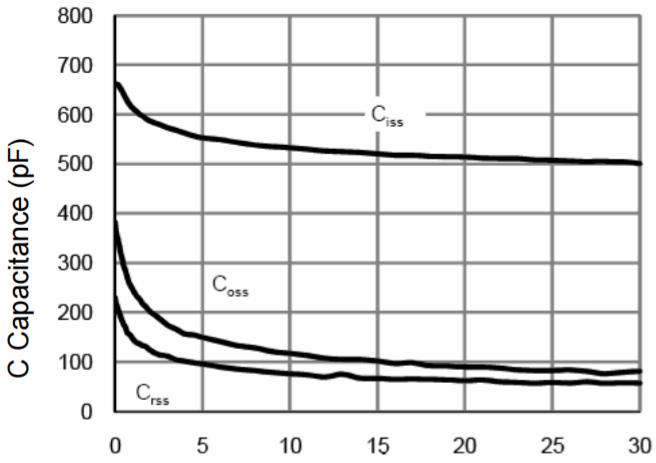


Figure 7 Capacitance vs Vds

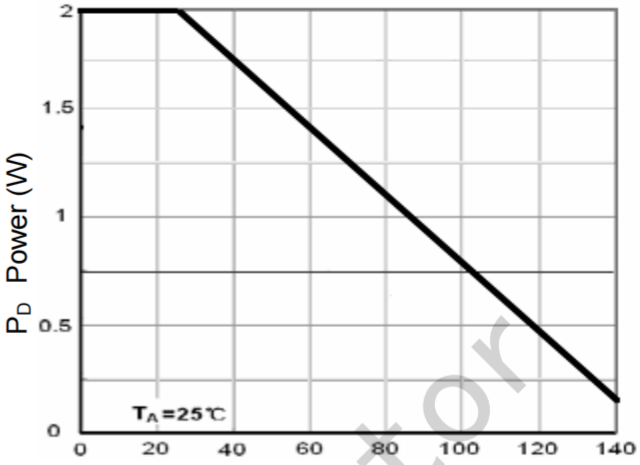


Figure 9 Power Dissipation

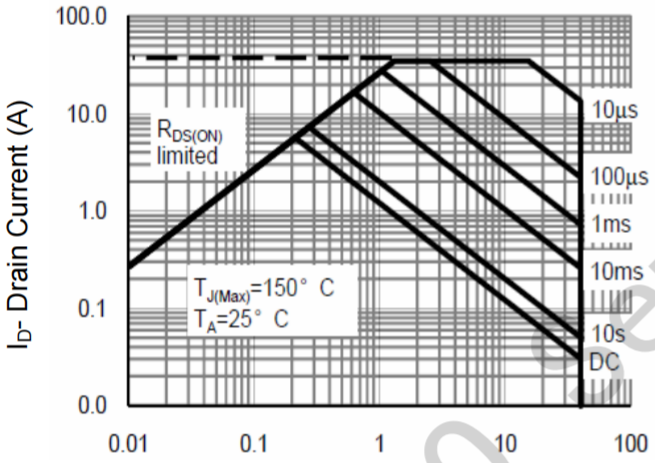


Figure 8 Safe Operation Area

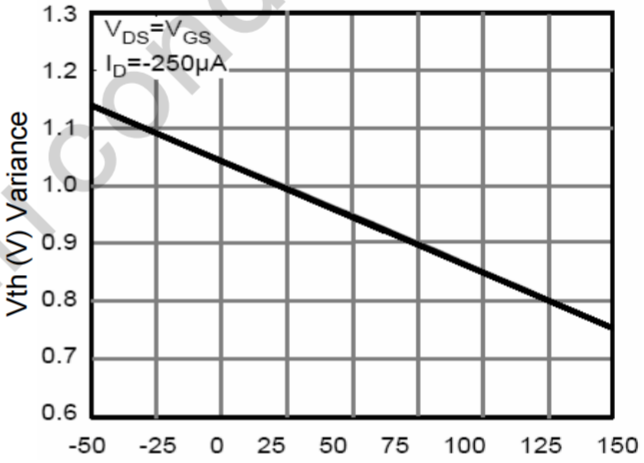


Figure 10 $V_{GS(th)}$ vs Junction Temperature


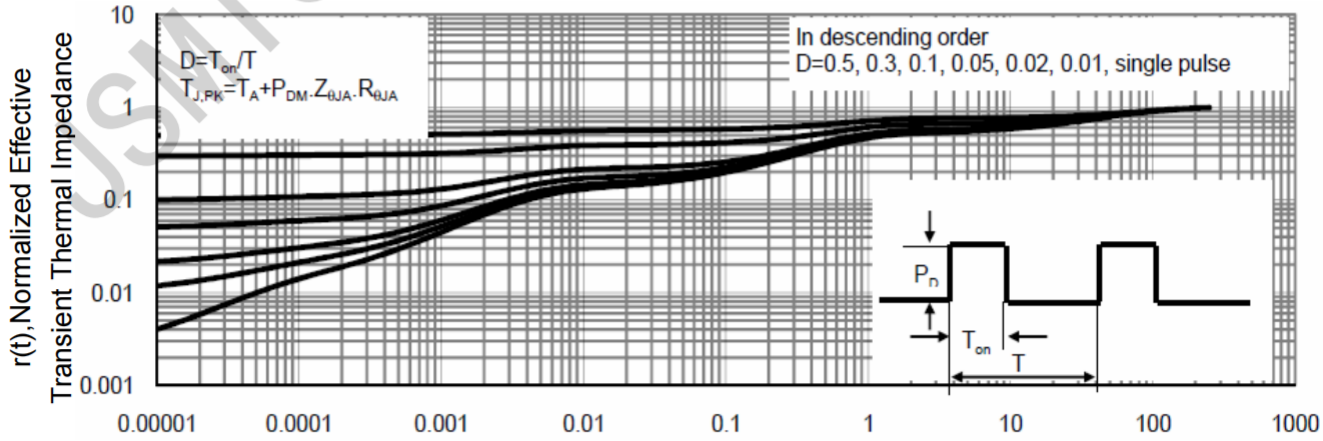


Figure 11 Normalized Maximum Transient Thermal Impedance

JSMICRO semiconductor

Package Information


SOP-8

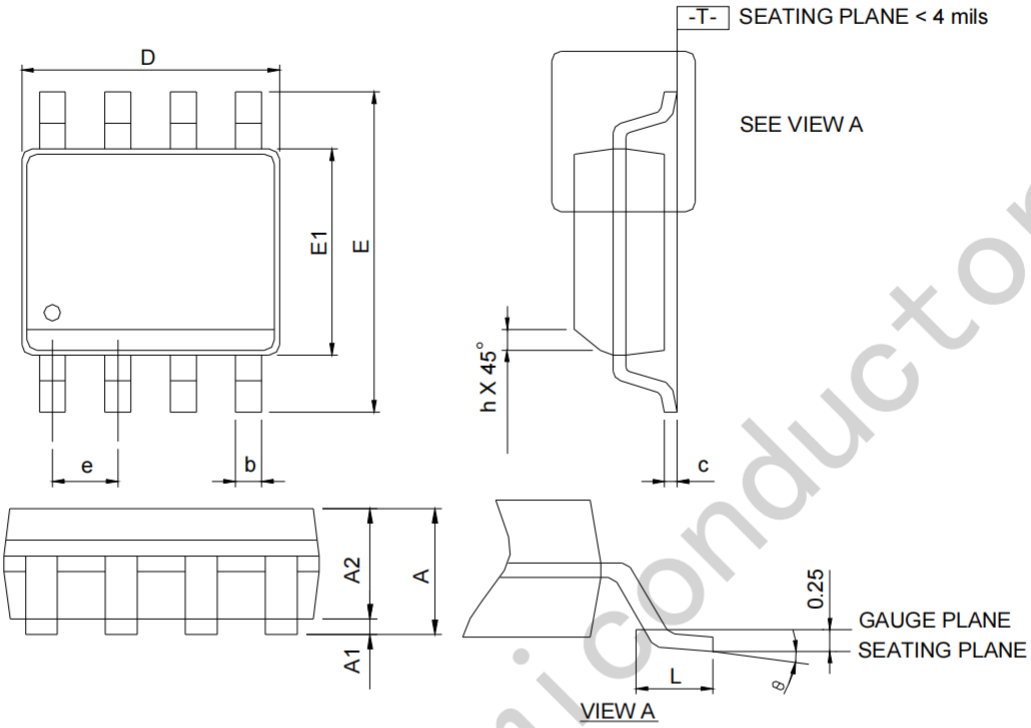

SYMBOL	SOP-8			
	MILLIMETERS		INCHES	
	MIN.	MAX.	MIN.	MAX.
A	-	1.75	-	0.069
A1	0.10	0.25	0.004	0.010
A2	1.25	-	0.049	-
b	0.31	0.51	0.012	0.020
c	0.17	0.25	0.007	0.010
D	4.80	5.00	0.189	0.197
E	5.80	6.20	0.228	0.244
E1	3.80	4.00	0.150	0.157
e	1.27 BSC		0.050 BSC	
h	0.25	0.50	0.010	0.020
L	0.40	1.27	0.016	0.050
θ	0°	8°	0°	8°

Note: 1. Follow JEDEC MS-012 AA.
2. Dimension "D" does not include mold flash, protrusions or gate burrs. Mold flash, protrusion or gate burrs shall not exceed 6 mil per side.
3. Dimension "E" does not include inter-lead flash or protrusions. Inter-lead flash and protrusions shall not exceed 10 mil per side.

RECOMMENDED LAND PATTERN

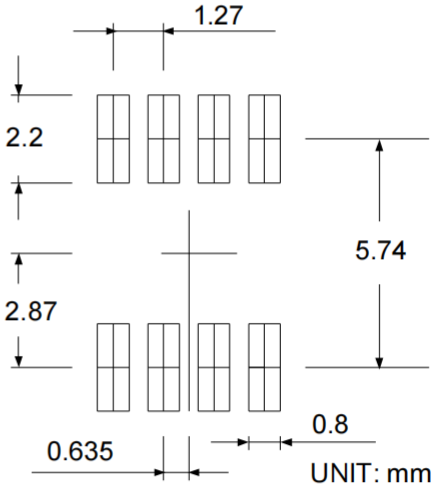

JSMICRO Semiconductor