TECH PUBLIC
台舟电子

2SD1616AG

NPN General Purpose Transistor

WWW.TECHPUBLIC.COM


Product Summary

- BVCBO ≥ 120V(IC=0.1mA)
- BVCEO ≥ 60V(IC=1mA)
- IC = 1A


Features

- Consumer electronics
- Voltage switching
- High DC Current Gain

Circuit diagram and pin information

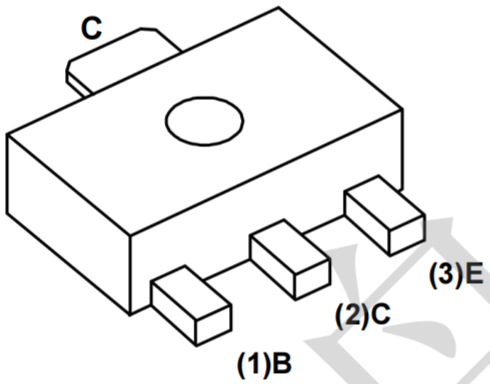

SOT89-3

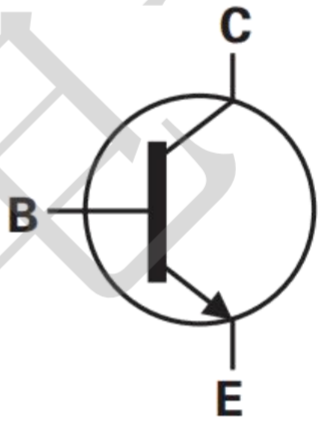

Absolute Maximum Ratings

(Ta=25°C unless otherwise specified)

PARAMETER	SYMBOL	LIMIT	UNIT
Collector-Base Voltage	V_{CBO}	120	V
Collector-Emitter Voltage	V_{CEO}	60	V
Emitter-Base Voltage	V_{EBO}	6	V
Collector Current (DC)	I_C	1	A
Collector Peak Current (Pulse) Single pulse, Pw ≤ 380μs, Duty ≤ 2%	I_{CM}	2	A
Power Total Dissipation @ T_A=25ºC	P_D	500	mW
Maximum Operating Junction Temperature	T_J	+150	°C
Storage Temperature Range	TSTG	-55 to +150	°C

Electrical Characteristics

(TA=25°C unless otherwise specified)


PARAMETER	CONDITIONS	SYMBOL	MIN	TYP	MAX	UNIT
Static (Note 1)						
Collector-Base Breakdown Voltage	I_C = 0.1mA,IE=0	BV_{CBO}	120	--	--	V
Collector-Emitter Breakdown Voltage	I_C = 1mA,IB=0	BV_{CEO}	60	--	--	V
Emitter-Base Breakdown Voltage	I_E = 0.1mA,IC=0	BV_{EBO}	6	--	--	V
Collector Cutoff Current	V_{CB} = 60V,IE=0	I_{CBO}	--	100	--	nA
Emitter Cutoff Current	V_{EB} = 6V,IC=0	I_{EBO}	--	100	--	nA
Collector-Emitter Saturation Voltage	I_C=1A, I_B =0.05A	$V_{CE(SAT)}$	--	--	0.3	V
Base-Emitter Saturation Voltage	I_C=1A, I_B =0.05A	$V_{BE(SAT)}$	--	--	1.2	V
DC Current Transfer Ratio	V_{CE} =2V, I_C=0.1A	h_{FE}	135	600	--	
Dynamic (Note 2)						
Transition Frequency	V_{CE} =2V, I_C=100mA, f=100MHz	f_T	100	--	--	MHz
Collector Output Capacitance	V_{CB} =10V, I_E=0A, f=10MHz	C_{ob}	--	18	--	pF


Note:
1.Pulse test: ≤380μs, duty cycle ≤2%
2.For DESIGN AID ONLY, not subject to production testing


2SD1616AG


NPN General Purpose Transistor


Typical Performance Characteristics(TA=25°C)

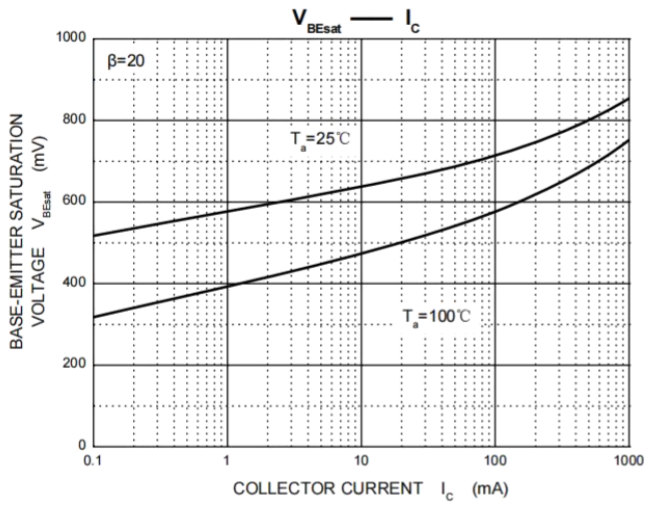


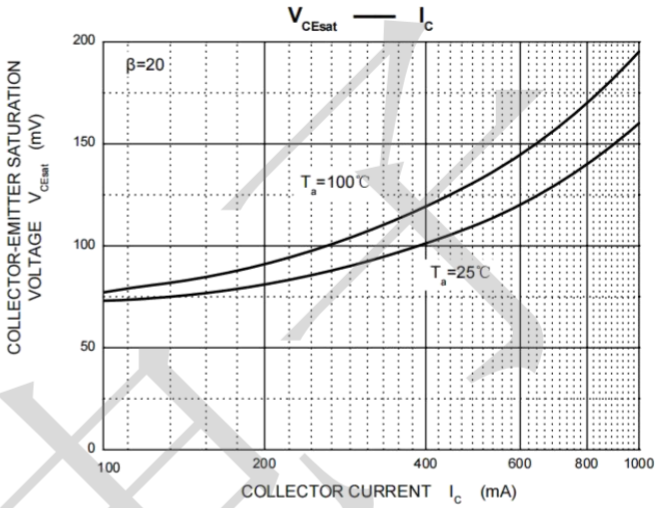

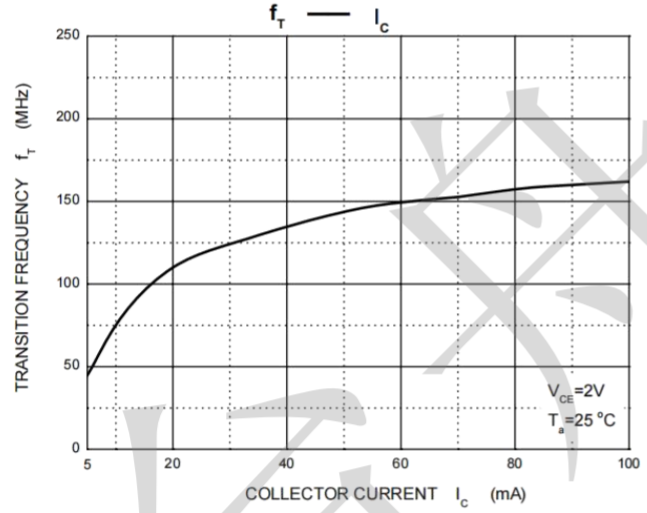

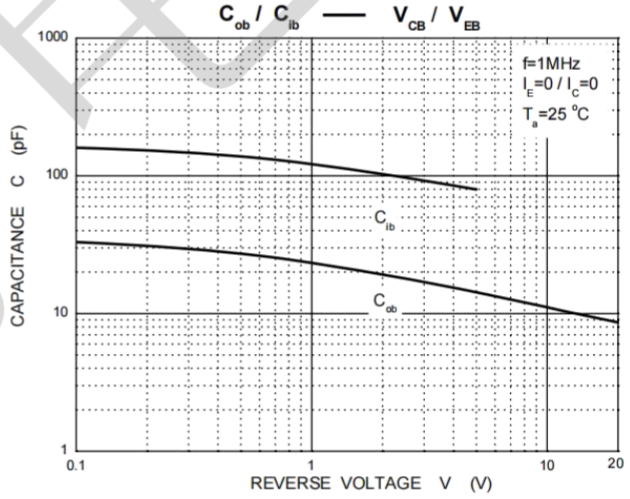


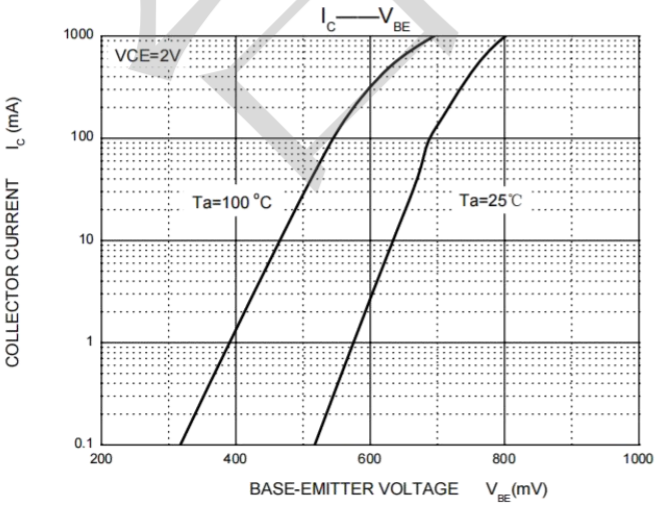

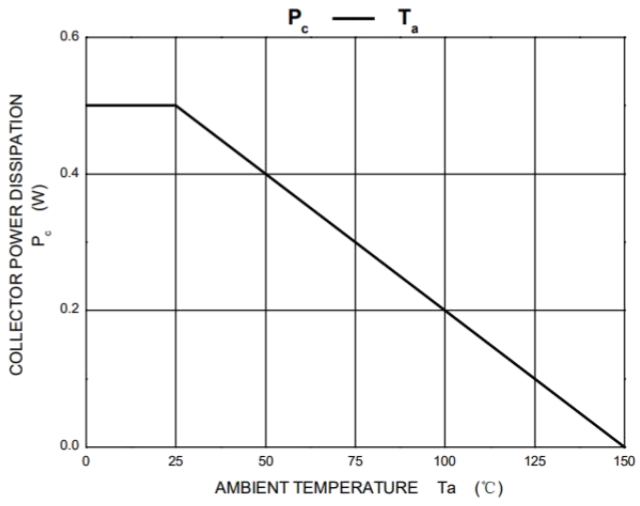

Package Outline Dimensions (unit: mm)

SOT89-3

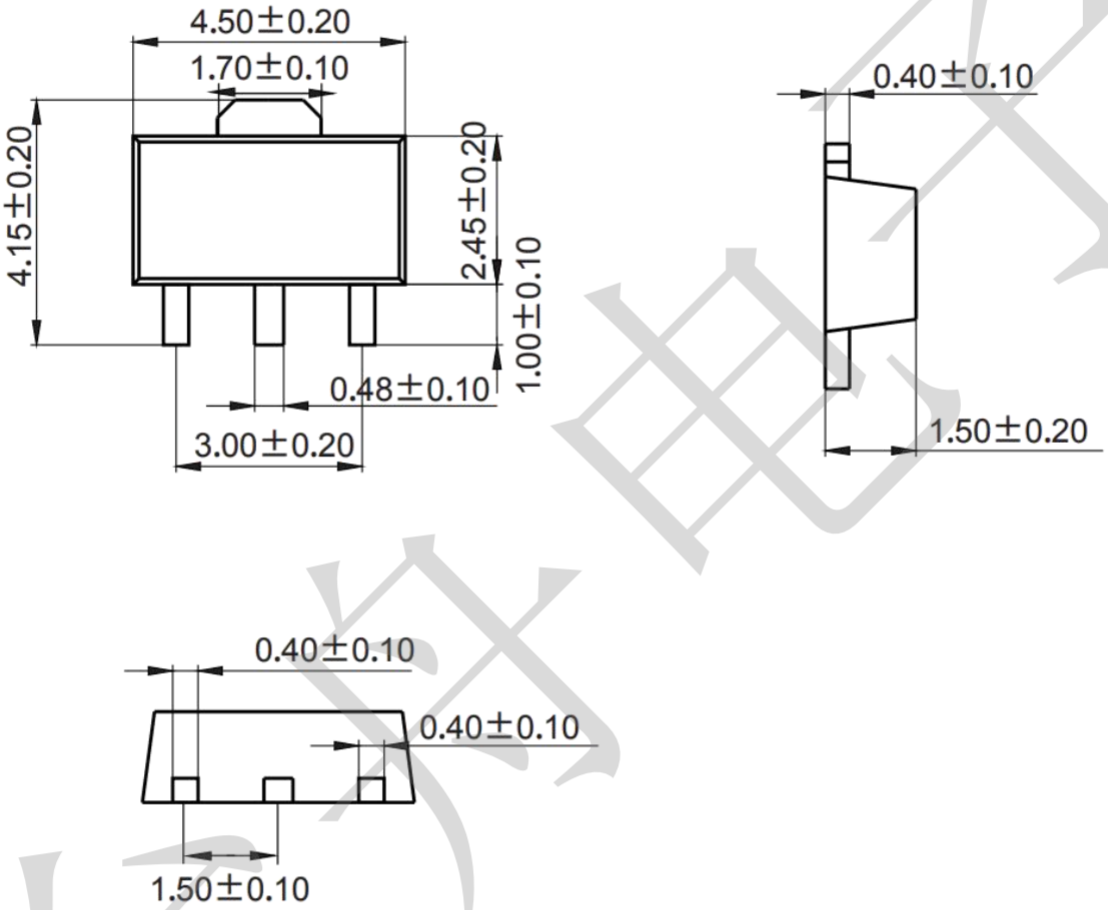

Mounting Pad Layout (unit: mm)

