

S5A THRU S5M

RoHS
COMPLIANT

Surface Mount General Purpose Rectifier

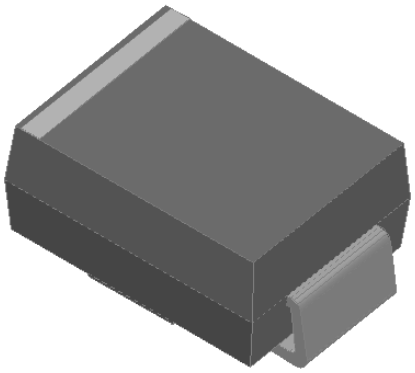



Features

- Low profile package
- Ideal for automated placement
- Glass passivated chip junction
- High forward surge capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

Typical Applications

For use in general purpose rectification of power supplies, inverters, converters, and freewheeling diodes for consumer, and telecommunication.

Mechanical Data

- **Package**: DO-214AA (SMB)
  Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- **Terminals**: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Cathode line denotes the cathode end

■Maximum RatinS (T_a=25℃ Unless otherwise specified）

PARAMETER	SYMBOL	UNIT	S5A	S5B	S5D	S5G	S5J	S5K	S5M
Maximum Repetitive peak reverse voltage	V_{RRM}	V	50	100	200	400	600	800	1000
Maximum RMS Voltage	V_{RMS}	V	35	70	140	280	420	560	700
Maximum DC Blocking Voltage	V_{DC}	V	50	100	200	400	600	800	1000
Average rectified output current @60Hz sine wave, resistance load, TL (Fig.1)	IO	A	5.0						
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave,1 cycle, Tj=25℃	I_{FSM}	A	150						
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, Tj=25℃			300						
Current squared time @1ms≤t≤8.3ms Tj=25℃	I^2t	A^2s	94						
Storage temperature	Tstg	℃	-55 ~ +150						
Junction temperature	Tj	℃	-55 ~ +150						

■Electrical Characteristics（T_a=25℃ Unless otherwise specified）

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	S5A	S5B	S5D	S5G	S5J	S5K	S5M
Maximum instantaneous forward voltage	VF	V	I_{FM}=5.0A	1.1						
Maximum DC reverse current at rated DC blocking voltage	IR	μA	Tj =25℃	5						
			Tj =125℃	100						
Typical junction capacitance	Cj	pF	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C	34						

■Thermal Characteristics （T_a=25℃ Unless otherwise specified）

PARAMETER	SYMBOL	UNIT	S5A	S5B	S5D	S5G	S5J	S5K	S5M
Typical Thermal resistance	$R_{\theta J-A}$	℃/W	80[1]						
	$R_{\theta J-L}$		35[1]						
	$R_{\theta J-C}$		30[1]						

Note:
(1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.3" x 0.3" (8.0 mm x 8.0 mm) copper pad areas

■ Characteristics (Typical)

FIG1：Io-TL Curve

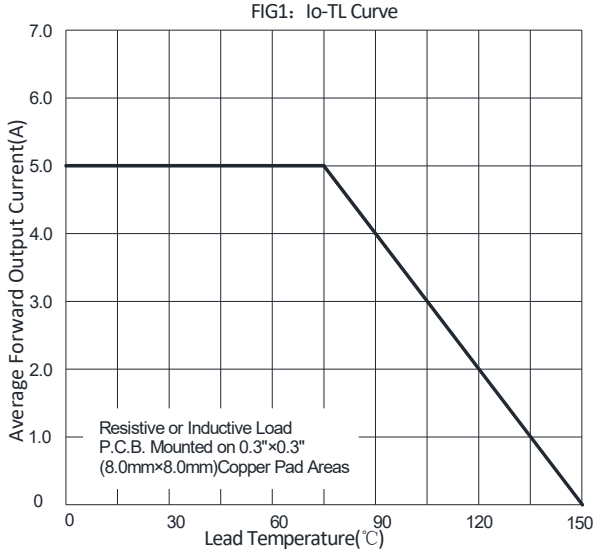


FIG2：Surge Forward Current Capability

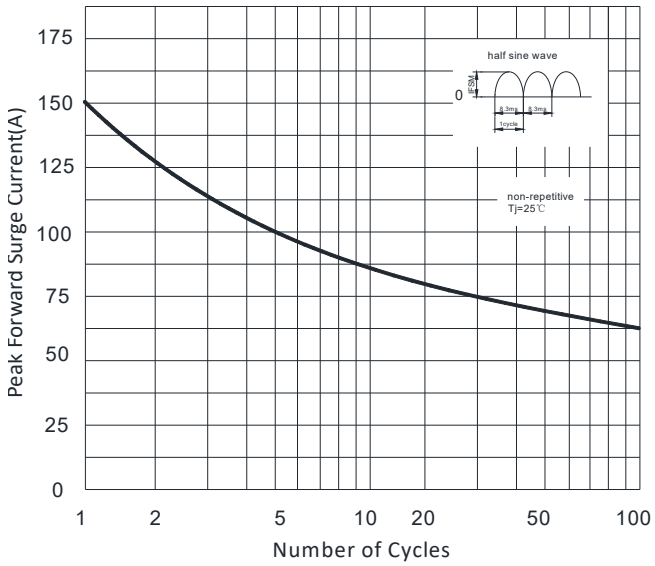


FIG3：Typical Forward Voltage


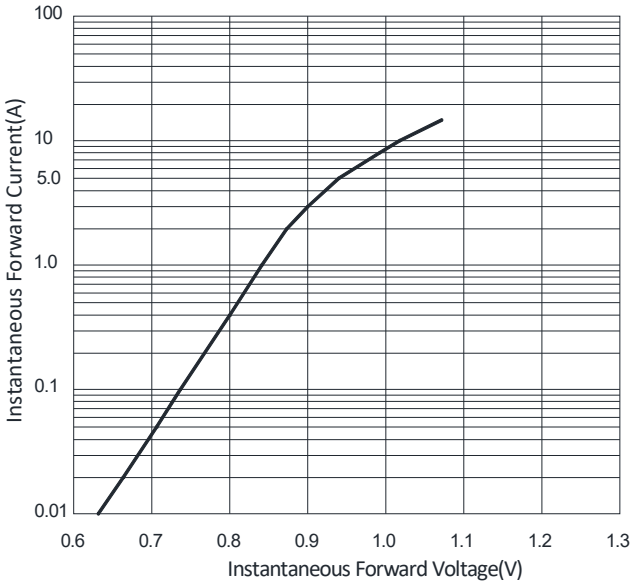



FIG4:Typical Reverse Characteristics

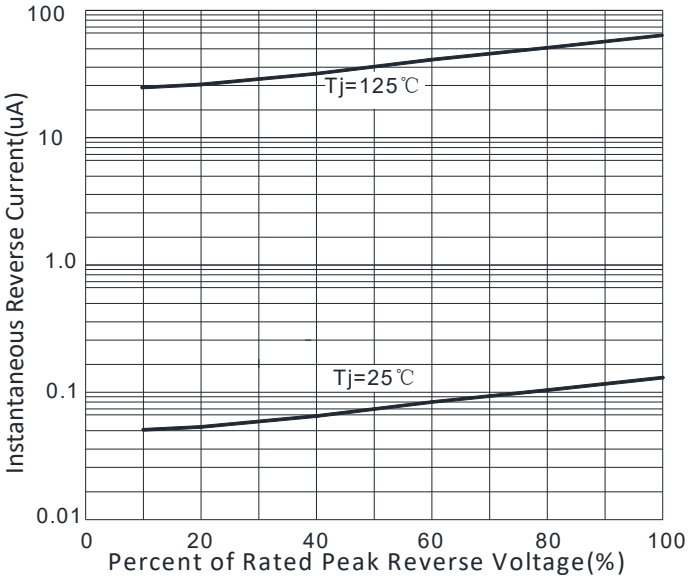

■**Ordering Information** (Example)

P/N	PKG	QTY
S5A-S5M	SMB(DO-214AA)	3000

■ **Outline Dimensions**

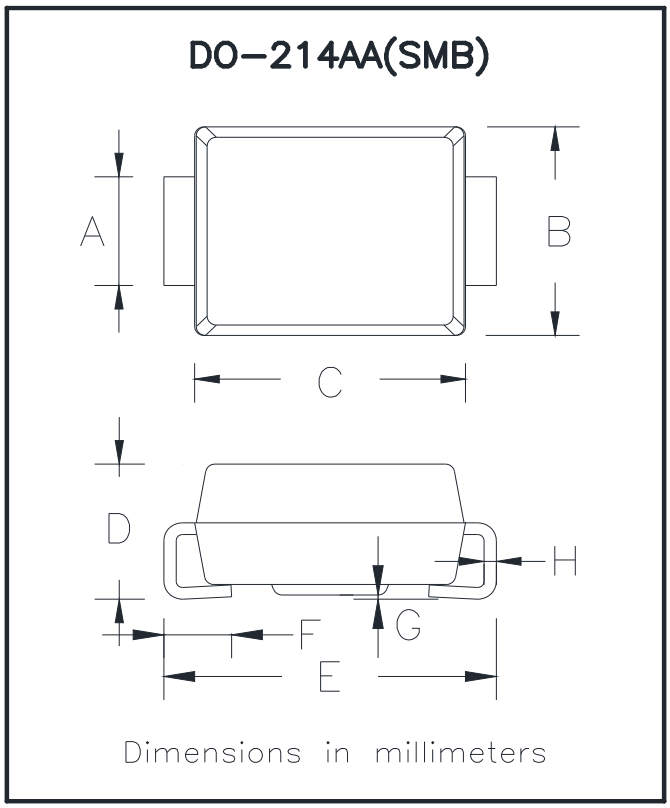

DO-214AA(SMB)		
Dim	Min	Max
A	1.85	2.15
B	3.30	3.94
C	4.05	4.75
D	1.99	2.61
E	5.21	5.59
F	0.90	1.41
G	0.05	0.20
H	0.15	0.31