

DATASHEET

6 PIN DIP PHOTOTRANSISTOR PHOTOCOUPLER
4N2X Series
4N3X Series
H11AX Series

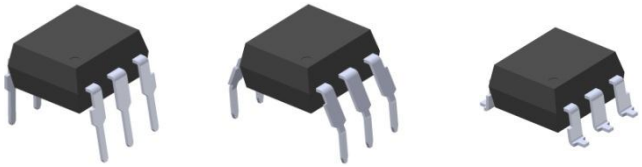

Schematic



Pin Configuration

1. Anode
2. Cathode
3. No Connection
4. Emitter
5. Collector
6. Base

Features:

- 4N2X series: 4N25, 4N26, 4N27, 4N28
- 4N3X series: 4N35, 4N36, 4N37, 4N38
- H11AX series: H11A1, H11A2, H11A3, H11A4, H11A5
- High isolation voltage between input and output (Viso=5000 V rms)
- Creepage distance >7.62 mm
- Operating temperature up to +110°C
- Compact dual-in-line package
- The product itself will remain within RoHS compliant version
- Compliance with EU REACH
- UL and cUL approved(No. E214129)
- VDE approved (No. 132249)
- SEMKO approved
- NEMKO approval
- DEMKO approval
- FIMKO approval
- CQC approved

Description

The 4N2X, 4N3X, H11AX series of devices each consist of an infrared emitting diode optically coupled to a phototransistor.
They are packaged in a 6-pin DIP package and available in wide-lead spacing and SMD option.

Applications

- Power supply regulators
- Digital logic inputs
- Microprocessor inputs

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug 9, 2018. Issue No: DPC-0000045 Rev. 7

Ver.: 7 Release Date:08/14/2018 狀態:Approved(正式發行)

Absolute Maximum Ratings (Ta=25℃)

Parameter		Symbol	Rating	Unit
Input	Forward current	I_F	60	mA
	Peak forward current (t = 10μs)	I_{FM}	1	A
	Reverse voltage	V_R	6	V
	Power dissipation (T_A = 25°C)	P_D	100	mW
	Derating factor (above 100°C)		3.8	mW/°C
Output	Collector-Emitter voltage	V_{CEO}	80	V
	Collector-Base voltage	V_{CBO}	80	V
	Emitter-Collector voltage	V_{ECO}	7	V
	Emitter-Base voltage	V_{EBO}	7	V
	Power dissipation (T_A = 25°C)	P_C	150	mW
	Derating factor (above 100°C)		9.0	mW/°C
Total Power Dissipation		P_{TOT}	200	mW
Isolation Voltage*1		V_{ISO}	5000	V rms
Operating Temperature		T_{OPR}	-55 to 110	°C
Storage Temperature		T_{STG}	-55 to 125	°C
Soldering Temperature*2		T_{SOL}	260	°C

Notes:
*1 AC for 1 minute, R.H.= 40 ~ 60% R.H. In this test, pins 1, 2 & 3 are shorted together, and pins 4, 5 & 6 are shorted together.
*2 For 10 seconds

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug 9, 2018. Issue No: DPC-0000045 Rev. 7
Ver.: 7 Release Date: 08/14/2018 狀態: Approved(正式發行)

Electro-Optical Characteristics (Ta=25℃ unless specified otherwise)

Input

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Forward voltage	V_F	-	1.2	1.5	V	I_F = 10mA
Reverse current	I_R	-	-	10	μA	V_R = 6V
Input capacitance	C_{in}	-	30	-	pF	V = 0, f = 1MHz

Output

Parameter		Symbol	Min	Typ.	Max.	Unit	Condition
Collector-Base dark current		I_{CBO}	-	-	20	nA	V_{CB} = 10V
Collector-Emitter dark current	4N2X H11AX	I_{CEO}	-	-	50	nA	V_{CE} = 10V, IF=0mA
	4N3X		-	-	50		V_{CE} = 60V, IF=0mA
Collector-Emitter breakdown voltage		BV_{CEO}	80	-	-	V	I_c=1mA
Collector-Base breakdown voltage		BV_{CBO}	80	-	-	V	I_C=0.1mA
Emitter-Collector breakdown voltage		BV_{ECO}	7	-	-	V	I_E=0.1mA
Emitter-Base breakdown voltage		BV_{EBO}	7	-	-	V	I_E=0.1mA
Collector-Emitter capacitance		C_{CE}	-	8	-	pF	VCE=0V, f=1MHz

* Typical values at T_a = 25°C

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug 9, 2018. Issue No: DPC-0000045 Rev. 7

Ver.: 7 Release Date: 08/14/2018 狀態: Approved(正式發行)

Transfer Characteristics

Parameter		Symbol	Min	Typ.	Max.	Unit	Condition
Current Transfer ratio	4N35, 4N36, 4N37	CTR	100	-	-	%	I_F = ±10mA ,V_{CE} = 10V
	H11A1		50	-	-		
	H11A5		30	-	-		
	4N25, 4N26, 4N38, H11A2, H11A3		20	-	-		
	4N27, 4N28, H11A4		10	-	-		
Collector-Emitter saturation voltage	4N25, 4N26, 4N27, 4N28	$V_{CE(sat)}$	-	-	0.5	V	I_F = 50mA, I_c = 2mA
	4N35, 4N36, 4N37		-	-	0.3		I_F = 10mA, I_c = 0.5mA
	H11A1,H11A2, H11A3,H11A4, H11A5		-	-	0.4		
	4N38		-	-	1.0		I_F = 20mA, I_c = 4mA
Isolation resistance		R_{IO}	10^{11}	-	-	Ω	V_{IO} = 500Vdc
Input-output capacitance		C_{IO}	-	0.2	-	pF	V_{IO} = 0, f = 1MHz
Turn-on time	4N25, 4N26, 4N27, 4N28, H11A1,H11A2, H11A3,H11A4, H11A5	Ton	-	3	10	μs	V_{CC} = 10V, I_F = 10mA, R_L = 100Ω See Fig. 11
	4N35, 4N36, 4N37, 4N38		-	10	12		V_{CC} = 10V, I_C = 2mA, R_L = 100Ω, See Fig. 11
Turn-off time	4N25, 4N26, 4N27, 4N28, H11A1,H11A2, H11A3,H11A4, H11A5	Toff	-	3	10	μs	V_{CC} = 10V, I_F = 10mA, R_L = 100Ω See Fig. 11
	4N35, 4N36, 4N37, 4N38		-	9	12		V_{CC} = 10V, I_C = 2mA, R_L = 100Ω, See Fig. 11

* Typical values at T_a = 25°C

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug 9, 2018. Issue No: DPC-0000045 Rev. 7

Ver.: 7 Release Date:08/14/2018 狀態:Approved(正式發行)

Typical Electro-Optical Characteristics Curves

Figure 1. Forward Current vs Forward Voltage

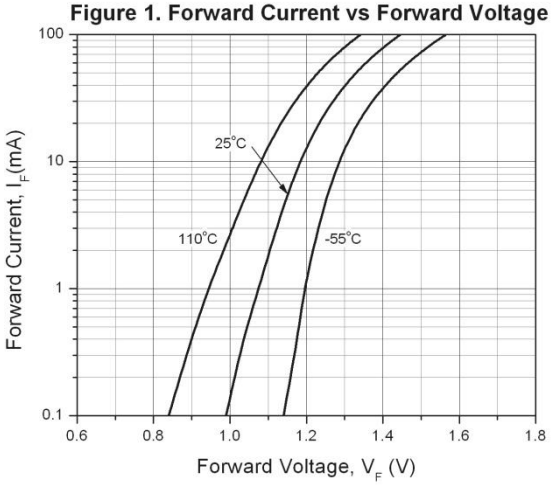


Figure 2. Current Tranfer Ratio vs Forward Current

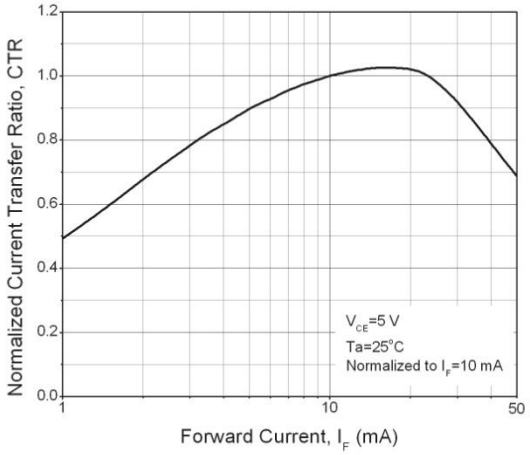


Figure 3. Current Tranfer Ratio vs Ambient Temperature

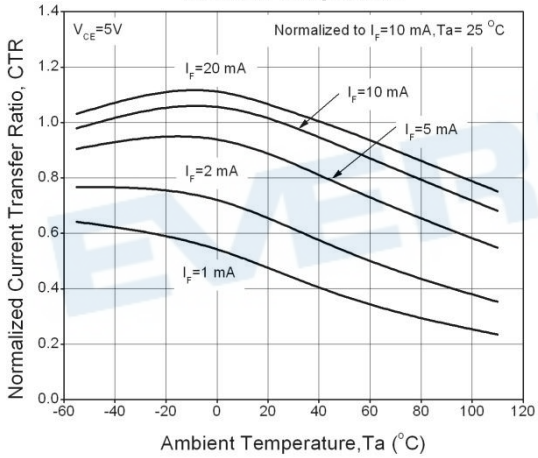


Figure 4. Current Transfer Ratio (Saturated) vs Base-Emitter Resistance

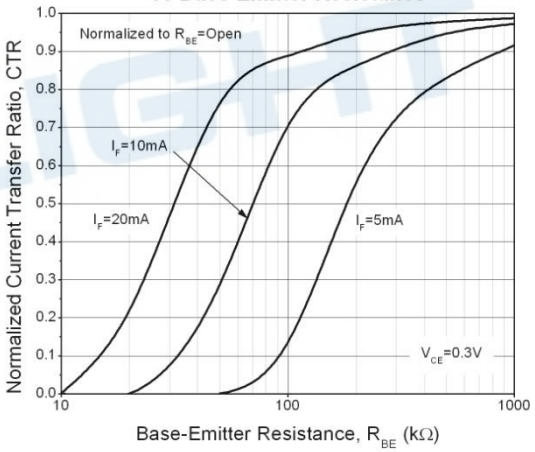


Figure 5. Current Transfer Ratio (Unsaturated) vs Base-Emitter Resistance


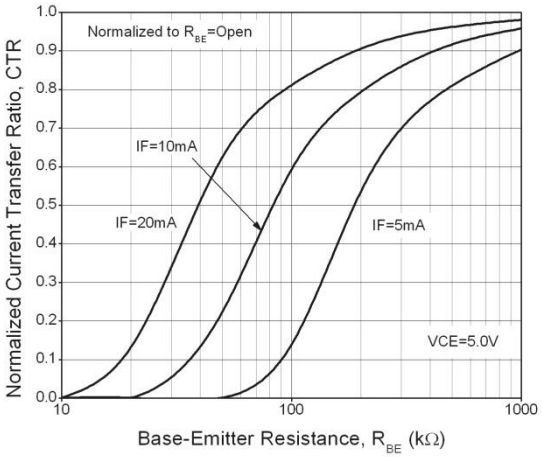


Figure 6. Dark Current vs Ambient Temperature

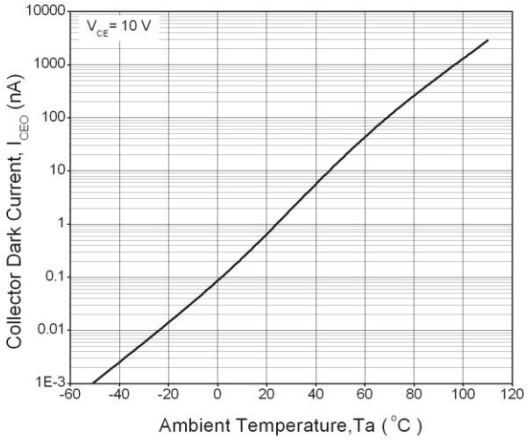

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug 9, 2018. Issue No: DPC-0000045 Rev. 7
Ver.: 7 Release Date:08/14/2018 狀態:Approved(正式發行)

Figure 7. Collector-Emitter Saturation Voltage vs Collector Current

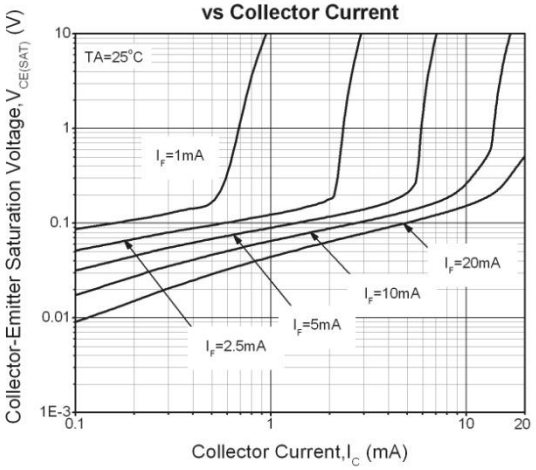


Figure 8. Switching Time vs Load Resistance

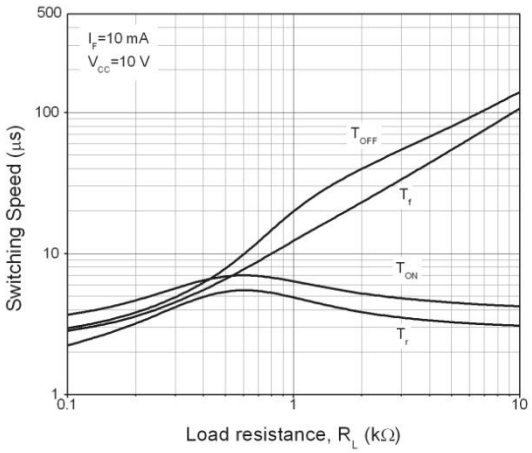


Figure 9. Turn-on Time vs Base-Emitter Resistance)

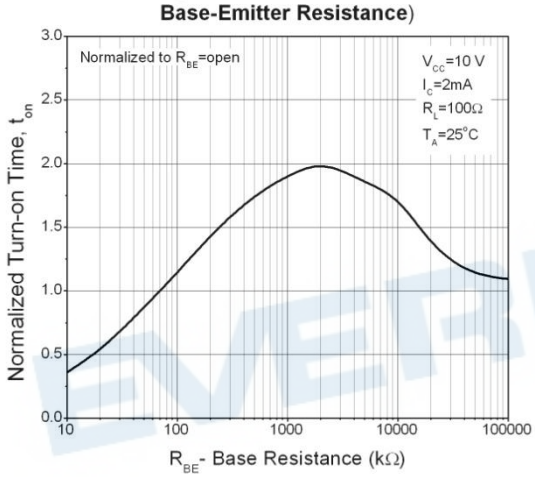
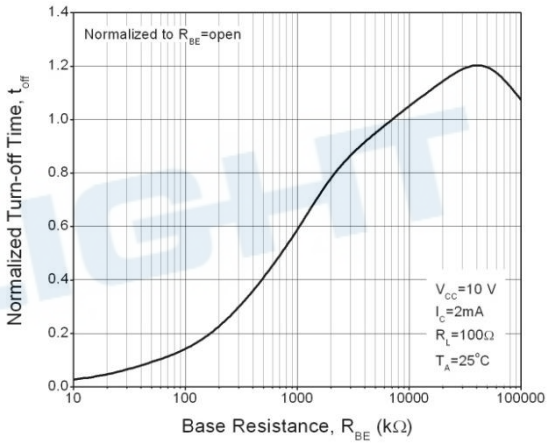


Figure 10. Turn-off Time vs Base-Emitter Resistance



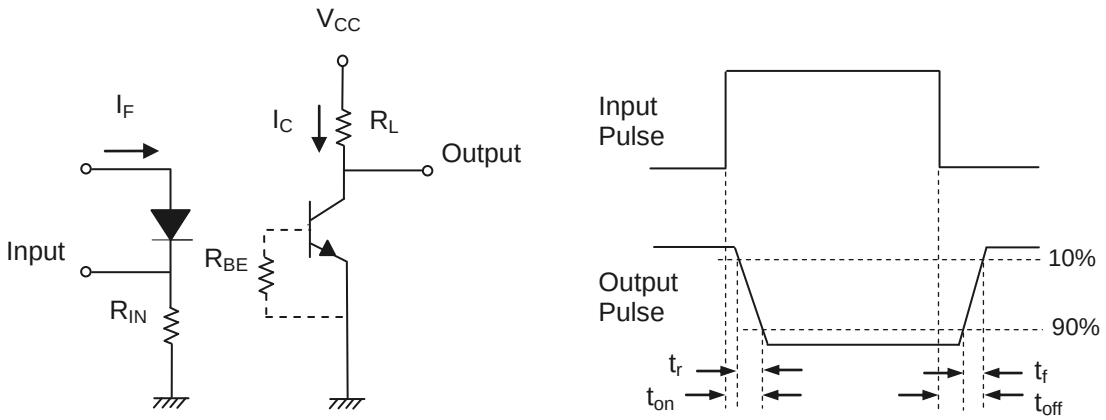


Figure 11. Switching Time Test Circuit & Waveforms

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug 9, 2018. Issue No: DPC-0000045 Rev. 7

Ver.: 7 Release Date: 08/14/2018 狀態: Approved(正式發行)

Order Information

Part Number

4NXXY(Z)-V

or

H11AXY(Z)-V

Note

XX = Part no. for 4NXX series (25, 26, 27, 28, 35, 36, 37 or 38)
X = Part no. for H11AX series (1, 2, 3, 4, or 5)
Y = Lead form option (S, S1, M or none)
Z = Tape and reel option (TA, TB or none).
V = VDE safety (optional)


Option	Description	Packing quantity
None	Standard DIP-6	65 units per tube
M	Wide lead bend (0.4 inch spacing)	65 units per tube
S (TA)	Surface mount lead form + TA tape & reel option	1000 units per reel
S (TB)	Surface mount lead form + TB tape & reel option	1000 units per reel
S1 (TA)	Surface mount lead form (low profile) + TA tape & reel option	1000 units per reel
S1 (TB)	Surface mount lead form (low profile) + TB tape & reel option	1000 units per reel

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug 9, 2018. Issue No: DPC-0000045 Rev. 7


Ver.: 7 Release Date: 08/14/2018 狀態: Approved(正式發行)

Package Dimension (Dimensions in mm)

Standard DIP Type

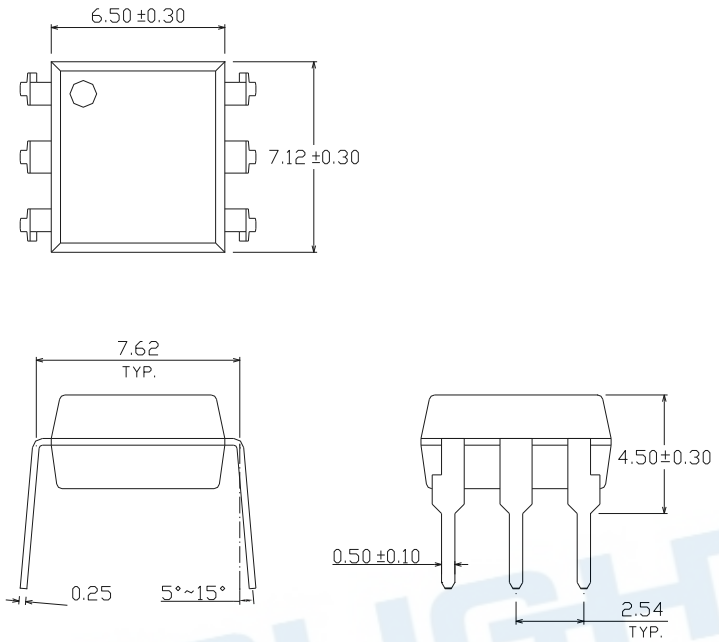


Option M Type

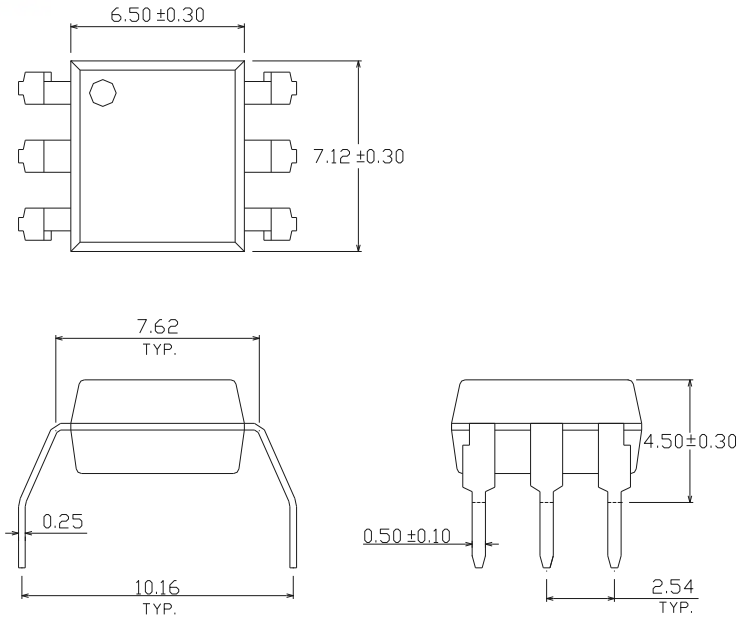


Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug 9, 2018. Issue No: DPC-0000045 Rev. 7

Ver.:7 Release Date:08/14/2018 狀態:Approved(正式發行)

Option S Type

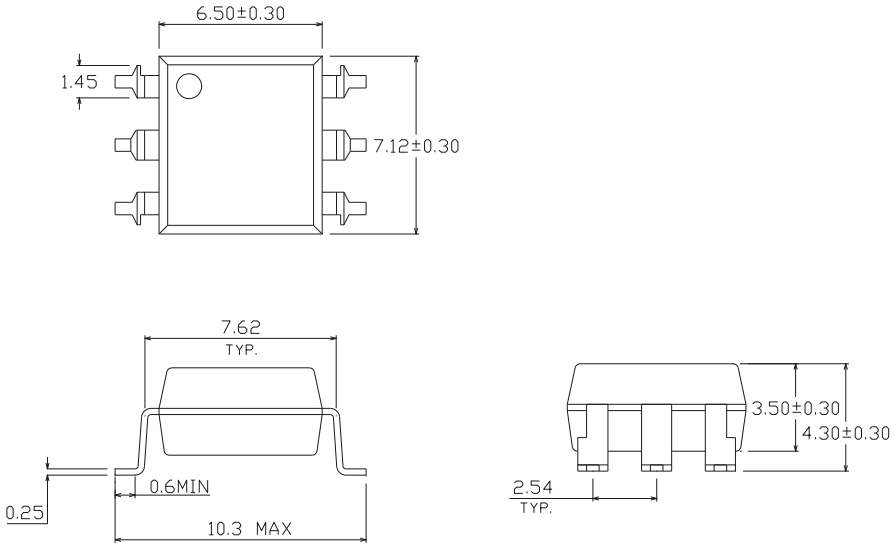


Option S1 Type

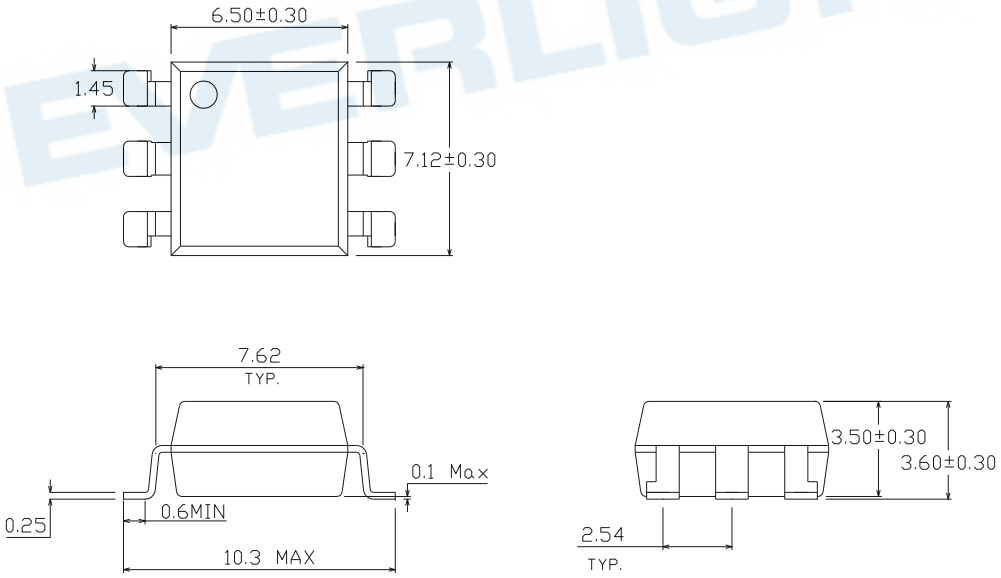

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug 9, 2018. Issue No: DPC-0000045 Rev. 7

Ver.:7 Release Date:08/14/2018 狀態:Approved(正式發行)


Recommended pad layout for surface mount leadform

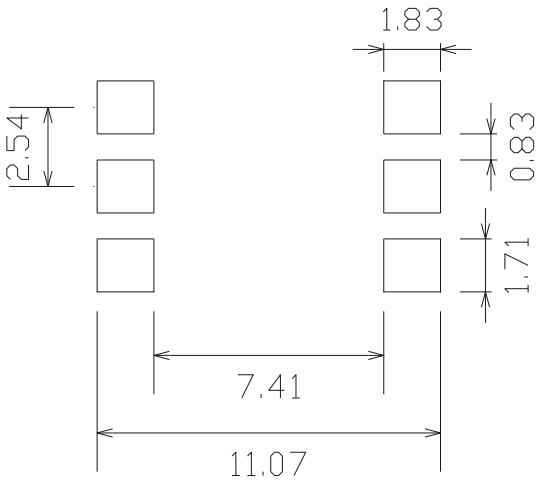

Notes

Suggested pad dimension is just for reference only.
Please modify the pad dimension based on individual need.

Device Marking

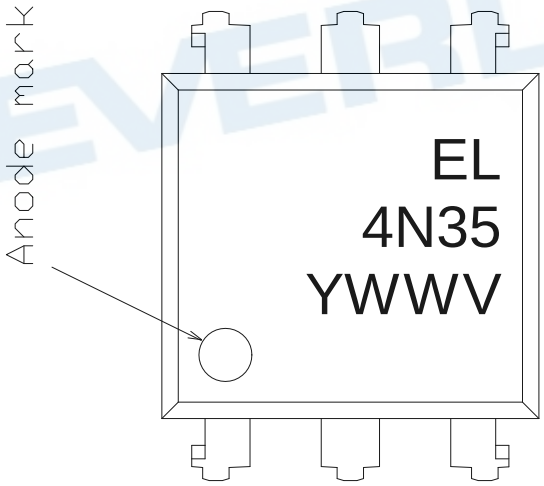

Notes


EL	denotes Everlight
4N35	denotes Device Number
Y	denotes 1 digit Year code
WW	denotes 2 digit Week code
V	denotes VDE (optional)

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug 9, 2018. Issue No: DPC-0000045 Rev. 7

Ver.: 7 Release Date: 08/14/2018 狀態: Approved(正式發行)


Tape & Reel Packing Specifications

Option TA

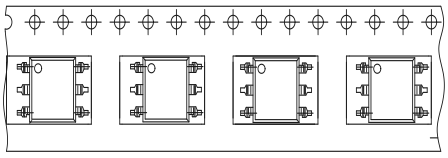


Direction of feed from reel

Option TB

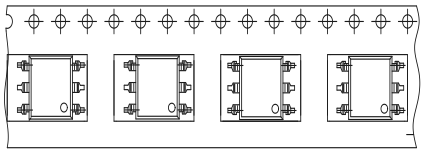

Direction of feed from reel

Tape dimensions

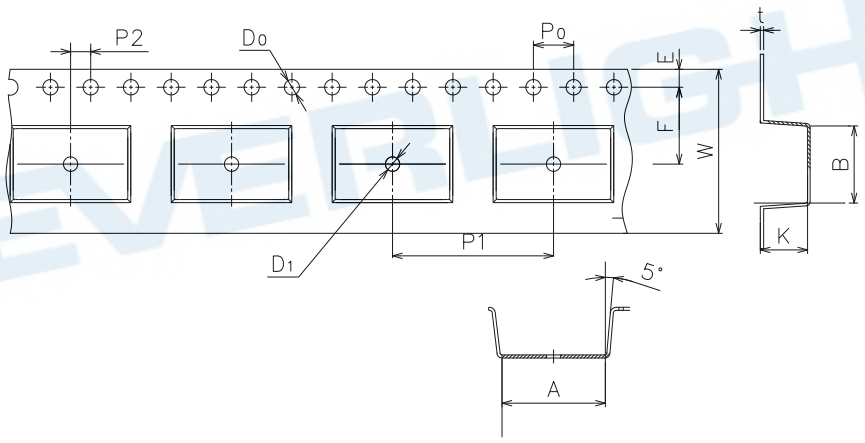

Dimension No.	A	B	Do	D1	E	F
Dimension (mm)	10.8±0.1	7.55±0.1	1.5±0.1	1.5+0.1/-0	1.75±0.1	7.5±0.1
Dimension No.	**Po**	**P1**	**P2**	**t**	**W**	**K**
Dimension (mm)	4.0±0.15	12±0.1	2.0±0.1	0.35±0.03	16.0±0.2	4.5±0.1


Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug 9, 2018. Issue No: DPC-0000045 Rev. 7

Ver.: 7 Release Date: 08/14/2018 狀態: Approved(正式發行)

Precautions for Use

1. Soldering Condition

1.1 (A) Maximum Body Case Temperature Profile for evaluation of Reflow Profile

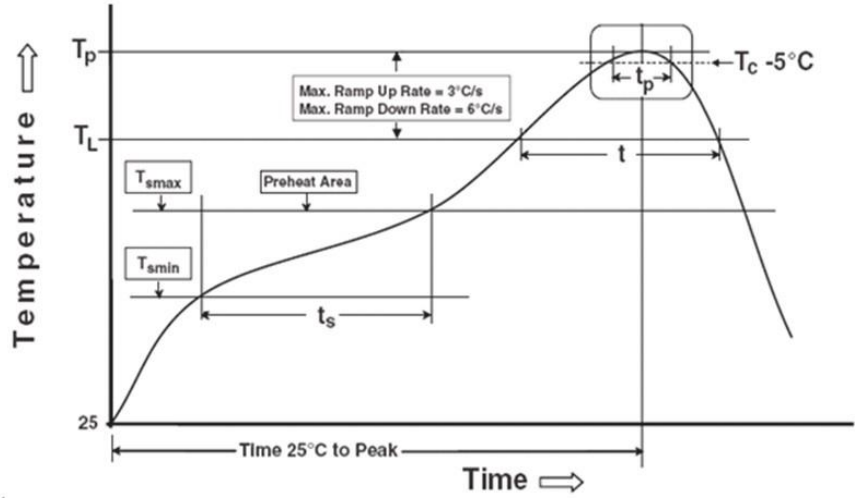

Note: Reference: IPC/JEDEC J-STD-020D

Preheat

Temperature min (T_{smin})	150 °C
Temperature max (T_{smax})	200°C
Time (T_{smin} to T_{smax}) (t_s)	60-120 seconds
Average ramp-up rate (T_{smax} to T_p)	3 °C/second max

Other

Liquidus Temperature (T_L)	217 °C
Time above Liquidus Temperature (t_L)	60-100 sec
Peak Temperature (T_P)	260°C
Time within 5 °C of Actual Peak Temperature: T_P - 5°C	30 s
Ramp- Down Rate from Peak Temperature	6°C /second max.
Time 25°C to peak temperature	8 minutes max.
Reflow times	3 times

.

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug 9, 2018. Issue No: DPC-0000045 Rev. 7

Ver.: 7 Release Date:08/14/2018 狀態:Approved(正式發行)

DISCLAIMER

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
3. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
4. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without the specific consent of EVERLIGHT.
5. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized Everlight sales agent for special application request.
6. Statements regarding the suitability of products for certain types of applications are based on Everlight's knowledge of typical requirements that are often placed on Everlight products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Everlight's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug 9, 2018. Issue No: DPC-0000045 Rev. 7

Ver.: 7 Release Date: 08/14/2018 狀態: Approved(正式發行)