
Model Description of Amass Products

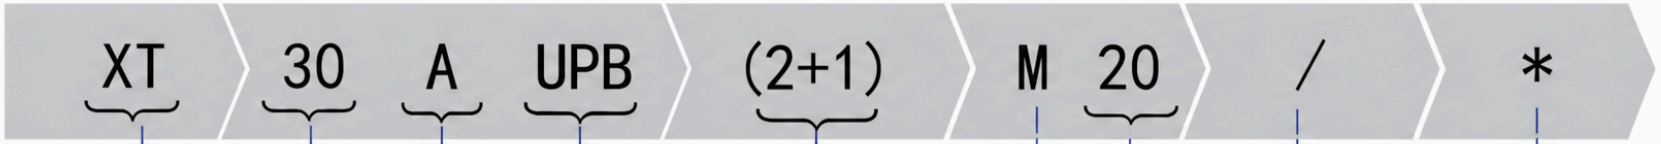

Product Series:
XT, MT,
MR, SH....

Product Specification:
30, 60,
90, 150...

Lantern Spring Contact

Insulator Specification:
PB, PM, PT.....

Contact Arrangement:
(2+1), (2+2) ...

Connector Gender:
-F=Female (Socket)
-M=Male (Plug)

Solder Tail Specification:
2mm, 3mm

Contact Plating:
G=Gold Plated,
N=Nickel Plated...

Product Color:
Y=Yellow,
B=Black....

AMASS SPECIFICATION


VERSION:V1.2

■ Item No: XT30PW-F


■ Patent: 201530416577.6



■ Drawing

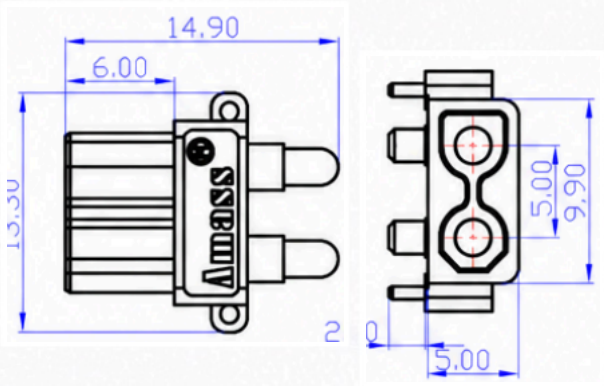

Mounting Hole Diagram

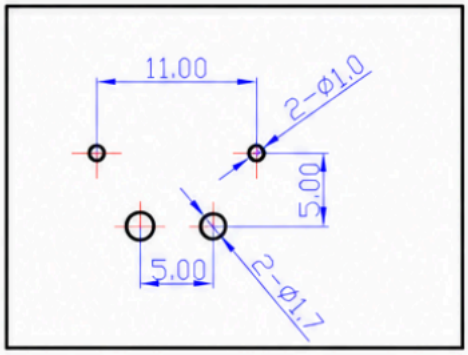

■ Material & Parameter

Item No.	XT30PW-F	Contact Resistance	0.80mΩ
COLOR	3	Rated Voltage	DC 500V
Metal Material	Brass Gold Plated	Rated Current	15A
Plastic Material	PA	Instantaneous Current	30A
FR LEVEL	UL94 V0	USE TIMES	1000 TIMES
Recommend USE	BATTERY	Cable SPEC.	PCB
CERTIFICATION	/	TEMPERATURE	-20℃ to 120℃

★Note: The user's use and environment may vary, and the test methods and conditions may also vary. Please contact Amass to confirm!