




Notes:
1.Material:
Contact:High Performance Copper Alloy.
Shielding Cover:High Performance Copper Alloy.
Housing:High Temperature Theroplastic.
2.Finish:
Contact:50u" Nickel Underplating Overall.
Gold Flash on Contact Area & Soldertail.
Shielding Cover:50u" Nickel Underplating Overall.
See Order Information on Contact Area & Soldertail














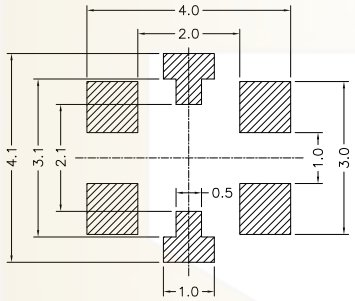


Recommand PCB Layout



Recommand Stencil Mask Pattern
(Mask Thickness 0.10~0.12mm)



NORMAL CLOSE



NORMAL OPEN

			GENERL TOLERANCE	制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL.	审 核 CHECK					
			X.X ±0.30	批 准 APPROVAL		产品名称 TITLE	天线座	版 本 REV.	A
1	初版发行		X.XX ±0.20 X.XXX ±0.10	比 例 SCALE		产品料号 PART NO.	HC-RF-C90-101	单 位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle ±3.0°	投 影 Projection		材 料 MATERIAL		页 次 SHEET	1/1

深圳市华灿天禄电子有限公司 工程专用章