

RoHS

REV	ECN NO.	DESRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2024.04.24

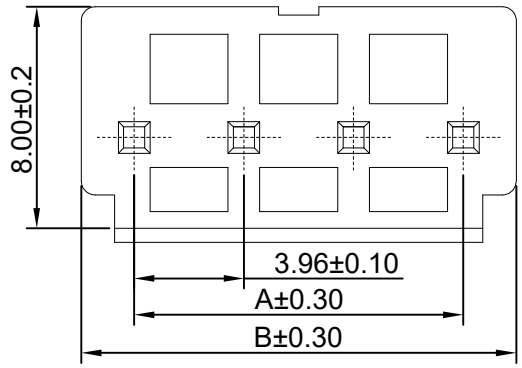

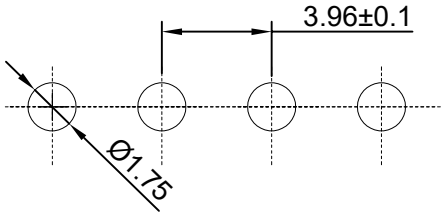


SPECIFICATIONS
1. Current rating: 7A
2. Temperature range: -40°C ~ +105°C
3. Insulation resistance: 1000MΩ Min.
4. Withstanding voltage: 1500V AC/ minute.
5. Contact resistance: 10mΩ Max.


Material:
Insulator Material:PA66 UL94V-0
Contact Material:Brass
Contact Plating:Tin-Plated
Mate with XFCN P3960 series Housing

Ordering Code:

M3960R-XX
1 2

1.序列号
2.Pin位数: 02-16P

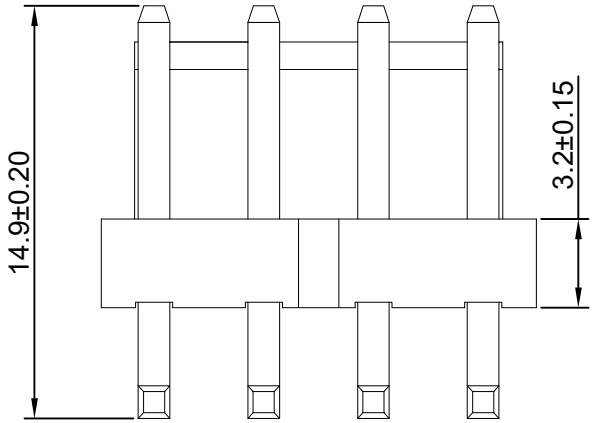

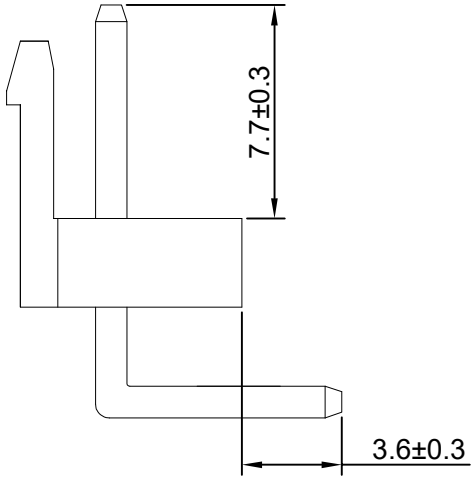

No.of PIN/ROW	Dimension A	B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60
11	39.60	73.56
12	43.56	47.52
13	47.52	51.84
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36

X.±0.50	X.°±
.X±0.25	.X°±
.XX±0.15	.XX°±
.XXX±0.10	.XXX°±
UNITS:	mm

PART NO: M3960R-XX

TITLE: 3.96mm Crimp Style Connectors

XFCN兴飞连接器

0769-82001899

www.xfconn.com

DWG NO: /

APPD	Chen ZhiQiang			
CHKD	Liu Wei	VIEW		
DRAW	Chen HongJiang	SCALE	SHEET	REV
DATE	2024.08.01	NONE	1/1	A1

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED,COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN