
Description：

This N-Channel MOSFET uses advanced trench technology and design to provide excellent $R_{DS(on)}$ with low gate charge.


It can be used in a wide variety of applications.



TO-252

Features：

1) V_{DS}=30V,I_D=55A,$R_{DS(ON)}$<10mΩ @V_{GS}=10V
2) Low gate charge.
3) Green device available.
4) Advanced high cell denity trench technology for ultra low $R_{DS(ON)}$.
5) Excellent package for good heat dissipation.

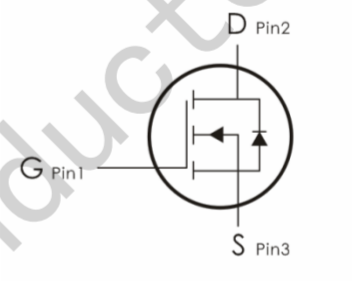

Absolute Maximum Ratings： (T_C=25℃ unless otherwise noted)

Symbol	Parameter	Ratings	Units
V_{DS}	Drain-Source Voltage	30	V
V_{GS}	Gate-Source Voltage	±20	V
I_D	Continuous Drain Current-T_C=25℃[1]	55	A
	Continuous Drain Current-T_C=100℃	30	
	Pulsed Drain Current[2]	112	
E_{AS}	Single Pulse Avalanche Energy[3]	24.2	mJ
I_{AS}	Avalanche Current	22	A
P_D	Power Dissipation,T_C=25℃[4]	37.5	W
T_J, T_{STG}	Operating and Storage Junction Temperature Range	-55 to +175	℃

Thermal Characteristics：

Symbol	Parameter	Max	Units
$R_{\theta JC}$	Thermal Resistance,Junction to Case[1]	4	℃/W
$R_{\theta JA}$	Thermal Resistance Junction-Ambient [1]	62	℃/W

JSMICRO Semiconductor

Electrical Characteristics: (T_C=25℃ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
Off Characteristics						
BV_{DSS}	Drain-Sourtce Breakdown Voltage	V_{GS}=0V,I_D=250μA	30	---	---	V
I_{DSS}	Zero Gate Voltage Drain Current	V_{GS}=0V, V_{DS}=30V	---	---	1	μA
I_{GSS}	Gate-Source Leakage Current	V_{GS}=±20V, V_{DS}=0A	---	---	±100	nA
On Characteristics						
$V_{GS(th)}$	GATE-Source Threshold Voltage	V_{GS}=V_{DS}, I_D=250μA	1.2	---	2.5	V
$R_{DS(ON)}$	Drain-Source On Resistance[2]	V_{GS}=10V,I_D=30A	---	7.5	10	mΩ
		V_{GS}=4.5V,I_D=15A	---	11	18	
Dynamic Characteristics						
C_{iss}	Input Capacitance	V_{DS}=15V, V_{GS}=0V, f=1MHz	---	940	---	pF
C_{oss}	Output Capacitance		---	131	---	
C_{rss}	Reverse Transfer Capacitance		---	109	---	
Switching Characteristics						
$t_{d(on)}$	Turn-On Delay Time	V_{DD}=15V, I_D=15A, V_{GS}=10V,R_{GEN}=3.3Ω	---	4	---	ns
t_r	Rise Time		---	8	---	ns
$t_{d(off)}$	Turn-Off Delay Time		---	31	---	ns
t_f	Fall Time		---	4	---	ns
Q_g	Total Gate Charge	V_{GS}=4.5V, V_{DS}=15V, I_D=15A	---	9.8	---	nC
Q_{gs}	Gate-Source Charge		---	4.2	---	nC
Q_{gd}	Gate-Drain “Miller” Charge		---	3.6	---	nC
Drain-Source Diode Characteristics						

JSMICRO Semiconductor

V_{SD}	Source-Drain Diode Forward Voltage	V_{GS}=0V,I_S=1A	---	---	1	V
Is	Continuous Source Current[1.5]	V_G=V_D=0V , Force Current	---	---	43	A
I_{SM}	Pulsed Source Current[2.5]		---	--	112	Ns
Trr	Reverse Recovery Time	I_F=30A , dI/dt=100A/μs , T_J=25℃	---	8.5	---	
Qrr	Reverse Recovery Charge		---	2.2	---	

Notes:

1.The data tested by surface mounted on a 1 inch^2 FR-4 board with 2OZ copper.
2.The data tested by pulsed , pulse width ≦ 300us , duty cycle ≦ 2%
3.The EAS data shows Max. rating . The test condition is V_{DD}=25V,V_{GS}=10V,L=0.1mH,I_{AS}=22A
4.The power dissipation is limited by 175℃ junction temperature
5.The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.

Typical Characteristics: (T_C=25℃ unless otherwise noted)

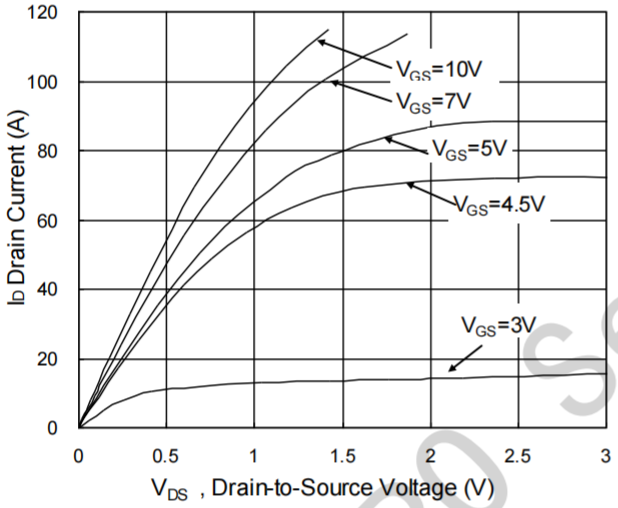


Fig.1 Typical Output Characteristics

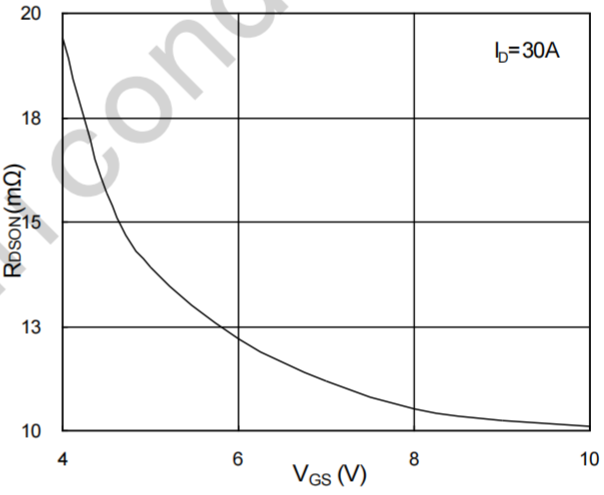


Fig.2 On-Resistance vs. G-S Voltage

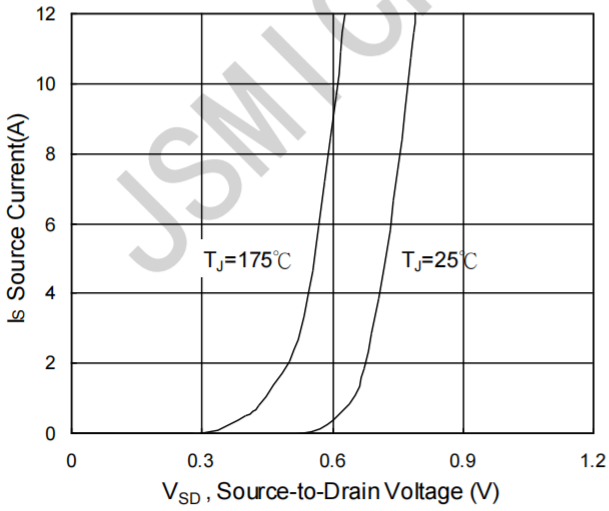


Fig.3 Forward Characteristics of Reverse

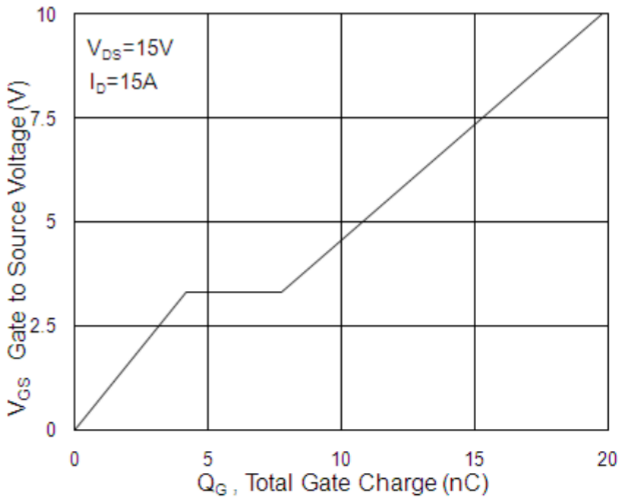


Fig.4 Gate-Charge Characteristics

JSMICPO Semiconductor

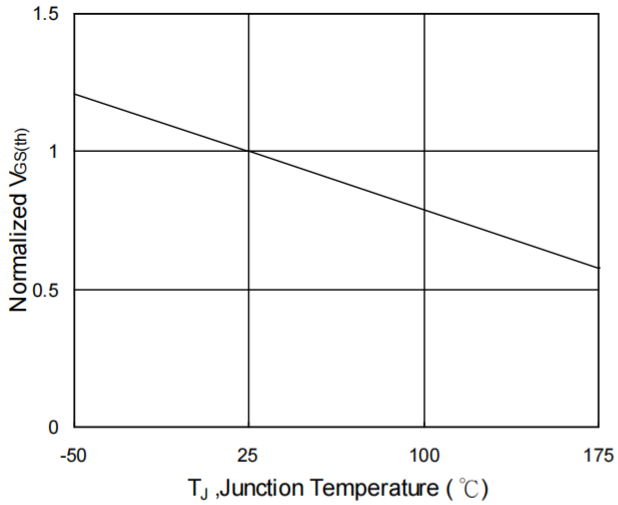


Fig.5 Normalized $V_{GS(th)}$ vs. T_J

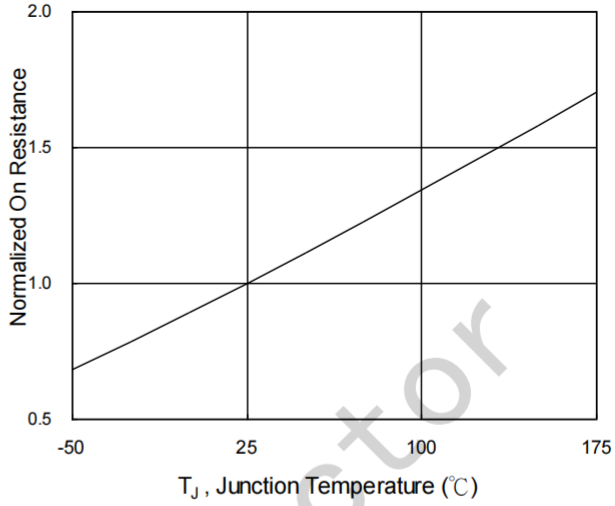


Fig.6 Normalized R_{DSON} vs. T_J

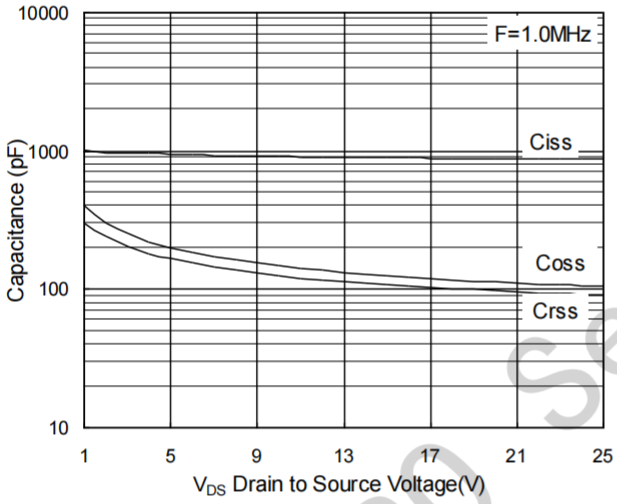


Fig.7 Capacitance

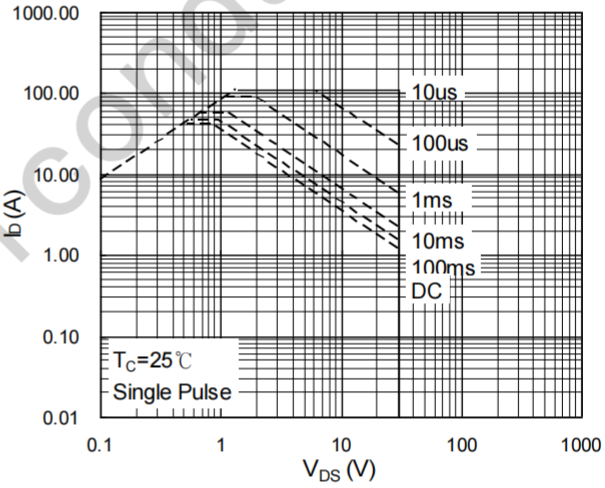


Fig.8 Safe Operating Area


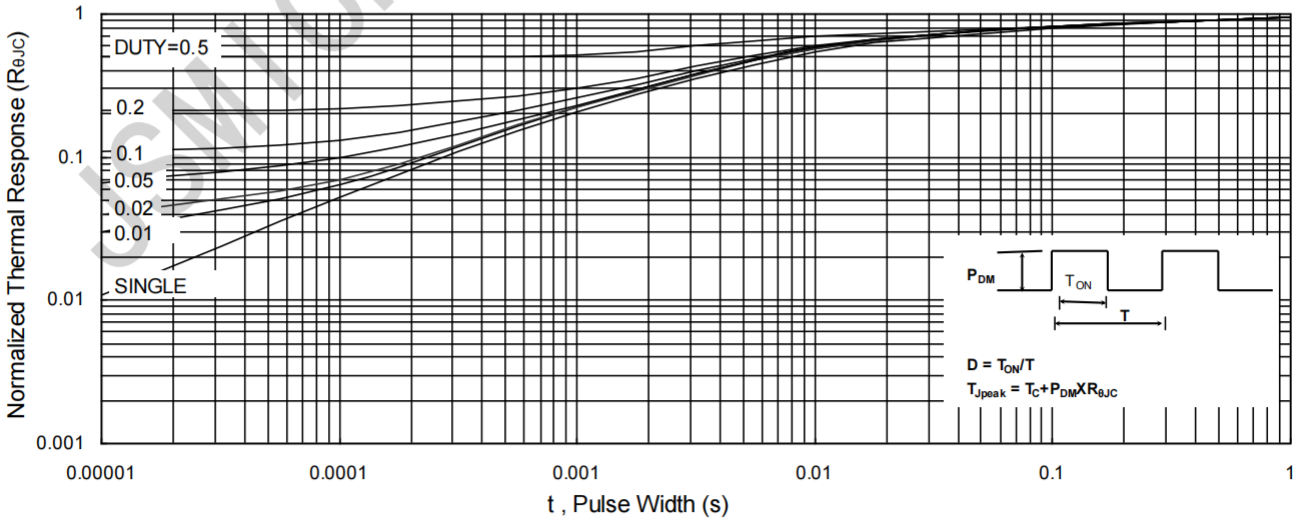


Fig.9 Normalized Maximum Transient Thermal Impedance

JSMICRO Semiconductor

Package Information

TO-252

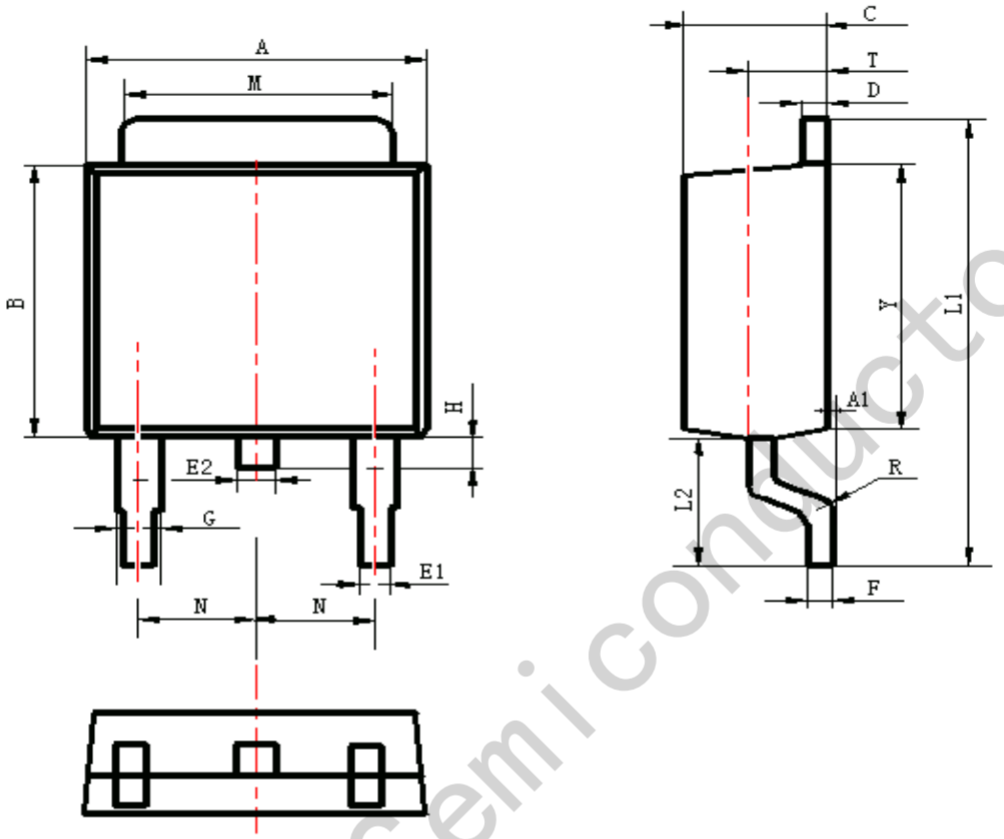

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	6.30	6.90	0.248	0.272
A1	0.00	0.16	0.000	0.006
B	5.70	6.30	0.224	0.248
C	2.10	2.50	0.083	0.098
D	0.30	0.70	0.012	0.028
E1	0.60	0.90	0.024	0.035
E2	0.70	1.00	0.028	0.039
F	0.30	0.60	0.012	0.024
G	0.70	1.20	0.028	0.047
L1	9.60	10.50	0.378	0.413
L2	2.70	3.10	0.106	0.122
H	0.40	1.00	0.016	0.039
M	5.10	5.50	0.201	0.217
N	2.09	2.49	0.082	0.098
R	0.30		0.012	
T	1.40	1.60	0.055	0.063
Y	5.10	6.30	0.201	0.248

JSMICRO Semiconductor