SS1045C THRU SS10200C

10.0 AMP SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS

FEATURES

* Ideal for surface mount applications
* Easy pick and place
* Built-in strain relief
* Low forward voltage drop

MECHANICAL DATA

* Case: Molded plastic
* Epoxy: UL 94V-0 rate flame retardant
* Metallurgically bonded construction
* Polarity: Color band denotes cathode end
* Mounting position: Any
* Weight: 0.21 grams


VOLTAGE RANGE

45 to 200 Volts

CURRENT

10.0Ampere

DO-214AB(SMC)

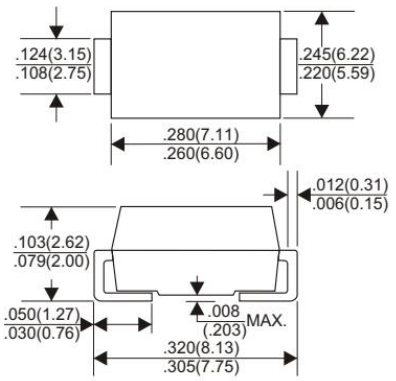

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25 C ambient temperature uniess otherwies specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

TYPE NUMBER	SS1045C	SS1060C	SS10100C	SS10150C	SS10200C	UNITS
Maximum Recurrent Peak Reverse Voltage	45	60	100	150	200	V
Maximum RMS Voltage	32	42	70	105	140	V
Maximum DC Blocking Voltage	45	60	100	150	200	V
Maximum Average Forward Rectified Current See Fig. 1	10.0					A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	175					A
Maximum Instantaneous Forward Voltage at 10.0A	0.55	0.7	0.85	0.92		V
Maximum DC Reverse Current Ta=25 C	0.1		0.02			μA
at Rated DC Blocking Voltage Ta=125°C	5		2			mA
Typical Junction Capacitance (Note1)	440					pF
Typical Thermal Resistance R JA (Note 2)	60					C/W
Operating Temperature Range T_J	— 55 to +150					°C
Storage Temperature Range T_{STG}	55 to +150					°C

NOTES:

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal Resistance Junction to Lead.

RATING AND CHARACTERISTIC CURVES (SS1045C THRU SS10200C)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

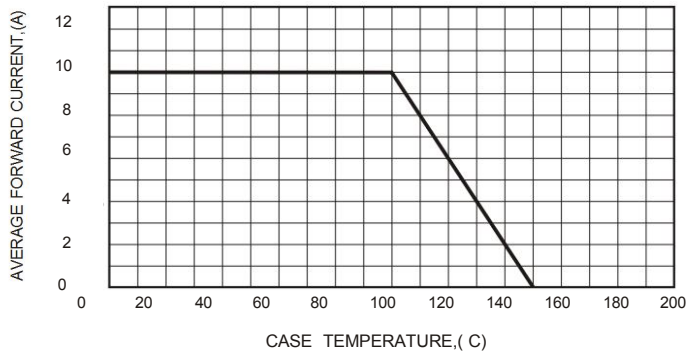


FIG.2-TYPICAL FORWARD CHARACTERISTICS

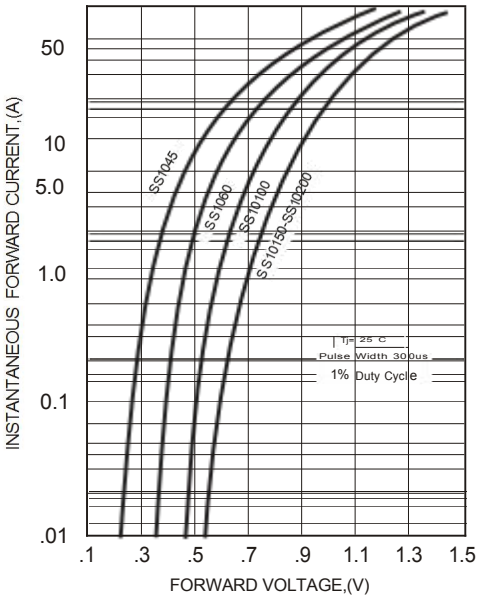


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

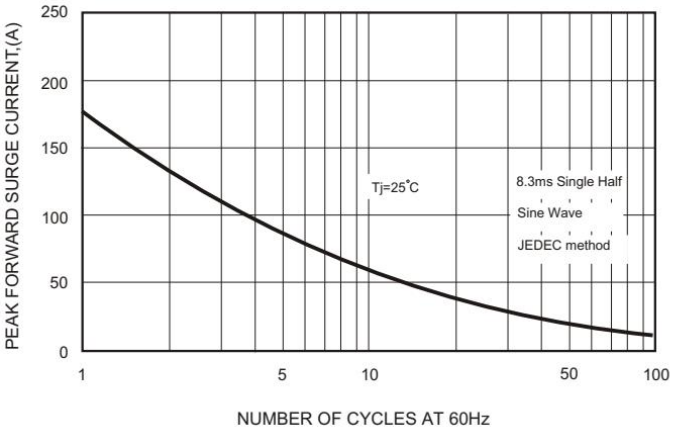


FIG.4-TYPICAL JUNCTION CAPACITANCE

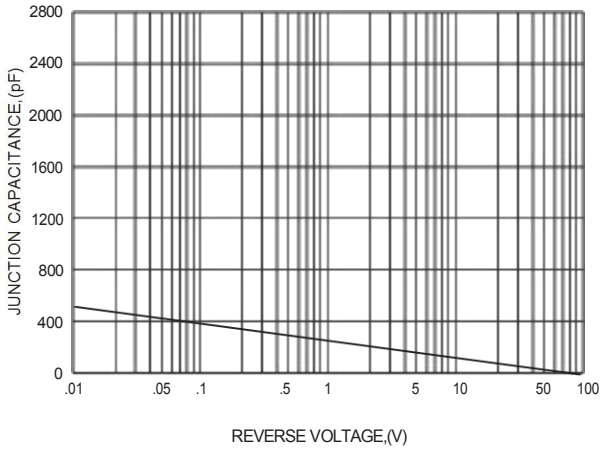


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

