AP4N15MI

150V N-Channel Enhancement Mode MOSFET

Description

The AP4N15MI uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with gate voltages as low as 6V. This device is suitable for use as a Battery protection or in other Switching application.

General Features


V_{DS} = 150V I_D =4A

$R_{DS(ON)}$ < 280mΩ @ V_{GS}=10V


Application

- Battery protection
- Load switch
- Uninterruptible power supply

Pin Configuration



Dimensions SOT-23-3L



Package Marking and Ordering Information

Device	Device Marking	Device Package	Reel Size	Tape width	Quantity
AP4N15MI	MAB5	SOT-23-3L	Ø180mm	8 mm	3000 units

Absolute Maximum Ratings (TC=25℃unless otherwise noted)

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	150	V
V_{GS}	Gate-Source Voltage	±20	V
I_D@T_A=25℃	Continuous Drain Current, V_{GS} @ 10V[1]	4	A
I_D@T_A=100℃	Continuous Drain Current, V_{GS} @ 10V[1]	1.5	A
I_{DM}	Pulsed Drain Current[2]	9	A
P_D@T_A=25℃	Total Power Dissipation[3]	2	W
T_{STG}	Storage Temperature Range	-55 to 150	℃
T_J	Operating Junction Temperature Range	-55 to 150	℃
$R_{\theta JA}$	Thermal Resistance Junction-ambient [1]	125	℃/W
$R_{\theta JC}$	Thermal Resistance Junction-Case[1]	80	℃/W

Electrical Characteristics (TJ=25℃, unless otherwise noted)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS}=0V I_D=250μA	150	165	-	V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS}=150V,V_{GS}=0V	-	-	1	μA
I_{GSS}	Gate-Body Leakage Current	V_{GS}=±20V,V_{DS}=0V	-	-	±100	nA
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS},I_D=250μA	1.0	1.8	3.0	V
$R_{DS(ON)}$	Drain-Source On-State Resistance	V_{GS}=10V, I_D=1.5A	-	220	280	mΩ
		V_{GS}=4.5V, I_D=1.5A		230	300	mΩ
G_{fs}	Forward Transconductance	V_{DS}=15V,I_D=1.5A	-	3	-	S
C_{lss}	Input Capacitance	V_{DS}=25V,V_{GS}=0V, F=1.0MHz	-	235	-	PF
C_{oss}	Output Capacitance		-	36	-	PF
C_{rss}	Reverse Transfer Capacitance		-	20	-	PF
$t_{d(on)}$	Turn-on Delay Time	V_{DD}=75V,I_D=1A,R_L=75Ω V_{GS}=10V,R_G=6Ω	-	8	-	nS
t_r	Turn-on Rise Time		-	10	-	nS
$t_{d(off)}$	Turn-Off Delay Time		-	20	-	nS
t_f	Turn-Off Fall Time		-	15	-	nS
Q_g	Total Gate Charge	V_{DS}=75V,I_D=1.5A, V_{GS}=10V	-	8		nC
Q_{gs}	Gate-Source Charge		-	1.4	-	nC
Q_{gd}	Gate-Drain Charge		-	2.1	-	nC
V_{SD}	Diode Forward Voltage (Note 3)	V_{GS}=0V,I_S=2A	-	-	1.2	V
I_S	Diode Forward Current (Note 2)		-	-	2	A

Note :

1.The data tested by surface mounted on a 1 inch^2 FR-4 board with 2OZ copper.

2.The data tested by pulsed , pulse width ≦ 300us , duty cycle ≦ 2%

3.The power dissipation is limited by 150℃ junction temperature

4 .The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.

Typical Characteristics

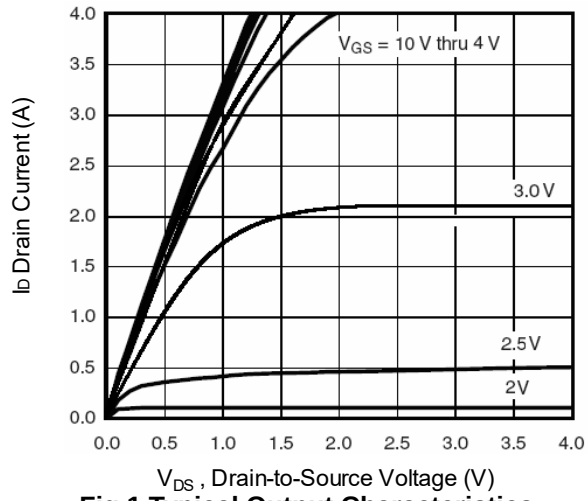


Fig.1 Typical Output Characteristics

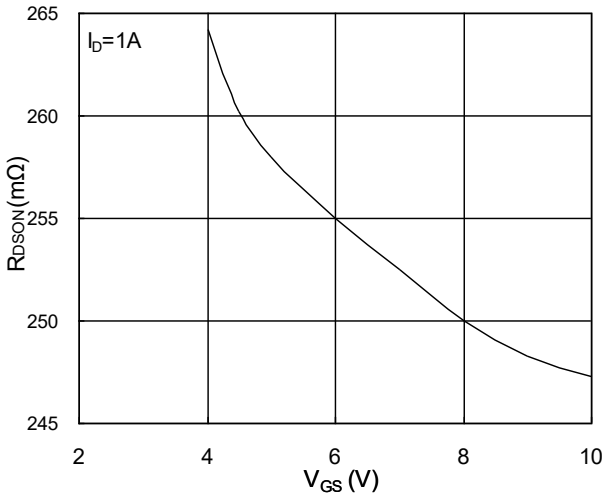


Fig.2 On-Resistance vs. Gate-Source

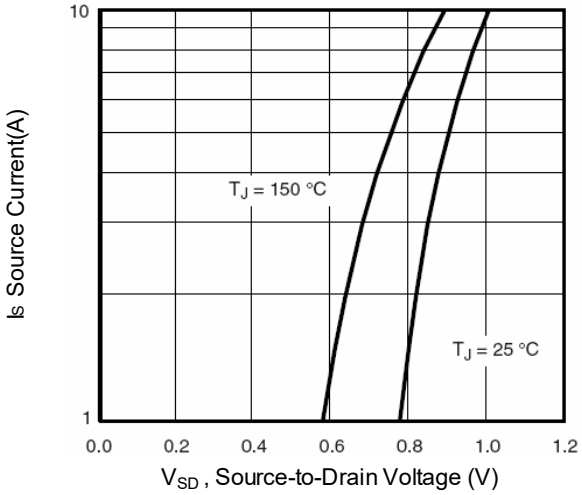


Fig.3 Forward Characteristics of Reverse

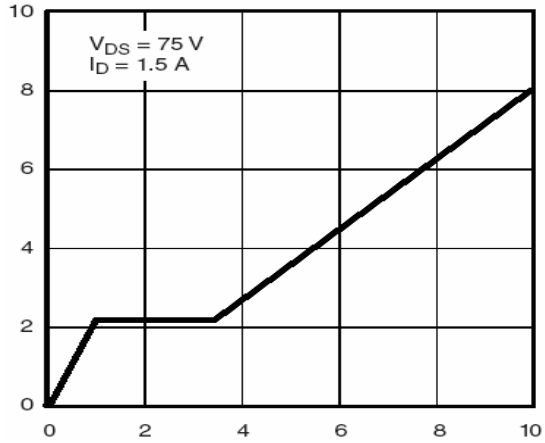


Fig.4 Gate-Charge Characteristics

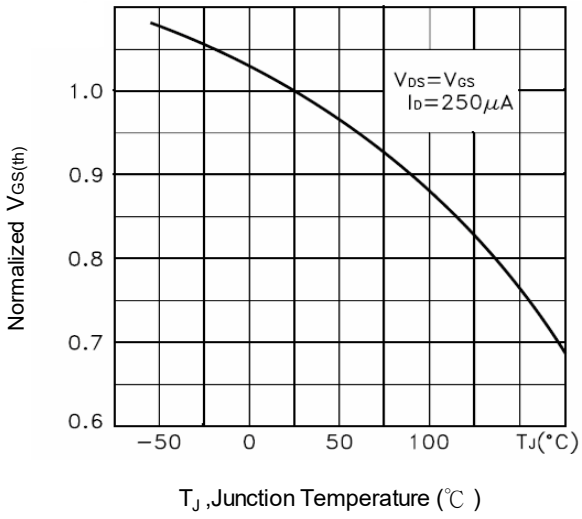


Fig.5 Normalized $V_{GS(th)}$ vs. T_J

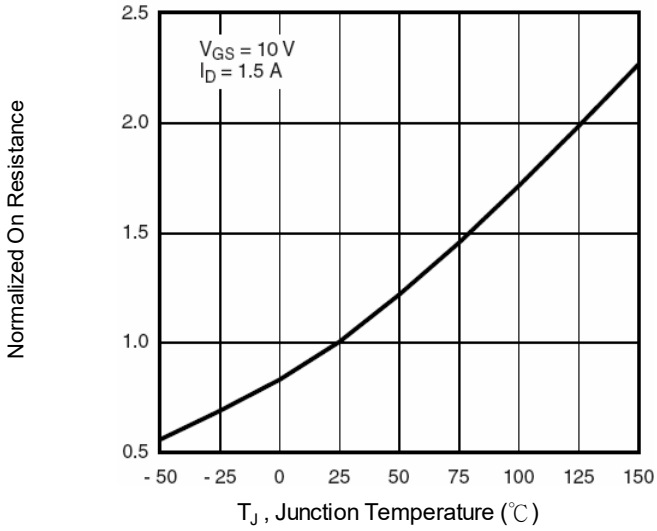


Fig.6 Normalized R_{DSON} vs. T_J

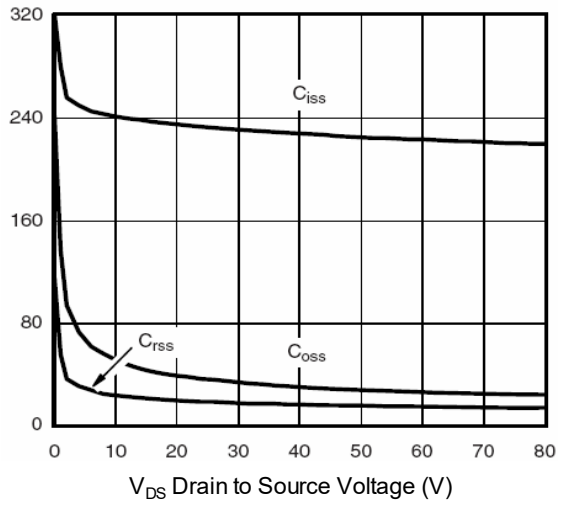


Fig.7 Capacitance

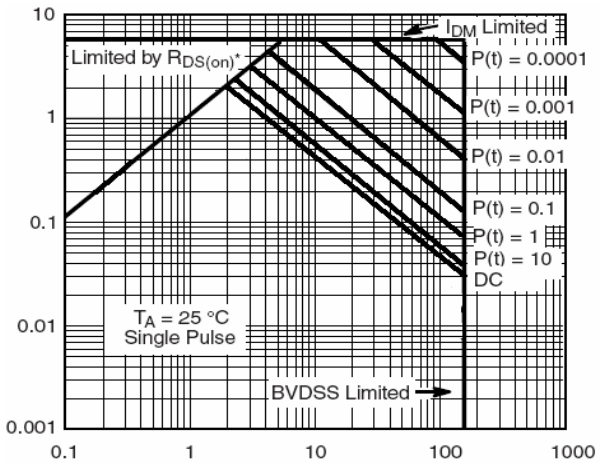


Fig.8 Safe Operating Area

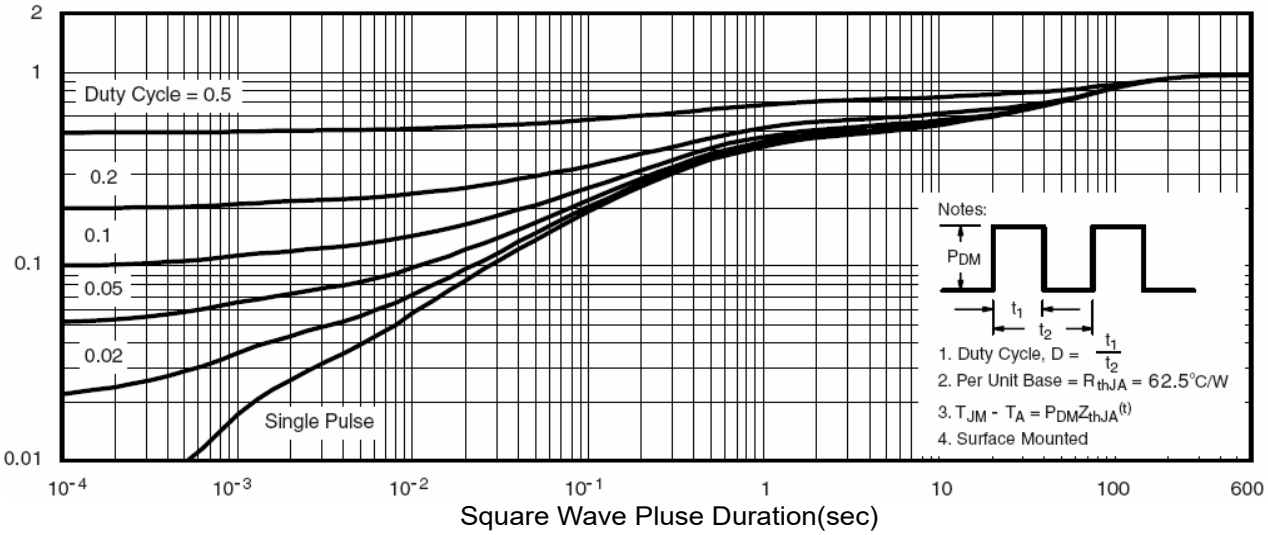


Fig.9 Normalized Maximum Transient Thermal Impedance

Test Circuit & Waveform

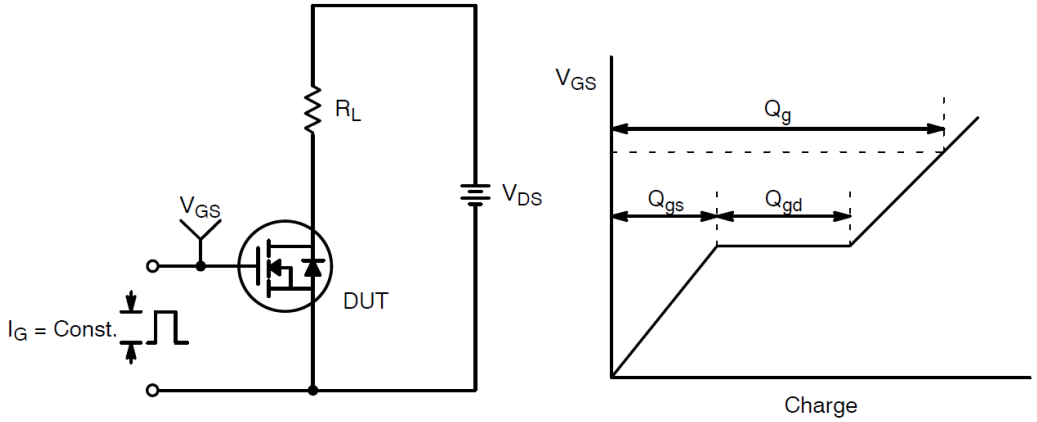


Figure 14: Gate Charge Test Circuit & Waveform

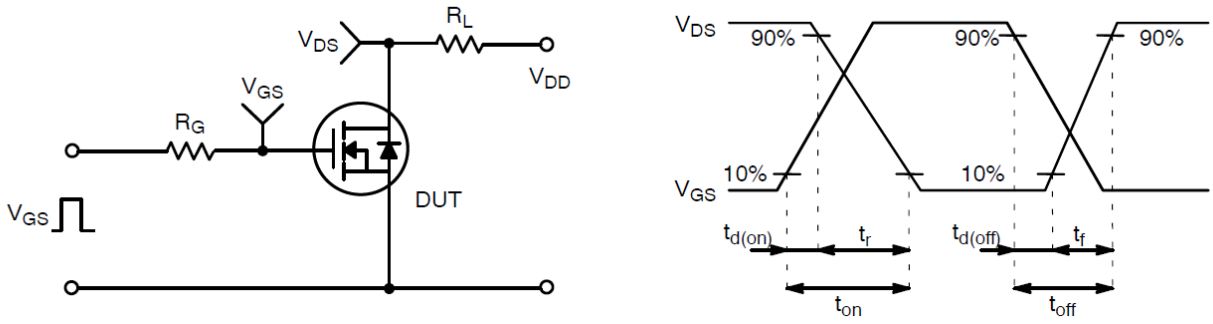


Figure 15: Resistive Switching Test Circuit & Waveforms


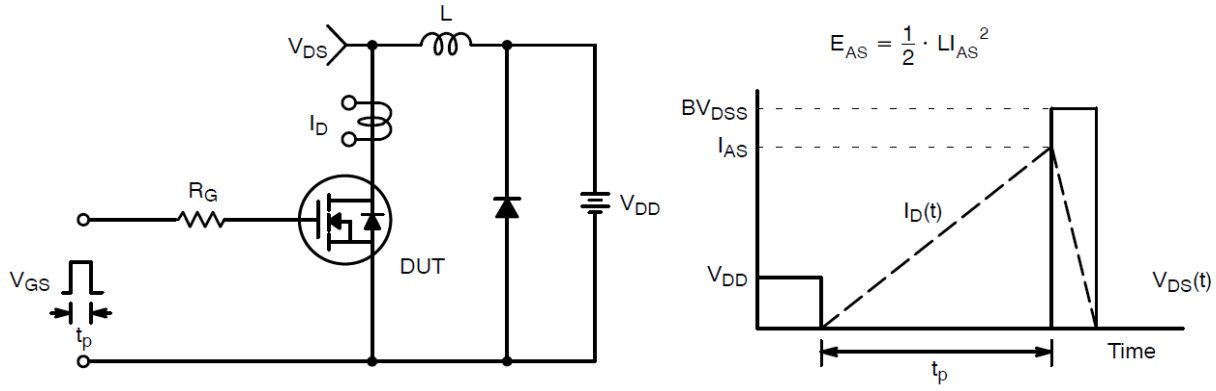


Figure 16: Unclamped Inductive Switching Test Circuit & Waveforms

Package Mechanical Data:SOT-23-3L

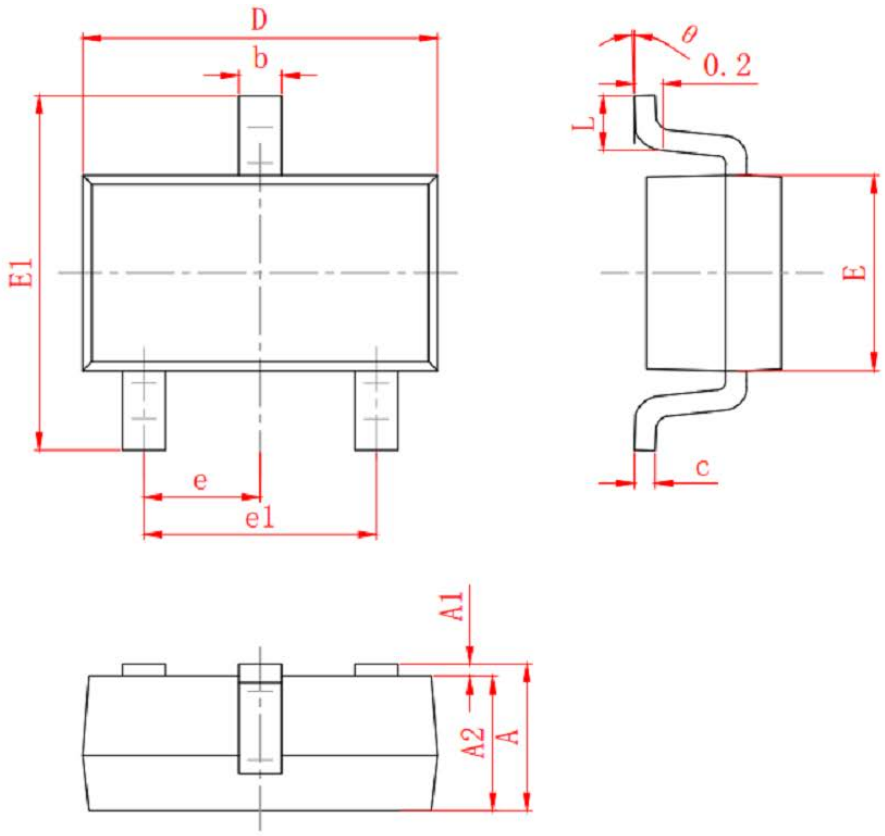

SOT23-3L

SYMBOL	MILLIMETER	
	MIN	MAX
A	1.050	1.250
A1	0.000	0.100
A2	1.050	1.150
b	0.250	0.450
c	0.100	0.200
D	2.820	3.020
E	1.500	1.700
E1	2.650	2.950
e	0.950(BSC)	
e1	1.800	2.000
L	0.300	0.500
θ	0°	8°

单位：mm

NOTICE
Leiditech reserves the right to make modifications,enhancements,improvements,corrections or other changes without further notice to any product herein. Leiditech does not assume any liability arising out of the application or use of any product described herein.

Shanghai Leiditech Electronic Co.,Ltd
Email: sale1@leiditech.com
Tel : +86- 021 50828806
Fax : +86- 021 50477059