AMASS Specification


Version: V1.2

■ Item No.: XT30PW-M


■ Patent No.: 201530416577.6

■ Customer Drawing



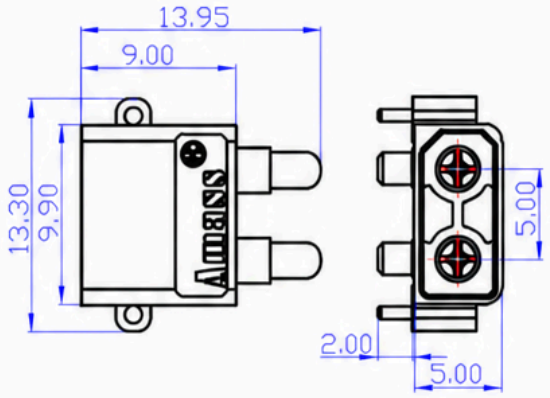

Mounting Hole Diagram

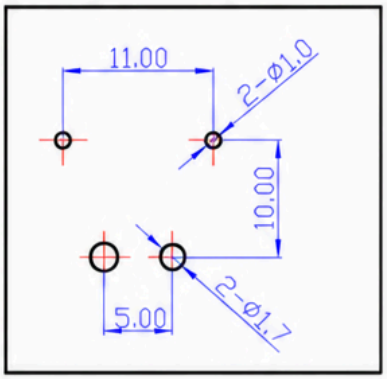

■ Material & Parameter

Item No.	XT30PW-M	Contact Resistance	0.80mΩ
Color	3	Rated Voltage	DC 500V
Metal Material	Brass Gold Plated	Rated Current	15A
Plastic Material	PA	Max Current	30A
FR LEVEL	UL94 V0	USE TIMES	1000 TIMES
Recommended Use	CONTROLLER/ CHARGER	Cable SPEC.	PCB
Certification	/	Operating Temperature	-20°C to 120°C

★ Note: (Data sheet will change according with the test background)