Specifications


Material:
Pin(outer sleeve): Brass,machined CuZn38Pb2
Plating(outer sleeve):
Tin plated:2μm/80μ"Ni, 5μm/200μ"Sn
Gold Plated:2μm/80μ"Ni,Full gold
Insulator(black): Glass filled thermoplastic polyester
UL94V-0
Electrical:
Current rating: 3Amps/contact max.
Contact resistance: ≤4mΩ/contact
Insulation resistance: ≥1000MΩ at V=100V
Operaing voltage: 60VAC/DC

Mechanical:
Operaing temperatures: Gold Plsted:-55℃ to+125℃
Tin plated:-40℃ to+105℃

Ordering Information

RP130-1 04 0 A G R 128 1

- HEIGHT OF HOUSING: 1: Single-Row, 2: Dual-Row, 3: Three Rows of; 30: 3.0mm
- NO. OF PINS PER ROW: 1~40P, 2~40P
- 0: No Pitch, 1: 1.27, 2: 2.00, 3: 2.54, 4: 7.62, 5: 10.16, 6: 15.24, 7: 22.86
- A=1u", B=2u", C=5u", D=10u", E=15u", F=30u", S=Ordinary Tin Plated, H=Half gold plated Tin
- A: PBT, B: PA6T, C: PA9T, D: LCP, G: PPS
- LENGTH OF TERMINAL

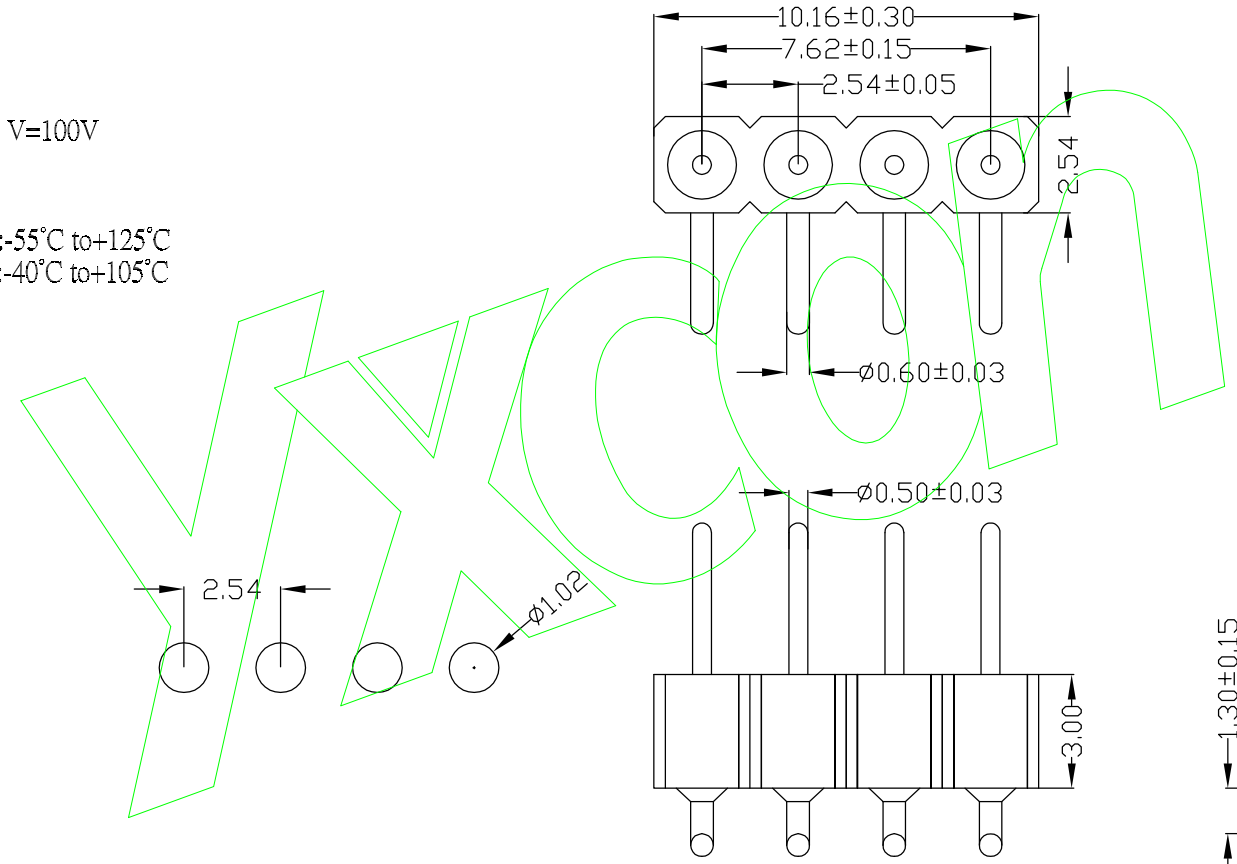

客编:K2236	
注意事项	1. 镀金1U″

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE

OPERATION	
X.X	±0.30
X.XX	±0.15
X.XXX	±0.005
Angle	±5°
DIM	TOL

SCALE	Fit		
UNIT	MM		
SIZE	A4	DESIGN	黄彦宁
SHEET	1/1	CHECK	
PROJ.		APPROVE	

东莞市宇熙精密连接器有限公司
Dongguan Yuxi Electronic Co.,Ltd.

PART NO.	RP130-1040AGR1281
TITLE:	2.54圆排针 1*4P H=3.0 L=12.8 90度 DIP:3.2 内径1.3 接触4.0 PPS料 全金1U″ K2236
Customer No.	