

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.17	阿树

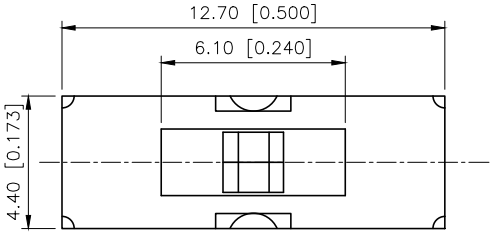






Schematic(shorting)

SS13D75-L3

L(mm)
2~10

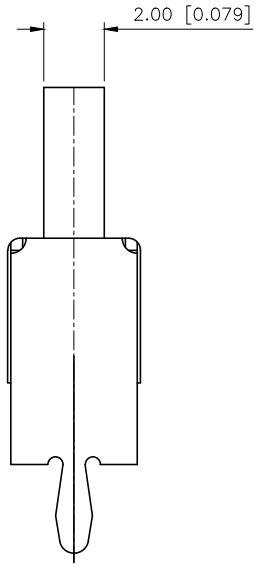

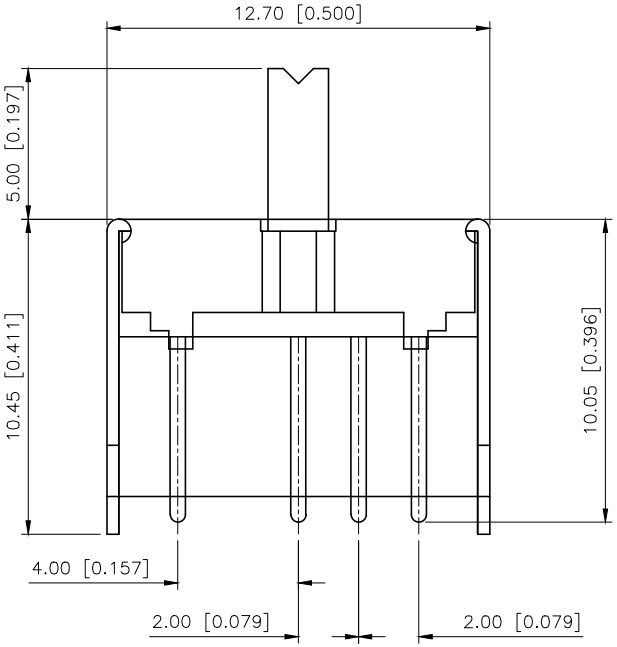

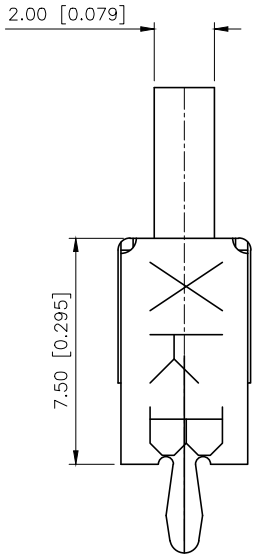

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISITANCE	100MΩ MAX
TRAVEL	2MM
OPERATING FORCE	250±100gf
OPERATING LIFE	10000

ITEM	PAPT NAME	QTY	MATERIAL	FINISHING
5	Terminal	4	Brass（0.30t）	Ag Plated
4	Contact spring	1	Beryllium copper	
3	Base	1	LCP	
2	Cover	1	Sus	Tin plated
1	Keystake	1	Pa66	

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuCES	

XKB Connection 星炬

DESIGN	阿树	VIEW:	MODEL TYPE: SLIDE SWITCH
CHECKED		UNIT: mm/in	PART NO.: SS13D75L3
APPROVED		SIZE: A4	DWG NO.: X-SS13D75L3

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1